

metafun xl

Hans Hagen

Contents

Introduction	2
1 Technology	4
2 Text	6
3 Axis	10
4 Outline	12
5 Followtext	15
6 Placeholder	18
7 Arrow	20
8 Shade	23
9 Contour	29
10 Surface	40
11 Mesh	43
12 Function	47
13 Chart	53
14 SVG	62
15 Poisson	64
16 Fonts	68
17 Color	75
18 Lines	80
19 Paths	81
20 Envelopes	100
21 Groups	112
22 Potrace	113
23 Extensions	118
24 Interface	135

Introduction

For quite a while, around since 1996, the integration of MetaPost into ConT_EXt became sort of mature but, it took decades of stepwise refinement to reach the state that we're in now. In this manual I will discuss some of the features that became possible by combining Lua and MetaPost. We already had quite a bit of that for a decade but in 2018, when LuaMetaT_EX showed up a next stage was started.

Before we go into details it is good to summarize the steps that were involved in integrating MetaPost and T_EX in ConT_EXt. It indicates a bit what we had and have to deal with which in turn lead to the interfaces we now have.

Originally, T_EX had no graphic capabilities: it just needed to know dimensions of the graphics and pass some basic information about what to include to the dvi post processor. So, a MetaPost graphic was normally processed outside the current run, resulting in PostScript graphic, that then had to be included. In pdfT_EX there were some more built in options, and therefore the MetaPost code could be processed runtime using some (generic) T_EX macros that I wrote. However, that engine still had to launch MetaPost for each graphic, although we could accumulate them and do that between runs. Immediate processing means that we immediately know the dimensions, while a collective run is faster. In LuaT_EX this all changed to very fast runtime processing, made possible because the MetaPost library is embedded in the engine, a decision that we made early in the project and never regret.

With pdfT_EX the process was managed by the texexec ConT_EXt runner but with LuaT_EX it stayed under the control of the current run. In the case of pdfT_EX the actual embedding was done by T_EX macros that interpreted the (relatively simple) PostScript code and turned it into pdf literals. In LuaT_EX that job was delegated to Lua.

When using pdfT_EX with independent MetaPost runs support for special color spaces, transparency, embedded graphics, outline text, shading and more was implemented using specials and special colors where the color served as reference to some special extension. This works quite well. In LuaT_EX the pre- and postscript features, which are properties of picture objects, are used.

In all cases, some information about the current run, for instance layout related information, or color information, has to be passed to the rather isolated MetaPost run. In the case of LuaT_EX (and MkIV) the advantage is that processing optional text happens in the same process so there we don't need to pass information about for instance the current font setup.

In LuaT_EX the MetaPost library has a runscript feature, which will call Lua with the given code. This permitted a better integration: we could now ask for specific information (to the T_EX end) instead of passing it from the T_EX end with each run. In LuaMetaT_EX another feature was added: access to the scanners from the Lua end. Although we could already fetch some variables when in Lua this made it possible to extend the MetaPost language in ways not possible before.

Already for a while Alan Braslau and I were working on some new MetaFun code that exploits all these new features. When the scanners came available I sat down and started working on new interfaces and in this manual I will discuss some of these. Some of them are illustrative, others are probably rather useful. The core of what we could call LuaMetaFun (or MetaFun XL when we use the file extension as indicator) is a key-value interface as we have at the T_EX end. This interface relates to ConT_EXt LMTX development and therefore related files have a different suffix: mpxl. However, keep in mind that some are just wrappers around regular MetaPost code so you have the full power of traditional MetaPost at hand.

We can never satisfy all needs, so to some extent this manual also demonstrates how to roll out your own code, but for that you also need to peek into the MetaFun source code too. It will take a while for this manual to complete. I also expect other users to come up with solutions, so maybe in the end we will have a collection of modules for specific tasks.

There is some duplication between this manual and the MetaFun manual which is mostly a side effect of some functionality not being present in MkIV and discussing it in the LuaMetaFun manual would be confusing. Also, from an educational point of view it doesn't hurt to read about it twice.

Because Mikael Sundqvist and I both like MetaPost and we work together on improving existing and exploring new features in the engine as well as MetaFun. Some of the examples in this manual result from that. We have a lot of fun working on this and a side effect this manual benefits a lot from our collaboration.

Hans Hagen
Hasselt NL
August 2021 (and beyond)

1 Technology

The MetaPost library that we use in LuaMetaT_EX is a follow up on the library used in LuaT_EX which itself is a follow up on the original MetaPost program that again was a follow up on Don Knuths MetaFont, the natural companion to T_EX.

When we start with John Hobbies MetaPost we see a graphical engine that provides a simple but powerful programming language meant for making graphics, not the freehand kind, but the more systematic ones. The output is PostScript but a simple kind that can easily be converted to pdf.¹ It's output is very accurate and performance is great.

As part of the LuaT_EX development project Taco Hoekwater turned MetaPost into mplib, a downward compatible library where MetaPost became a small program using that library. But there is more: there are (when enabled) backends that produce png or svg, but when used these also add dependencies on moving targets. The library by default uses the so called scaled numbers: floats that internally are long integers. But it can also work in doubles, decimal and binary and especially the last two create a dependency on libraries. It is good to notice that as in the original MetaPost the PostScript output handling is visible all over the source. Also, the way Type1 fonts are handled has been extended, for instance by providing access to shapes.

At some point a Lua interface got added that made it possible to call out to the Lua instance used in LuaT_EX, so the three concepts: T_EX, MetaPost and Lua can combine forces. A snippet of code can be run, and a result can be piped back. Although there is some limited access to MetaPost internals, the normal way to go is by serializing MetaPost data to the Lua end and let MetaPost scan the result using scantokens.

The library in LuaMetaT_EX is a bit different. Of course it has the same core graphic engine, but there is no longer a backend. In ConT_EXt MkIV the PostScript (and other) backends were not used anyway because it operates on the exported Lua representation of the result. Combined with the `prescript` and `postscript` features introduced in the library that provides all we need to make interesting extensions to the graphical engine (color, shading, image inclusion, text, etc). The MetaPost font support features are also not used because we need support for OpenType and even in MkII (for pdfT_EX and X_YT_EX) we used a different approach to fonts.

It is for that reason that the library we use in LuaMetaT_EX is a leaner version of its ancestor. As mentioned, there is no backend code, only the Lua export, which saves a lot, and there are no traces of font support left, which also drops many lines of code. We forget about the binary number model because it needs a large library that also occasionally changes, but one can add it if needed. This means that there are no dependencies except for decimal but that library is relatively small and doesn't change at all. It also means that the resulting mplib library is much smaller, but it's still a substantial component in LuaMetaT_EX. Internally I use the future version number 3. The original MetaPost program is version 1, so the library got version 2, and that one basically being frozen (it's in bug-fix mode) means that it will stick to that.

Another difference is that from the Lua end one has access to several scanners and also has possibilities to efficiently push back results to the engine. Running scripts can also be done more efficient. This permits a rather efficient (in terms of performance and memory usage) way to extend the language and

¹ For that purpose I wrote a converter in the T_EX language for pdfT_EX, and even within the limitations of T_EX at that time (fonts, number of registers, memory) it worked out quite well.

add for instance key/value based interfaces. There are some more additions, like for instance pre- and postscripts to clip, boundary and group objects. Internals can be numeric, string and boolean. One can use utf input although that has also be added to the ancestor. Some redundant internal input/output remapping has been removed and we are more tolerant to newlines in return values from Lua. Error messages have been normalized, internal documentation cleaned up a bit. A few anomalies have been fixed too. All in- and output is now under Lua control. Etcetera. The (now very few) source files are still cweb files but the conversion to C is done with a Lua script that uses (surprise) the LuaMetaTeX engine as Lua processor. This give a bit nicer C output for when we view it in e.g. Visual Studio too (normally the cweb output is not meant to be seen by humans).

Keep in mind that it's still MetaPost with all it provided, but some has to be implemented in macros or in Lua via callbacks. The simple fact that the original library is the standard and is also the core of MetaPost most of these changes and additions cannot be backported to the original, but that is no big deal. The advantage is that we can experiment with new features without endangering users outside the ConTeXt bubble. The same is true for the Lua interface, which already is upgraded in many aspects.

2 Text

2.1 Typesetting text

The MetaFun `texttext` command normally can do the job of typesetting a text snippet quite well.

```
\startMPcode
  fill fullcircle xyscaled (8cm,1cm) withcolor "darkred" ;
  draw texttext("\bf This is text A") withcolor "white" ;
\stopMPcode
```

We get:



This is text A

You can use regular ConT_EXt commands, so this is valid:

```
\startMPcode
  fill fullcircle xyscaled (8cm,1cm) withcolor "darkred" ;
  draw texttext("\framed{\bf This is text A}") withcolor "white" ;
\stopMPcode
```

Of course you can as well draw a frame in MetaPost but the `\framed` command has more options, like alignments.



This is text A

Here is a variant using the MetaFun interface:

```
\startMPcode
  fill fullcircle xyscaled (8cm,1cm) withcolor "darkred" ;
  draw lmt_text [
    text = "This is text A",
    color = "white",
    style = "bold"
  ] ;
\stopMPcode
```

The outcome is more or less the same:



This is text A

Here is another example. The `format` option is actually why this command is provided.

```
\startMPcode
  fill fullcircle xyscaled (8cm,1cm) withcolor "darkred" ;
  draw lmt_text [
```

```

text    = decimal 123.45678,
color   = "white",
style   = "bold",
format  = "@0.3F",
] ;

```

\stopMPcode

123.457

The following parameters can be set:

name	type	default	comment
offset	numeric	0	
strut	string	auto	adapts the dimensions to the font (yes uses the the default strut)
style	string		
color	string		
text	string		
anchor	string		one of these lft, urt like anchors
format	string		a format specifier using @ instead of a percent sign
position	pair	origin	
trace	boolean	false	

The next example demonstrates the positioning options:

\startMPcode

```

fill fullcircle xyscaled (8cm,1cm) withcolor "darkblue" ;
fill fullcircle scaled .5mm withcolor "white" ;
draw lmt_text [
  text    = "left",
  color   = "white",
  style   = "bold",
  anchor  = "lft",
  position = (-1mm,2mm),
] ;
draw lmt_text [
  text    = "right",
  color   = "white",
  style   = "bold",
  anchor  = "rt",
  offset  = 3mm,
] ;

```

\stopMPcode

left. right

2.2 Strings

Those familiar with T_EX probably know that there's something called catcodes. These are properties that you assign to characters and that gives them some meaning, like regular letters, other characters, spaces, but also escape character (the backslash) or math shift (the dollar). Control over catcodes is what makes for instance verbatim possible.

We show a few possibilities and start by defining a macro:

```
\def\foo{x}
```

```
\framed\bgroup
  \startMPcode
    interim catcoderegime := vrbcatcoderegime ;
    draw texttext("stream $\string\foo$") withcolor "darkred" ;
  \stopMPcode
\egroup
```

```
stream $\foo$
```

```
\framed\bgroup
  \startMPcode
    draw texttext("stream $\foo$") withcolor "darkblue" ;
  \stopMPcode
\egroup
```

```
stream x
```

```
\framed\bgroup
  \startMPcode
    interim catcoderegime := vrbcatcoderegime ;
    draw texttext(stream "!" $\string\foo$) withcolor "darkgreen" ;
  \stopMPcode
\egroup
```

```
stream "!" $\foo$
```

```
\framed\bgroup
  \startMPcode
    draw texttext(stream "!" $\foo$) withcolor "darkyellow" ;
  \stopMPcode
\egroup
```

```
stream "!" x
```

```
\framed\bgroup
  \startMPcode
    draw texttext(\btx stream "!" $\string\foo$\etx) withcolor "darkgreen" ;
  \stopMPcode
```

`\egroup`

```
stream "!" x
```

The `vrbcodesregime` switches to a verbatim catcode regime so the dollars remain dollars. But because we do expand control sequences we have to put `\string` in front.

The (expandable) `\bt` and `\et` commands are aliases for the control characters `0x02` and `0x03`. These are valid string fences in LuaMetaTeX's MetaPost and thereby permit embedding of the double quotes.

3 Axis

The axis macro is the result of one of the first experiments with the key/value interface in MetaFun. Let's show a lot in one example:

```
\startMPcode
  draw lmt_axis [
    sx = 5mm, sy = 5mm,
    nx = 20,  ny = 10,
    dx = 5,   dy = 2,
    tx = 10,  ty = 10,

    list = {
      [
        connect = true,
        color    = "darkred",
        close    = true,
        points   = { (1, 1), (15, 8), (2, 10) },
        texts    = { "segment 1", "segment 2", "segment 3" }
      ],
      [
        connect = true,
        color    = "darkgreen",
        points   = { (2, 2), (4, 1), (10, 3), (16, 8), (19, 2) },
        labels   = { "a", "b", "c", "d", "e" }
      ],
      [
        connect = true,
        color    = "darkblue",
        close    = true,
        points   = { (5, 3), (8, 8), (16, 1) },
        labels   = { "1", "2", "3" }
      ]
    },

    ] withpen pencircle scaled 1mm ;
\stopMPcode
```

This macro will probably be extended at some point.

name	type	default	comment
nx	numeric	1	
dx	numeric	1	
tx	numeric	0	
sx	numeric	1	
startx	numeric	0	
ny	numeric	1	
dy	numeric	1	

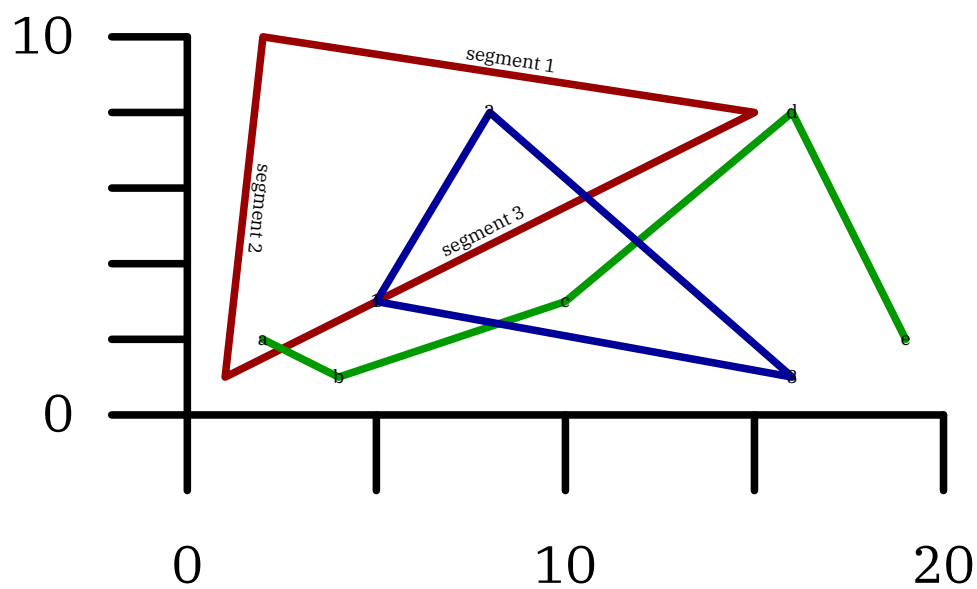


Figure 3.1

ty	numeric	0
sy	numeric	1
starty	numeric	0

samples	list
list	list
connect	boolean false
list	list
close	boolean false
samplecolors	list
axiscolor	string
textcolor	string

4 Outline

In a regular text you can have outline characters by setting a (pseudo) font feature but sometimes you want to play a bit more with this. In MetaFun we always had that option. In MkII we call `pstoedit` to turn text into outlines, in MkIV we do that by manipulating the shapes directly. And, as with some other extensions, in LMTX a new interface has been added, but the underlying code is the same as in MkIV.

In figure 4.1 we see two examples:

```
\startMPcode{doublefun}
  draw lmt_outline [
    text      = "hello"
    kind       = "draw",
    drawcolor  = "darkblue",
  ] xsize .45TextWidth ;
\stopMPcode
```

and

```
\startMPcode{doublefun}
  draw lmt_outline [
    text      = "hello",
    kind       = "both",
    fillcolor  = "middlegray",
    drawcolor  = "darkgreen",
    rulethickness = 1/5,
  ] xsize .45TextWidth ;
\stopMPcode
```

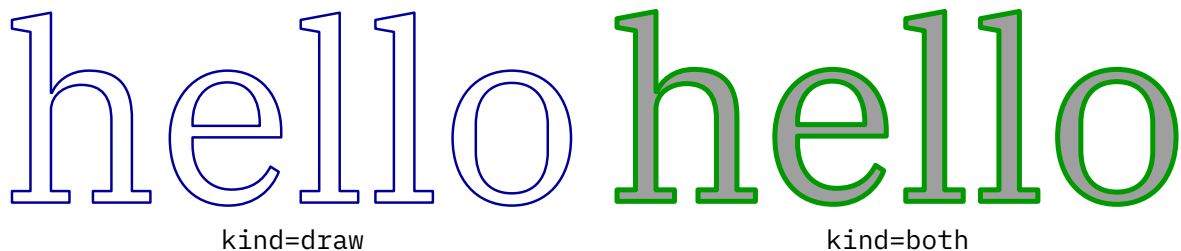


Figure 4.1 Drawing and/or filling an outline.

Normally the fill ends up below the draw but we can reverse the order, as in figure 4.2, where we coded the leftmost example as:

```
\startMPcode{doublefun}
  draw lmt_outline [
    text      = "hello",
    kind       = "reverse",
    fillcolor  = "darkred",
    drawcolor  = "darkblue",
    rulethickness = 1/2,
  ] xsize .45TextWidth ;
\stopMPcode
```

Figure 4.2 Reversing the order of drawing and filling.

It is possible to fill and draw in one operation, in which case the same color is used for both, see figure 4.3 for an example for this. This is a low level optimization where the shape is only output once.

Figure 4.3 Combining a fill with a draw in the same color.

This interface is much nicer than the one where each variant (the parameter `kind` above) had its own macro due to the need to group properties of the outline and fill. Let's show some more:

```
\startMPcode{doublefun}
  draw lmt_outline [
    text      = "\obeydiscretionaries\samplefile{tufte}",
    align     = "normal",
    kind      = "draw",
    drawcolor = "darkblue",
  ] xsize TextWidth ;
\stopMPcode
```

In this case we feed the text into the `\framed` macro so that we get a properly aligned paragraph of text, as demonstrated in figure 4.4 and ???. If you want more trickery you can of course use any ConT_EXt command (including `\framed` with all kind of options) in the text.

We thrive in information–thick worlds because of our marvelous and everyday capacity to select, edit, single out, structure, highlight, group, pair, merge, harmonize, synthesize, focus, organize, condense, reduce, boil down, choose, categorize, catalog, classify, list, abstract, scan, look into, idealize, isolate, discriminate, distinguish, screen, pigeonhole, pick over, sort, integrate, blend, inspect, filter, lump, skip, smooth, chunk, average, approximate, cluster, aggregate, outline, summarize, itemize, review, dip into, flip through, browse, glance into, leaf through, skim, refine, enumerate, glean, synopsise, winnow the wheat from the chaff and separate the sheep from the goats.

Figure 4.4 Outlining a paragraph of text.

```
\startMPcode{doublefun}
  draw lmt_outline [
    text      = "\obeydiscretionaries\samplefile{ward}",
    align     = "normal,tolerant",
```

```

style      = "bold",
width      = 10cm,
kind       = "draw",
drawcolor  = "darkblue",
] xsize TextWidth ;
\stopMPcode

```

The Earth, as a habitat for animal life, is in old age and has a fatal illness. Several, in fact. It would be happening whether humans had ever evolved or not. But our presence is like the effect of an old-age patient who smokes many packs of cigarettes per day—and we humans are the cigarettes.

Figure 4.5 Outlining a paragraph of text with a specific width.

We summarize the parameters:

name	type	default	comment
text	string		
kind	string	draw	One of draw, fill, both, reverse and fillup.
fillcolor	string		
drawcolor	string		
rulethickness	numeric	1/10	
align	string		
style	string		
width	numeric		

5 Followtext

Typesetting text along a path started as a demo if communication between $\text{T}_\text{E}\text{X}$ and MetaPost in the early days of MetaFun. In the meantime the implementation has been modernized a few times and the current implementation feels okay, especially now that we have a better user interface. Here is an example:

```
\startMPcode{doublefun}  
  draw lmt_followtext [  
    text    = "How well does it work {\bf 1}! ",  
    path    = fullcircle scaled 4cm,  
    trace   = true,  
    spread  = true,  
  ] ysize 5cm ;  
\stopMPcode
```

Here is the same example but with the text in the reverse order. The results of both examples are shown in figure 5.1.

```
\startMPcode{doublefun}  
  draw lmt_followtext [  
    text    = "How well does it work {\bf 2}! ",  
    path    = fullcircle scaled 4cm,  
    trace   = true,  
    spread  = false,  
    reverse = true,  
  ] ysize 5cm ;  
\stopMPcode
```

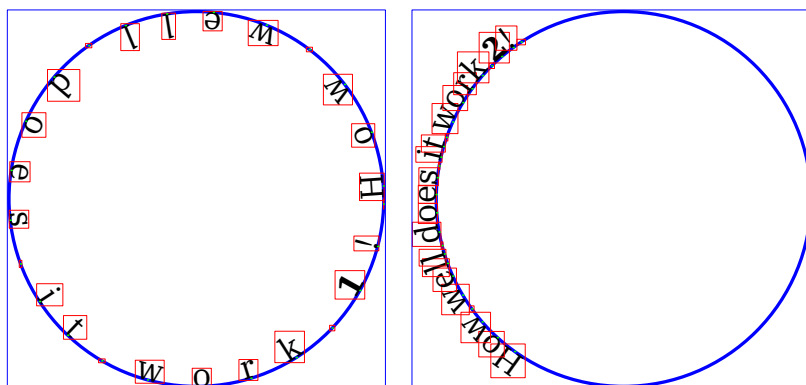


Figure 5.1

There are not that many options. One is `autoscale` which makes the shape and text match. Figure 5.2 shows what happens.

```
\startMPcode{doublefun}  
  draw lmt_followtext [  
    text      = "How well does it work {\bf 3}! ",  
    trace     = true,  
    autoscale = "yes"  
  ]
```



```

] ysize 5cm ;
\stopMPcode

\startMPcode{doublefun}
draw lmt_followtext [
  text      = "How well does it work {\bf 4}! ",
  path      = fullcircle scaled 2cm,
  trace     = true,
  autoscaleup = "max"
] ysize 5cm ;
\stopMPcode

```

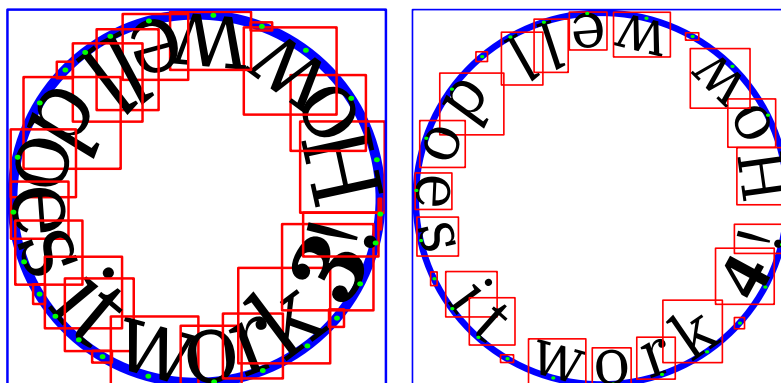


Figure 5.2

You can use quite strange paths, like the one show in figure 5.3. Watch the parenthesis around the path. this is really needed in order for the scanner to pick up the path (otherwise it sees a pair).

```

\startMPcode{doublefun}
draw lmt_followtext [
  text      = "\samplefile {zapf}",
  path      = ((3,0) .. (1,0) .. (5,0) .. (2,0) .. (4,0) .. (3,0)),
  autoscaleup = "max"
] xsize TextWidth ;
\stopMPcode

```

The small set of options is:

name	type	default	comment
text	string		
spread	string	true	
trace	numeric	false	
reverse	numeric	false	
autoscaleup	numeric	no	
autoscaledown	string	no	
path	string	(fullcircle)	

Coming back to the use of typefaces in electronic publishing: many of the new typographers receive their knowledge and information about the rules of typography from books, from computer magazines or the instruction manuals which they get with the purchase of a PC or software. There is not so much basic instructional information as of now, as there was in the old days, showing the differences between good and bad typographic design. Many people are just fascinated by their PC's tricks, and think that a widely praised program, called up on the screen, will make everything automatic from now on. Coming back to the use of typefaces in electronic publishing: many of the new typographers receive their knowledge and information about the rules of typography from books, from computer magazines or the instruction manuals which they get with the purchase of a PC or software. There is not so much basic instructional information as of now, as there was in the old days, showing the differences between good and bad typographic design. Many people are just fascinated by their PC's tricks, and think that a widely praised program, called up on the screen, will make everything automatic from now on.

Figure 5.3

6 Placeholder

Placeholders are an old ConT_EXt features and have been around since we started using MetaPost. They are used as dummy figure, just in case one is not (yet) present. They are normally activated by loading a MetaFun library:

```
\useMPLibrary[dum]
```

Just because it could be done conveniently, placeholders are now defined at the MetaPost end instead of as useable MetaPost graphic at the T_EX end. The variants and options are demonstrated using side floats.



Figure 6.1

```
\startMPcode
  lmt_placeholder [
    width      = 4cm,
    height     = 3cm,
    color      = "red",
    alternative = "circle".
  ] ;
\stopMPcode
```

In addition to the traditional random circle we now also provide rectangles and triangles. Maybe some day more variants will show up.



Figure 6.2

```
\startMPcode
  lmt_placeholder [
    width      = 4cm,
    height     = 3cm,
    color      = "green",
    alternative = "square".
  ] ;
\stopMPcode
```

Here we set the colors but in the image placeholder mechanism we cycle through colors automatically. Here we use primary, rather dark, colors.




Figure 6.3

```
\startMPcode
  lmt_placeholder [
    width      = 4cm,
    height     = 3cm,
    color      = "blue",
    alternative = "triangle".
  ] ;
\stopMPcode
```

If you want less dark colors, the reduction parameter can be used to interpolate between the given color and white; its value is therefore a value between zero (default) and 1 (rather pointless as it produces white).

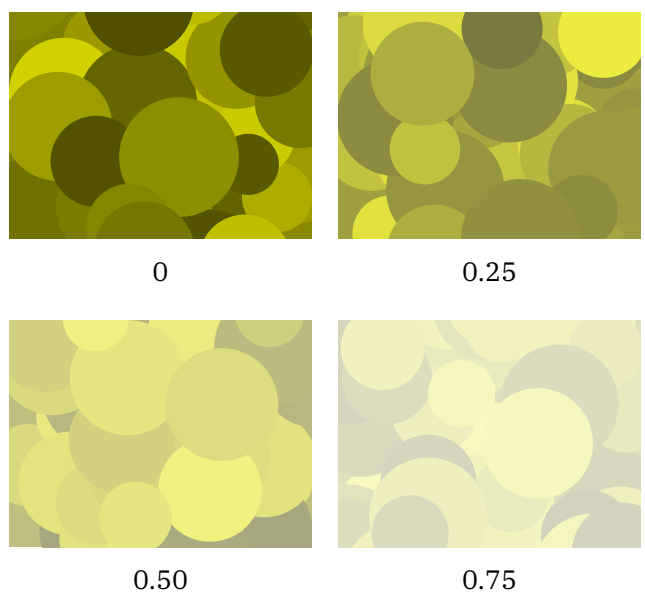


Figure 6.4

We demonstrate this with four variants, all circles. Of course you can also use lighter colors, but this option was needed for the image placeholders anyway.

```
\startMPcode
  lmt_placeholder [
    width      = 4cm,
    height     = 3cm,
    color      = "yellow",
    alternative = "circle".
    reduction  = 0.25,
  ] ;
\stopMPcode
```

There are only a few possible parameters. As you can see, proper dimensions need to be given because the defaults are pretty small.

name	type	default	comment
color	string	red	
width	numeric	1	
height	numeric	1	
reduction	numeric	0	
alternative	string	circle	

7 Arrow

Arrows are somewhat complicated because they follow the path, are constructed using a pen, have a fill and draw, and need to scale. One problem is that the size depends on the pen but the pen normally is only known afterwards.

To some extent MetaFun can help you with this issue. In figure 7.1 we see some variants. The definitions are given below:

```
\startMPcode
draw lmt_arrow [
  path = (fullcircle scaled 3cm),
]
  withpen pencircle scaled 2mm
  withcolor "darkred" ;
\stopMPcode

\startMPcode
draw lmt_arrow [
  path = (fullcircle scaled 3cm),
  length = 8,
]
  withpen pencircle scaled 2mm
  withcolor "darkgreen" ;
\stopMPcode

\startMPcode
draw lmt_arrow [
  path = (fullcircle scaled 3cm rotated 145),
  pen = (pencircle xscaled 4mm yscaled 2mm rotated 45),
]
  withpen pencircle xscaled 1mm yscaled .5mm rotated 45
  withcolor "darkblue" ;
\stopMPcode

\startMPcode
pickup pencircle xscaled 2mm yscaled 1mm rotated 45 ;
draw lmt_arrow [
  path = (fullcircle scaled 3cm rotated 45),
  pen = "auto",
]
  withcolor "darkyellow" ;
\stopMPcode
```

There are some options that influence the shape of the arrowhead and its location on the path. You can for instance ask for two arrowheads:

```
\startMPcode
  pickup pencircle scaled 1mm ;
```


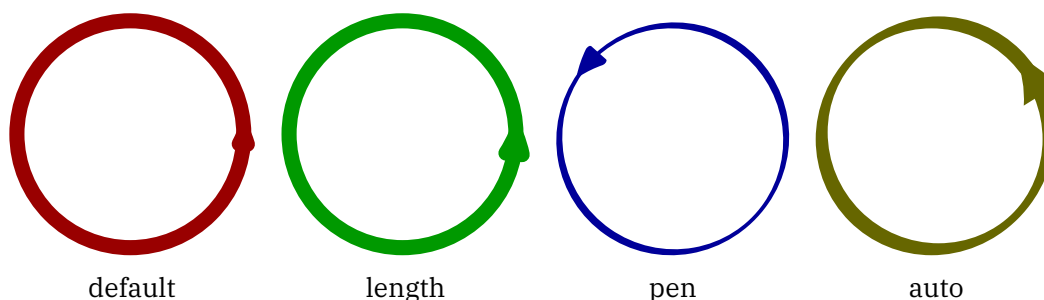


Figure 7.1

```

draw lmt_arrow [
  pen      = "auto",
  location = "both"
  path      = fullcircle scaled 3cm rotated 90,
] withcolor "darkgreen" ;
\stopMPcode

```




The shape can also be influenced although often this is not that visible:

```

\startMPcode
  pickup pencircle scaled 1mm ;
  draw lmt_arrow [
    kind      = "draw",
    pen       = "auto",
    penscale  = 4,
    location  = "middle",
    alternative = "curved",
    path      = fullcircle scaled 3cm,
  ] withcolor "darkblue" ;
\stopMPcode

```



The location can also be given as percentage, as this example demonstrates. Watch how we draw only arrow heads:

```

\startMPcode

```

```

pickup pencircle scaled 1mm ;
for i = 0 step 5 until 100 :
  draw lmt_arrow [
    alternative = "dimpled",
    pen         = "auto",
    location    = "percentage",
    percentage  = i,
    dimple      = (1/5 + i/200),
    headonly    = (i = 0),
    path        = fullcircle scaled 3cm,
  ] withcolor "darkyellow" ;
endfor ;
\stopMPcode

```



The supported parameters are:

name	type	default	comment
path	path		
pen	path		
	string	auto	
kind	string	fill	fill or draw
dimple	numeric	1/5	
scale	numeric	3/4	
penscale	numeric	3	
length	numeric	4	
angle	numeric	45	
location	string	end	end, middle or both
alternative	string	normal	normal, dimpled or curved
percentage	numeric	50	
headonly	boolean	false	

8 Shade

8.1 Shading operators

see *MetaFun manual*.

8.2 Shading interface.

This interface is still experimental!

Shading is complex. We go from one color to another on a continuum either linear or circular. We have to make sure that we cover the whole shape and that means that we have to guess a little, although one can influence this with parameters. It can involve a bit of trial and error, which is more complex than using a graphical user interface but this is the price we pay. It goes like this:

```
\startMPcode
definecolor [ name = "MyColor3", r = 0.22, g = 0.44, b = 0.66 ] ;
definecolor [ name = "MyColor4", r = 0.66, g = 0.44, b = 0.22 ] ;

draw lmt_shade [
  path      = fullcircle scaled 4cm,
  direction = "right",
  domain    = { 0, 2 },
  colors    = { "MyColor3", "MyColor4" },
] ;

draw lmt_shade [
  path      = fullcircle scaled 3cm,
  direction = "left",
  domain    = { 0, 2 },
  colors    = { "MyColor3", "MyColor4" },
] shifted (45mm,0) ;

draw lmt_shade [
  path      = fullcircle scaled 5cm,
  direction = "up",
  domain    = { 0, 2 },
  colors    = { "MyColor3", "MyColor4" },
] shifted (95mm,0) ;

draw lmt_shade [
  path      = fullcircle scaled 1cm,
  direction = "down",
  domain    = { 0, 2 },
  colors    = { "MyColor3", "MyColor4" },
] shifted (135mm,0) ;
\stopMPcode
```

Normally this is good enough as demonstrated in figure 8.1 because we use shades as backgrounds. In the case of a circular shade we need to tweak the domain because guessing doesn't work well.

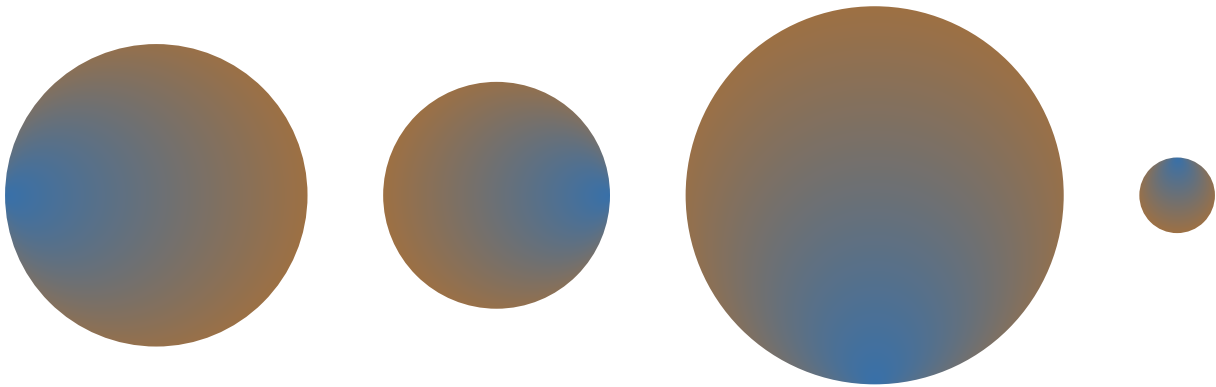


Figure 8.1 Simple circular shades.

```
\startMPcode
draw lmt_shade [
  path      = fullsquare scaled 4cm,
  alternative = "linear",
  direction  = "right",
  colors     = { "MyColor3", "MyColor4" },
] ;

draw lmt_shade [
  path      = fullsquare scaled 3cm,
  direction  = "left",
  alternative = "linear",
  colors     = { "MyColor3", "MyColor4" },
] shifted (45mm,0) ;

draw lmt_shade [
  path      = fullsquare scaled 5cm,
  direction  = "up",
  alternative = "linear",
  colors     = { "MyColor3", "MyColor4" },
] shifted (95mm,0) ;

draw lmt_shade [
  path      = fullsquare scaled 1cm,
  direction  = "down",
  alternative = "linear",
  colors     = { "MyColor3", "MyColor4" },
] shifted (135mm,0) ;
\stopMPcode
```

The direction relates to the boundingbox. Instead of a keyword you can also give two values, indicating points on the boundingbox. Because a boundingbox has four points, the up direction is equivalent to $\{0.5, 2.5\}$.

The parameters center, factor, vector and domain are a bit confusing but at some point the way they were implemented made sense, so we keep them as they are. The center moves the center of the path that is used as anchor for one color proportionally to the bounding box: the given factor is multiplied by half the width and height.



Figure 8.2 Simple rectangular shades.

```
\startMPcode
draw lmt_shade [
  path      = fullcircle scaled 5cm,
  domain    = { .2, 1.6 },
  center     = { 1/10, 1/10 },
  direction = "right",
  colors     = { "MyColor3", "MyColor4" },
  trace     = true,
] ;
\stopMPcode
```

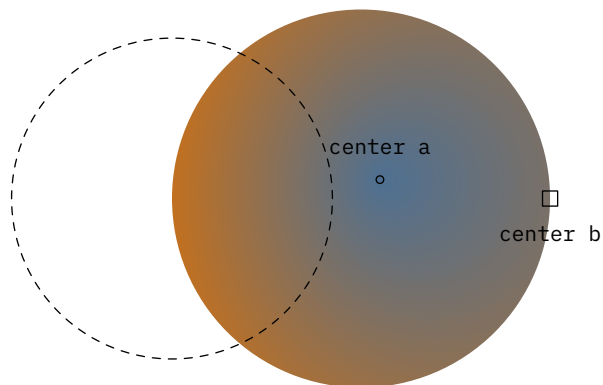


Figure 8.3 Moving the centers.

A vector takes the given points on the path as centers for the colors, see figure 8.4.

```
\startMPcode
draw lmt_shade [
  path      = fullcircle scaled 5cm,
  domain    = { .2, 1.6 },
  vector     = { 2, 4 },
  direction = "right",
  colors     = { "MyColor3", "MyColor4" },
  trace     = true,
] ;
\stopMPcode
```

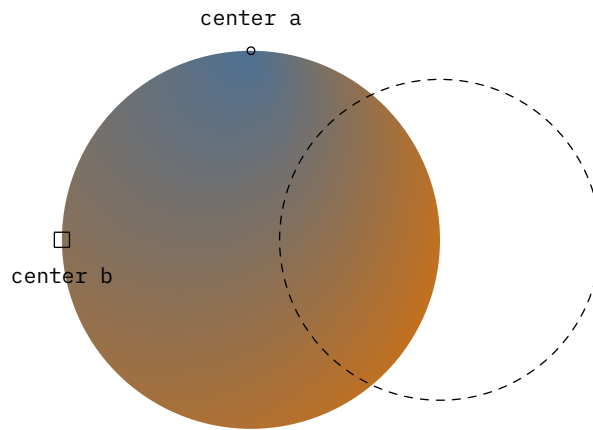


Figure 8.4 Using a vector (points).

Messing with the radius in combination with the previously mentioned domain is really trial and error, as seen in figure 8.5.

```
\startMPcode
draw lmt_shade [
  path      = fullcircle scaled 5cm,
  domain    = { 0.5, 2.5 },
  radius     = { 2cm, 6cm },
  direction = "right",
  colors     = { "MyColor3", "MyColor4" },
  trace     = true,
] ;
\stopMPcode
```

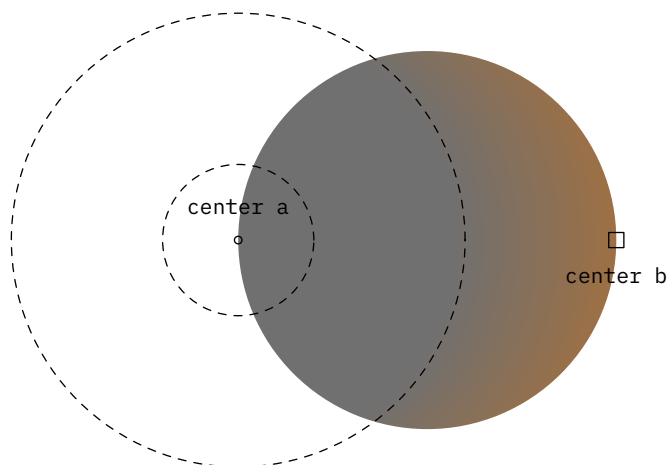


Figure 8.5 Tweaking the radius.

But actually the radius used alone works quite well as shown in figure 8.6.

```
\startMPcode
draw lmt_shade [
  path      = fullcircle scaled 5cm,
  colors     = { "red", "green" },
  trace     = true,
] ;
```

```

draw lmt_shade [
  path      = fullcircle scaled 5cm,
  colors    = { "red", "green" },
  radius    = 2.5cm,
  trace     = true,
] shifted (6cm,0) ;

draw lmt_shade [
  path      = fullcircle scaled 5cm,
  colors    = { "red", "green" },
  radius    = 2.0cm,
  trace     = true,
] shifted (12cm,0) ;
\stopMPcode

```

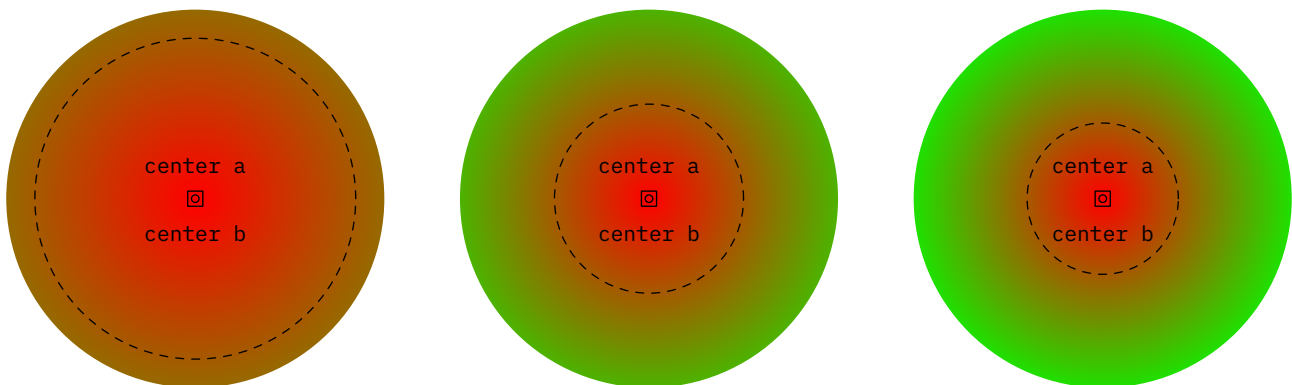


Figure 8.6 Just using the radius.

name	type	default	comment
alternative	string	circular	or linear
path	path		
trace	boolean	false	
domain	set of numerics		
radius	numeric		
factor	set of numerics		
origin	numeric		
	pair		
	set of pairs		
vector	set of numerics		
colors	set of strings		
center	numeric		
	set of numerics		
direction	string		up, down, left, right
	set of numerics		two points on the boundingbox

8.3 Patterns


Instead using a shade one can use a pattern which is basically a fill with a repeated image. Here are some examples:

```

\startMPcode
draw
(
  (fulldiamond xscaled 8cm yscaled 5cm randomizedcontrols 10mm) && reverse
  (fulldiamond xscaled 6cm yscaled 3cm randomizedcontrols 10mm) && cycle
)
withpattern image (fill fullcircle scaled 2mm withcolor "darkyellow" ;)
;
\stopMPcode


```

The image macro produces a picture that is then used for the filling:

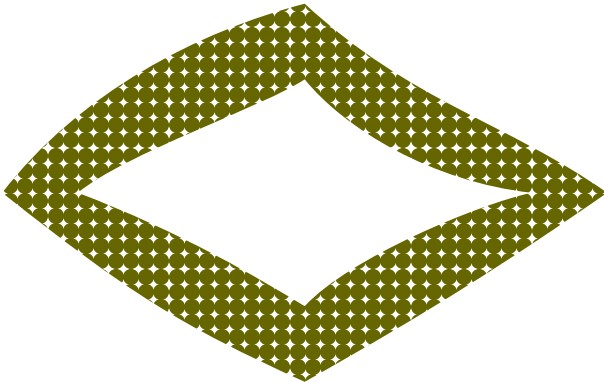

That image can also be an (external) figure:

Of course one needs to find a suitable image for this, but here we just use one of the test figures:

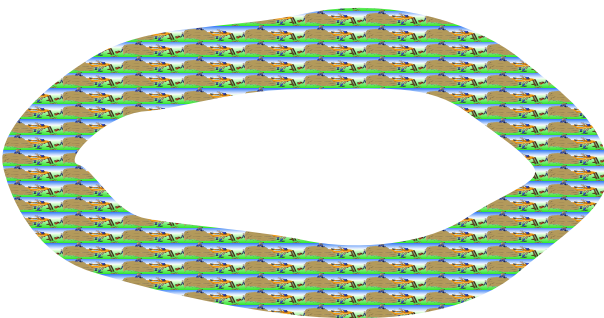

```

\startMPcode
draw
(
  (fullcircle xscaled 8cm yscaled 4cm randomizedcontrols 5mm) && reverse
  (fullcircle xscaled 6cm yscaled 2cm randomizedcontrols 5mm) && cycle
)
withpattern image (draw figure "hacker.jpg" ;)
withpatternscaled (1/10,1/20)
;
\stopMPcode

```

8.4 Luminance

Todo: groups and such.

9 Contour

This feature started out as experiment triggered by a request on the mailing list. In the end it was a nice exploration of what is possible with a bit of Lua. In a sense it is more subsystem than a simple MetaPost macro because quite some Lua code is involved and more might be used in the future. It's part of the fun.

A contour is a line through equivalent values z that result from applying a function to two variables x and y . There is quite a bit of analysis needed to get these lines. In MetaFun we currently support three methods for generating a colorful background and three for putting lines on top:

One solution is to use the the isolines and isobands methods are described on the marching squares page of wikipedia:

https://en.wikipedia.org/wiki/Marching_squares

This method is relative efficient as we don't do much optimization, simply because it takes time and the gain is not that much relevant. Because we support filling of multiple curves in one go, we get efficient paths anyway without side effects that normally can occur from many small paths alongside. In these days of multi megabyte movies and sound clips a request of making a pdf file small is kind of strange anyway. In practice the penalty is not that large.

As background we can use a bitmap. This method is also quite efficient because we use indexed colors which results in a very good compression. We use a simple mapping on a range of values.

A third method is derived from the one that is distributed as C source file at:

<https://physiology.arizona.edu/people/secomb/contours>

<https://github.com/secomb/GreensV4>

We can create a background image, which uses a sequence of closed curves². It can also provide two variants of lines around the contours (we tag them shape and shade). It's all a matter of taste. In the meantime I managed to optimize the code a bit and I suppose that when I buy a new computer (the code was developed on an 8 year old machine) performance is probably acceptable.

In order of useability you can think of isoband (band) with isolines (cell), bitmap (bitmap) with isolines (cell) and finally shapes (shape) with edges (edge). But let's start with a couple of examples.

```
\startMPcode{doublefun}
  draw lmt_contour [
    xmin = 0, xmax = 4*pi, xstep = .05,
    ymin = -6, ymax = 6, ystep = .05,

    levels      = 7,
    height      = 5cm,
    preamble    = "local sin, cos = math.sin, math.cos",
    function    = "cos(x) + sin(y)",
    background  = "bitmap",
    foreground  = "edge",
```

² I have to figure out how to improve it a bit so that multiple path don't get connected.

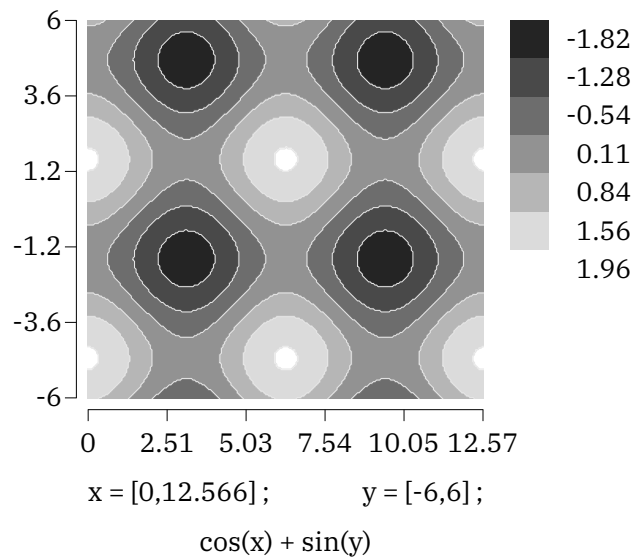


Figure 9.1

```

linewidth = 1/2,
cache     = true,
] ;
\stopMPcode

```

In figure 9.1 we see the result. There is a in this case black and white image generated and on top of that we see lines. The step determines the resolution of the image. In practice using a bitmap is quite okay and also rather efficient: we use an indexed colorspace and, as already was mentioned, because the number of colors is limited such an image compresses well. A different rendering is seen in figure 9.2 where we use the shape method for the background. That method creates outlines but is much slower, and when you use a high resolution (small step) it can take quite a while to identify the shapes. This is why we set the cache flag.

```

\startMPcode{doublefun}
draw lmt_contour [
  xmin = 0, xmax = 4*pi, xstep = .10,
  ymin = -6, ymax = 6, ystep = .10,

  levels      = 7,
  preamble    = "local sin, cos = math.sin, math.cos",
  function    = "cos(x) - sin(y)",
  background  = "shape",
  foreground  = "shape",
  linewidth   = 1/2,
  cache       = true,
] ;
\stopMPcode

```

We mentioned colorspace but haven't seen any color yet, so let's set some in figure 9.3. Two variants are shown: a background shape with foreground shape and a background bitmap with a foreground edge. The bitmap renders quite fast, definitely when we compare with the shape, while the quality is as good at this size.

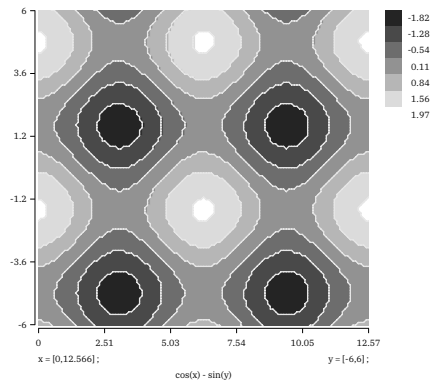


Figure 9.2

```
\startMPcode{doublefun}
  draw lmt_contour [
    xmin = -10, xmax = 10, xstep = .1,
    ymin = -10, ymax = 10, ystep = .1,

    levels      = 10,
    height      = 7cm,
    color       = "shade({1/2,1/2,0},{0,0,1/2})",
    function    = "x^2 + y^2",
    background  = "shape",
    foreground  = "shape",
    linewidth   = 1/2,
    cache       = true,
  ] x sized .45TextWidth ;
\stopMPcode
```

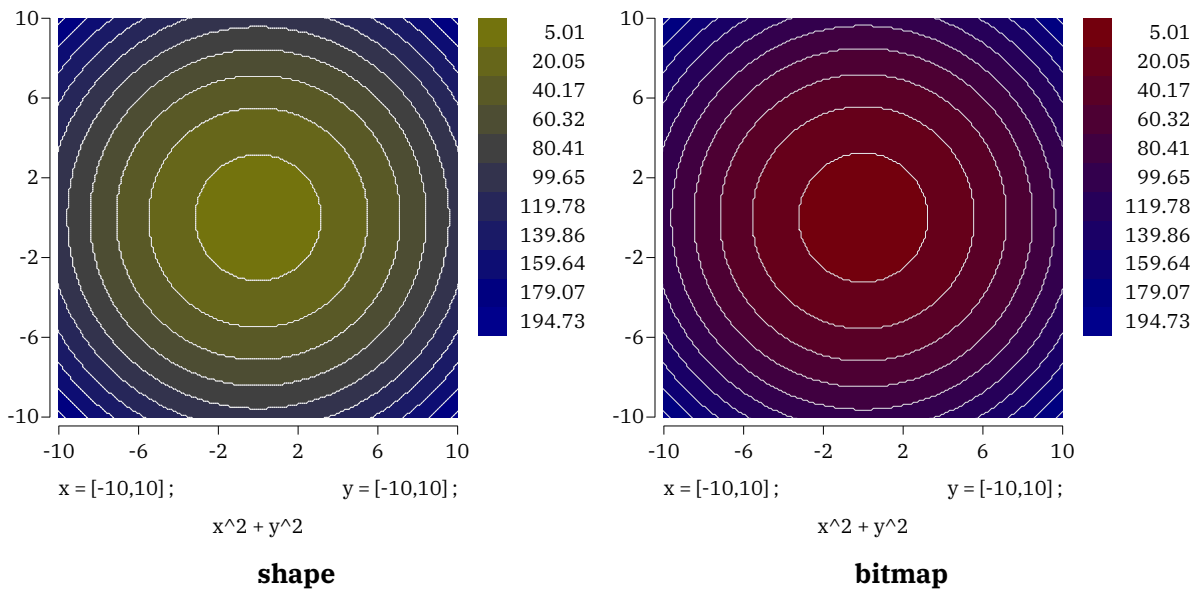


Figure 9.3

We use the doublefun instance because we need to be sure that we don't run into issues with scaled numbers, the default model in MetaPost. The function that gets passed is *not* using MetaPost but Lua, so basically you can do very complex things. Here we directly pass code, but you can for instance also do this:


```

\startluacode
  function document.MyContourA(x,y)
    return x^2 + y^2
  end
\stopluacode

```

and then `function = "document.MyContourA(x,y)"`. As long as the function returns a valid number we're okay. When you pass code directly you can use the `preamble` key to set local shortcuts. In the previous examples we took `sin` and `cos` from the `math` library but you can also roll out your own functions and/or use the more elaborate `xmath` library. The `color` parameter is also a function, one that returns one or three arguments. In the next example we use `lin` to calculate a fraction of the current level and total number of levels.

```

\startMPcode{doublefun}
  draw lmt_contour [
    xmin = -3, xmax = 3, xstep = .01,
    ymin = -1, ymax = 1, ystep = .01,

    levels      = 10,
    default     = .5,
    height      = 5cm,
    function    = "x^2 + y^2 + x + y/2",
    color       = "lin(1), 0, 1/2",
    background  = "bitmap",
    foreground  = "none",
    cache      = true,
  ] xsize TextWidth ;
\stopMPcode

```

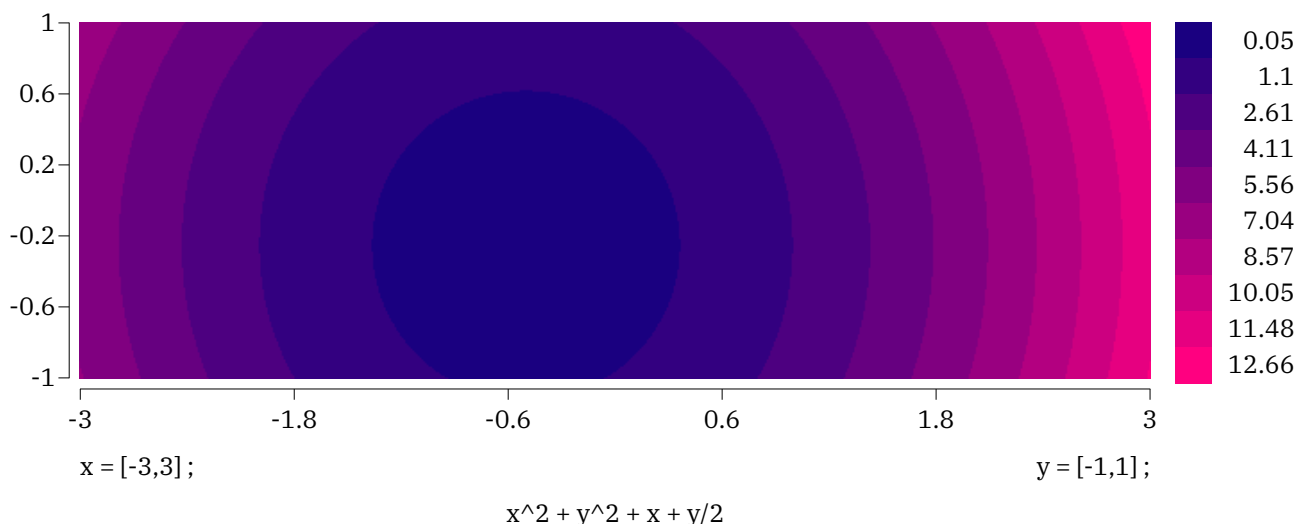


Figure 9.4

Instead of a `bitmap` we can use an `isoband`, which boils down to a set of tiny shapes that make up a bigger one. This is shown in figure 9.5.

```

\startMPcode{doublefun}
  draw lmt_contour [

```

```

xmin = -3, xmax = 3, xstep = .01,
ymin = -1, ymax = 1, ystep = .01,

levels      = 10,
default     = .5,
height      = 5cm,
function    = "x^2 + y^2 + x + y/2",
color       = "lin(1), 1/2, 0",
background  = "band",
foreground  = "none",
cache       = true,
] x sized TextWidth ;

```

\stopMPcode

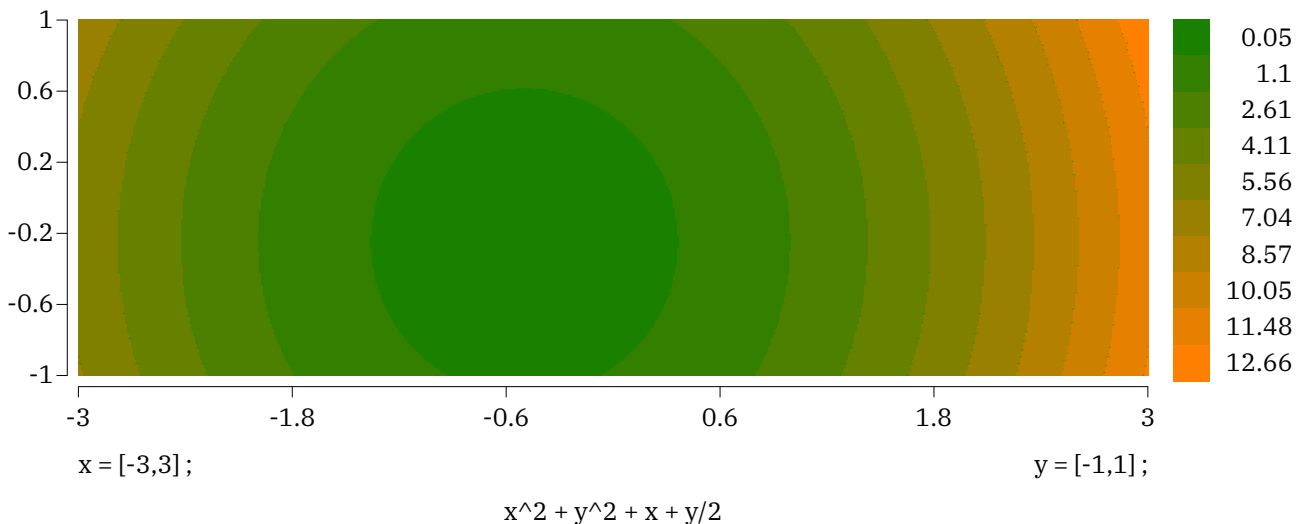


Figure 9.5

You can draw several functions and see where they overlap:

```

\startMPcode{doublefun}
draw lmt_contour [
  xmin = -pi, xmax = 4*pi, xstep = .1,
  ymin = -3, ymax = 3, ystep = .1,

  range      = { -.1, .1 },
  preamble   = "local sin, cos = math.sin, math.cos",
  functions  = {
    "sin(x) + sin(y)", "sin(x) + cos(y)",
    "cos(x) + sin(y)", "cos(x) + cos(y)"
  },
  background = "bitmap",
  linecolor  = "black",
  linewidth  = 1/10,
  color      = "shade({1,1,0},{0,0,1})"
  cache      = true,
] x sized TextWidth ;
\stopMPcode

```

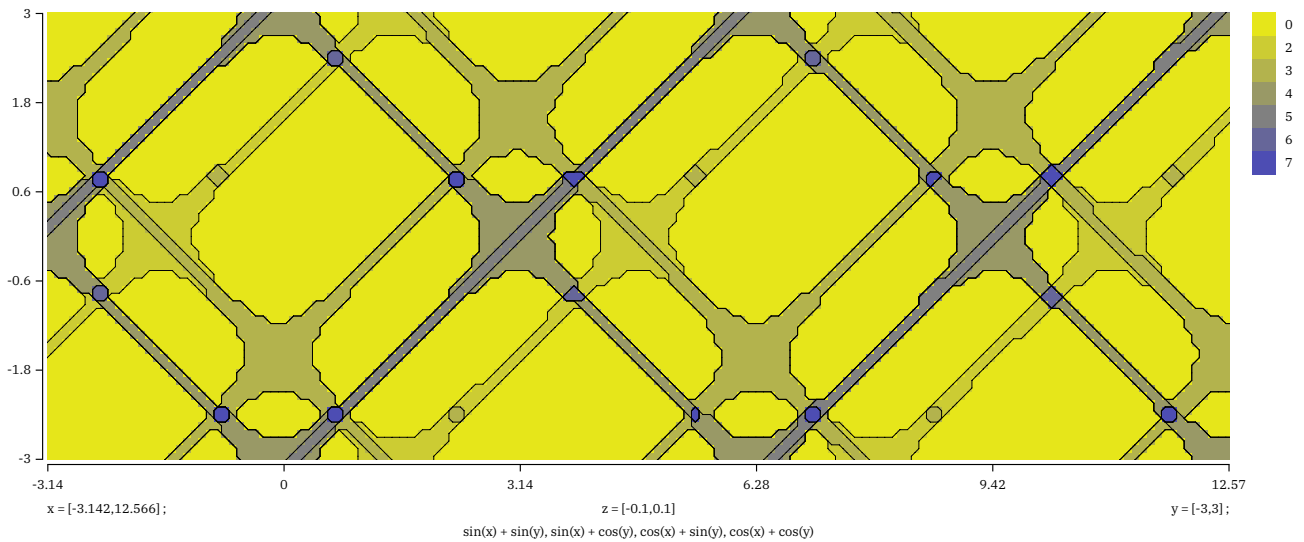


Figure 9.6

The range determines the z value(s) that we take into account. You can also pass a list of colors to be used. In figure 9.7 this is demonstrated. There we also show a variant foreground cell, which uses a bit different method for calculating the edges.³

```
\startMPcode{doublefun}
  draw lmt_contour [
    xmin = -2*pi, xmax = 2*pi, xstep = .01,
    ymin = -3,    ymax = 3,    ystep = .01,

    range      = { -.1, .1 },
    preamble   = "local sin, cos = math.sin, math.cos",
    functions  = { "sin(x) + sin(y)", "sin(x) + cos(y)" },
    background = "bitmap",
    foreground  = "cell",
    linecolor  = "white",
    linewidth  = 1/10,
    colors     = { (1/2,1/2,1/2), red, green, blue },
    level      = 3,
    linewidth  = 6,
    cache      = true,
  ] xsized TextWidth ;
\stopMPcode
```

Here the number of levels depends on the number of functions as each can overlap with another; for instance the outcome of two functions can overlap or not which means 3 cases, and with a value not being seen that gives 4 different cases.

```
\startMPcode{doublefun}
  draw lmt_contour [
    xmin = -2*pi, xmax = 2*pi, xstep = .01,
    ymin = -3,    ymax = 3,    ystep = .01,
```

³ This a bit of a playground: more variants might show up in due time.

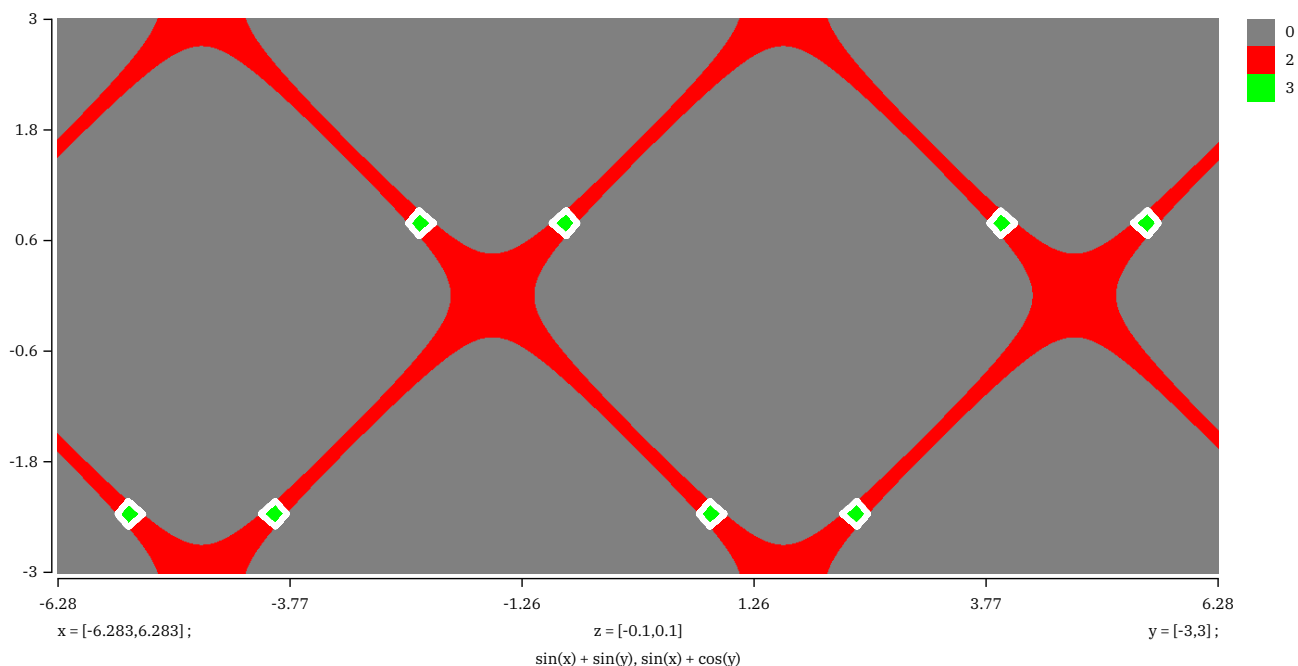


Figure 9.7

```

range      = { -.1, .1 },
preamble   = "local sin, cos = math.sin, math.cos",
functions  = {
    "sin(x) + sin(y)",
    "sin(x) + cos(y)",
    "cos(x) + sin(y)",
    "cos(x) + cos(y)"
},
background = "bitmap",
foreground  = "none",
level      = 3,
color      = "shade({2/3,0,0},{2/3,1,2/3})"
cache      = true,
] xsize TextWidth ;

```

\stopMPcode

Of course one can wonder how useful showing many functions but it can give nice pictures, as shown in figure 9.8.

```

\startMPcode{doublefun}
draw lmt_contour [
    xmin = -2*pi, xmax = 2*pi, xstep = .01,
    ymin = -3,    ymax = 3,    ystep = .01,

    range      = { -.3, .3 },
    preamble   = "local sin, cos = math.sin, math.cos",
    functions  = {
        "sin(x) + sin(y)",
        "sin(x) + cos(y)",
        "cos(x) + sin(y)",

```

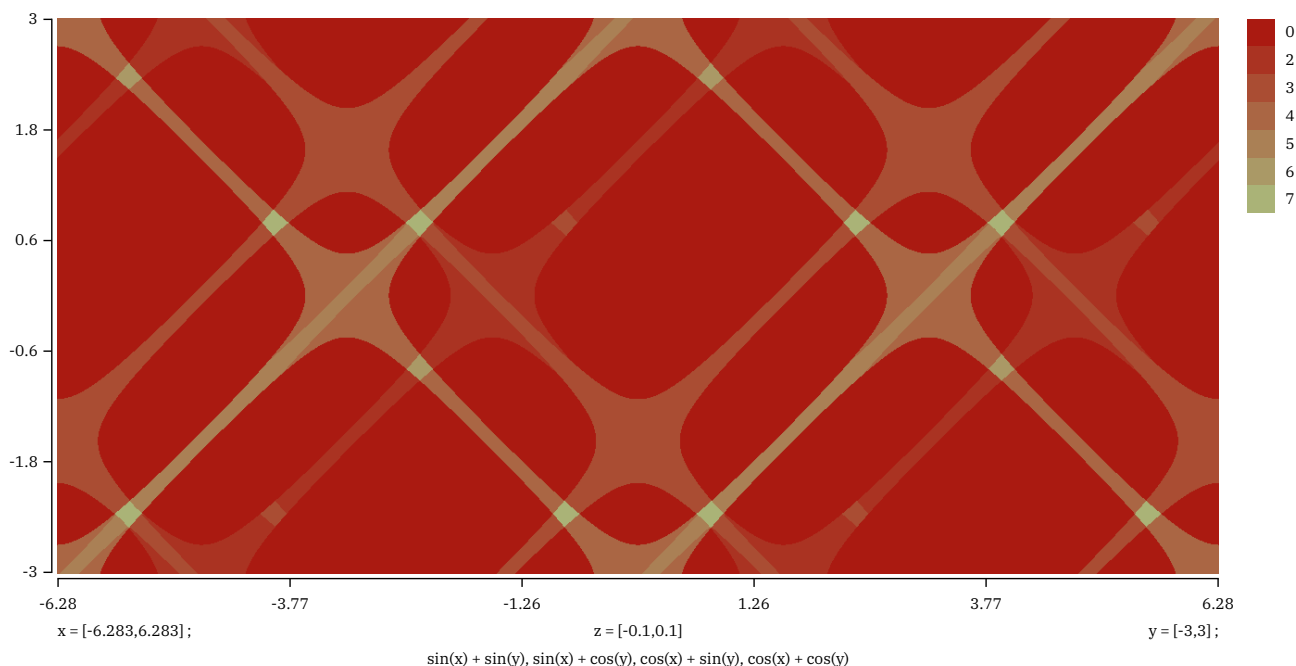


Figure 9.8

```

    "cos(x) + cos(y)"
},
background = "bitmap",
foreground = "none",
level      = 3,
color      = "shade({1,0,0},{0,1,0})"
cache      = true,
] x sized TextWidth ;

```

\stopMPcode

We can enlarge the window, which is demonstrated in figure 9.9. I suppose that such images only make sense in educational settings.

In figure 9.10 we see different combinations of backgrounds (in color) and foregrounds (edges) in action.

```

\startMPcode{doublefun}
draw lmt_contour [
    xmin = 0, xmax = 4*pi, xstep = 0,
    ymin = -6, ymax = 6, ystep = 0,

    levels = 5, legend = false, linewidth = 1/2,

    preamble = "local sin, cos = math.sin, math.cos",
    function = "cos(x) - sin(y)",
    color = "shade({1/2,0,0},{0,0,1/2})",

    background = "bitmap", foreground = "cell",
] x sized .3TextWidth ;

```

\stopMPcode

There are quite some settings. Some deal with the background, some with the foreground and quite some deal with the legend.


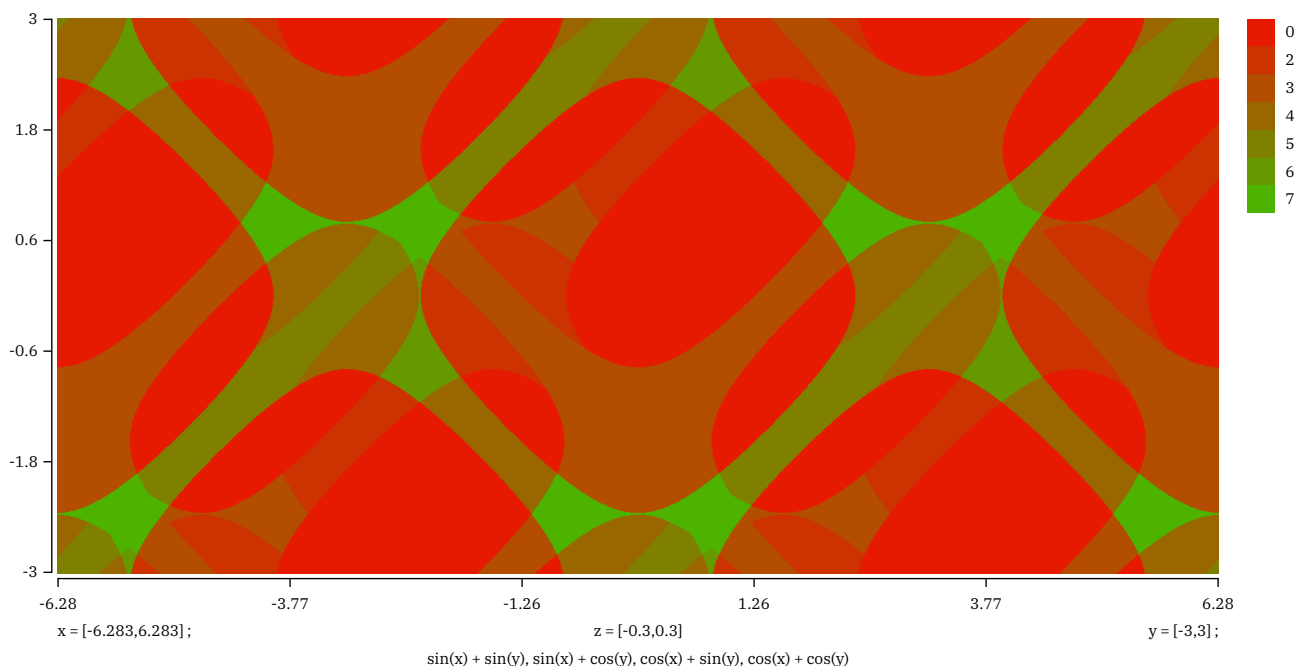



Figure 9.9

name	type	default	comment
xmin	numeric	0	needs to be set
xmax	numeric	0	needs to be set
ymin	numeric	0	needs to be set
ymax	numeric	0	needs to be set
xstep	numeric	0	auto 1/200 when zero
ystep	numeric	0	auto 1/200 when zero
checkresult	boolean	false	checks for overflow and NaN
defaultnan	numeric	0	the value to be used when NaN
defaultinf	numeric	0	the value to be used when overflow
levels	numeric	10	number of different levels to show
level	numeric		only show this level (foreground)
preamble	string		shortcuts
function	string	x + y	the result z value
functions	list		multiple functions (overlapping levels)
color	string	lin(1)	the result color value for level l (1 or 3 values)
colors	numeric		used when set
background	string	bitmap	band, bitmap, shape
foreground	string	auto	cell, edge, shape auto
linewidth	numeric	.25	
linecolor	string	gray	
width	numeric	0	automatic when zero
height	numeric	0	automatic when zero
trace	boolean	false	
legend	string	all	x y z function range all
legendheight	numeric	LineHeight	


legendwidth	numeric	LineHeight	
legendgap	numeric	0	
legenddistance	numeric	EmWidth	
textdistance	numeric	2EmWidth/3	
functiondistance	numeric	ExHeight	
functionstyle	string		ConT _E Xt style name
xformat	string	@0.2N	number format template
yformat	string	@0.2N	number format template
zformat	string	@0.2N	number format template
xstyle	string		ConT _E Xt style name
ystyle	string		ConT _E Xt style name
zstyle	string		ConT _E Xt style name
axisdistance	numeric	ExHeight	
axislinewidth	numeric	.25	
axisoffset	numeric	ExHeight/4	
axiscolor	string	black	
ticklength	numeric	ExHeight	
xtick	numeric	5	
ytick	numeric	5	
xlabel	numeric	5	
ylabel	numeric	5	

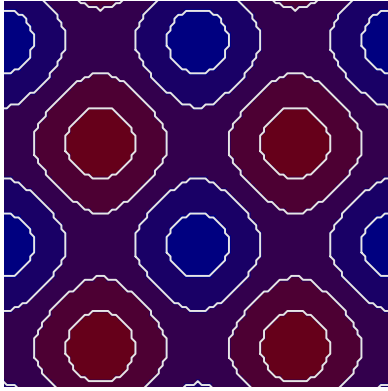


bitmap edge

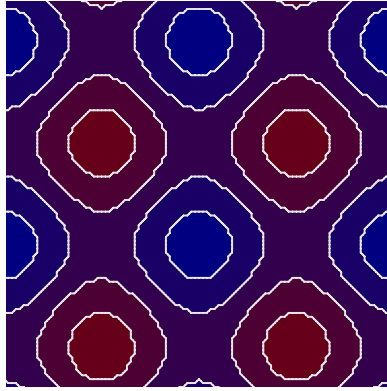


bitmap cell

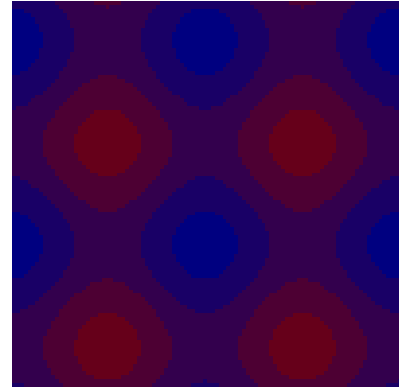


bitmap none

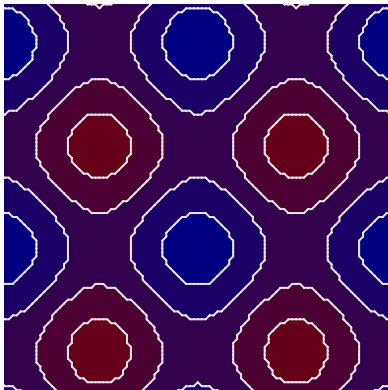


shape shape

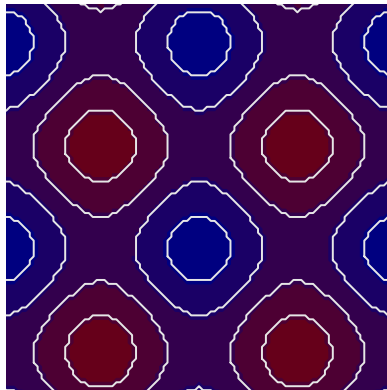


shape edge

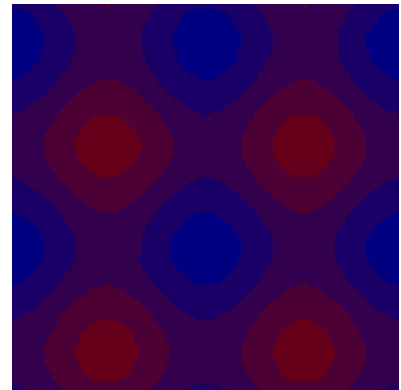


shape none

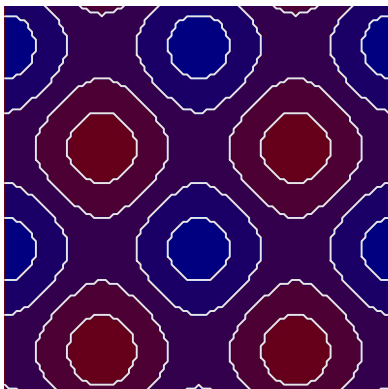

band edge

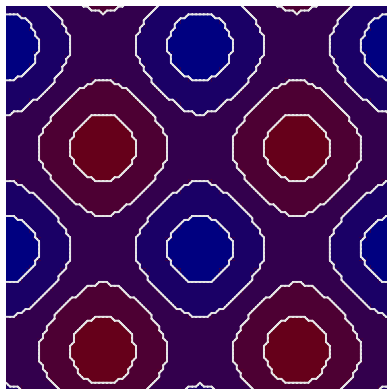

band cell

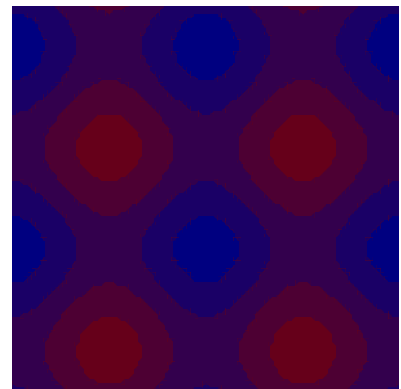

band none

Figure 9.10

10 Surface

This is work in progress so only some examples are shown here. Yet to be decided is how we deal with axis and such.

In figure 10.1 we see an example of a plot with axis as well as lines drawn.

```
\startMPcode{doublefun}  
  draw lmt_surface [  
    preamble = "local sin, cos = math.sin, math.cos",  
    code      = "sin(x*x) - cos(y*y)"  
    xmin      = -3,  
    xmax      = 3,  
    ymin      = -3,  
    ymax      = 3,  
    xvector    = { -0.3, -0.3 },  
    height     = 5cm,  
    axis       = { 40mm, 40mm, 30mm },  
    clipaxis   = true,  
    axiscolor  = "gray",  
  ] xsized .8TextWidth ;  
\stopMPcode
```

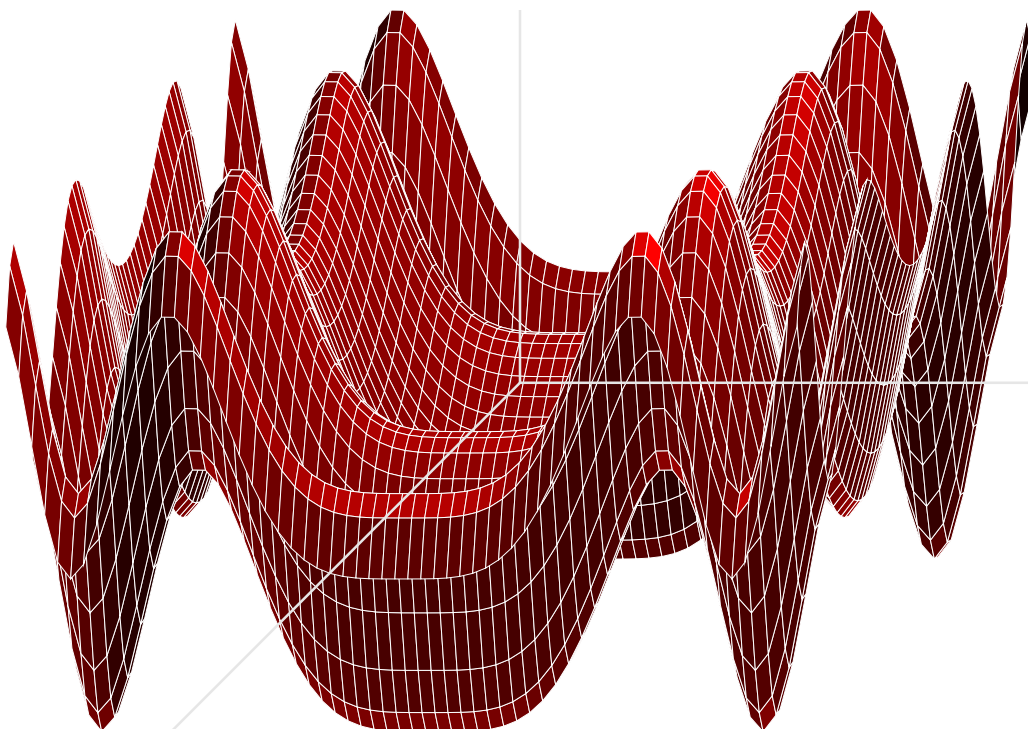


Figure 10.1

In figure 10.2 we don't draw the axis and lines. We also use a high resolution.

```
\startMPcode{doublefun}  
  draw lmt_surface [  
    preamble = "local sin, cos = math.sin, math.cos",  
    code      = "sin(x*x) - cos(y*y)"  
    xmin      = -3,  
    xmax      = 3,  
    ymin      = -3,  
    ymax      = 3,  
    xvector    = { -0.3, -0.3 },  
    height     = 5cm,  
    clipaxis   = true,  
    axiscolor  = "gray",  
  ] xsized .8TextWidth ;  
\stopMPcode
```

```

preamble = "local sin, cos = math.sin, math.cos",
code      = "sin(x*x) - cos(y*y)"
color     = "f, f/2, 1-f"
color     = "f, f, 0"
xstep     = .02,
ystep     = .02,
xvector   = { -0.4, -0.4 },
height    = 5cm,
lines     = false,
] x sized .8TextWidth ;
\stopMPcode

```

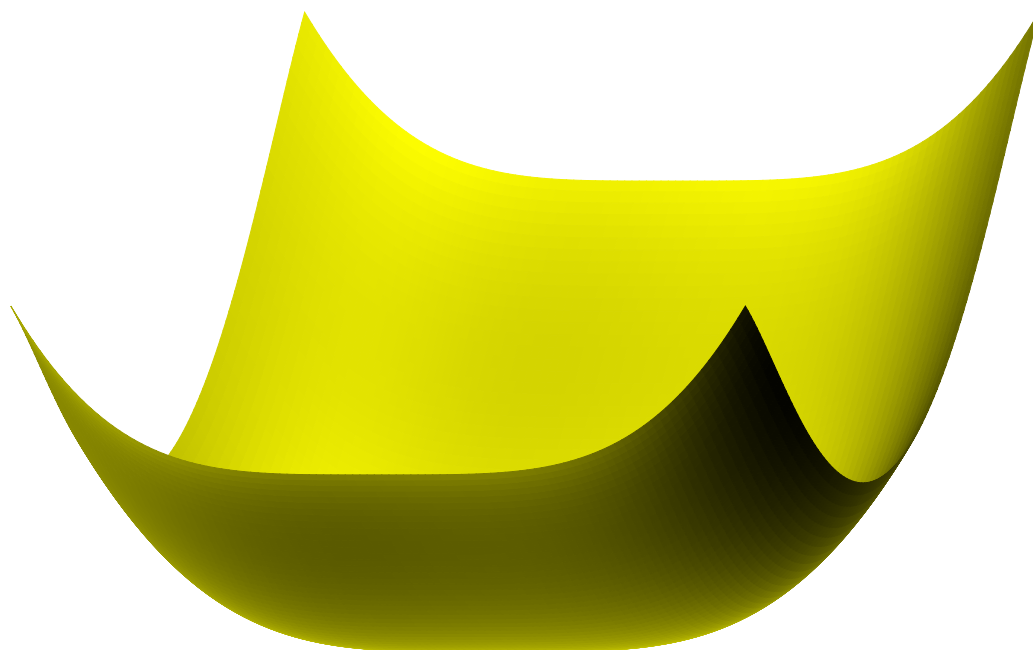


Figure 10.2

The preliminary set of parameters is:

name	type	default	comment
code	string		color string "f, 0, 0"
linecolor	numeric	1	gray scale
xmin	numeric	-1	
xmax	numeric	1	
ymin	numeric	-1	
ymax	numeric	1	
xstep	numeric	.1	
ystep	numeric	.1	
snap	numeric	.01	
xvector	list	{ -0.7, -0.7 }	
yvector	list	{ 1, 0 }	
zvector	list	{ 0, 1 }	
light	list	{ 3, 3, 10 }	
bright	numeric	100	
clip	boolean	false	

lines	boolean	true
axis	list	{ }
clipaxis	boolean	false
axiscolor	string	"gray"
axislinewidth	numeric	1/2

11 Mesh

This is more a gimmick than of real practical use. A mesh is a set of paths that gets transformed into hyperlinks. So, as a start you need to enable these:

`\setupinteraction`

```
[state=start,  
color=white,  
contrastcolor=white]
```

We just give a bunch of examples of meshes. A path is divided in smaller paths and each of them is part of the same hyperlink. An application is for instance clickable maps but (so far) only Acrobat supports such paths.

`\startuseMPgraphic{MyPath1}`

```
fill OverlayBox withcolor "darkyellow" ;  
save p ; path p[] ;  
p1 := unitssquare xysized( OverlayWidth/4, OverlayHeight/4) ;  
p2 := unitssquare xysized(2OverlayWidth/4,3OverlayHeight/5) shifted (  
OverlayWidth/4,0) ;  
p3 := unitssquare xysized( OverlayWidth/4, OverlayHeight ) shifted (3  
OverlayWidth/4,0) ;  
fill p1 withcolor "darkred" ;  
fill p2 withcolor "darkblue" ;  
fill p3 withcolor "darkgreen" ;  
draw lmt_mesh [ paths = { p1, p2, p3 } ] ;  
setbounds currentpicture to OverlayBox ;
```

`\stopuseMPgraphic`

Such a definition is used as follows. First we define the mesh as overlay:

`\defineoverlay[MyPath1][\useMPgraphic{MyPath1}]`

Then, later on, this overlay can be used as background for a button. Here we just jump to another page. The rendering is shown in figure 11.1.

`\button`

```
[height=3cm,  
width=4cm,  
background=MyPath1,  
frame=off]  
{Example 1}  
[realpage(2)]
```

More interesting are non-rectangular shapes so we show a bunch of them. You can pass multiple paths, influence the accuracy by setting the number of steps and show the mesh with the tracing option.

`\startuseMPgraphic{MyPath2}`

```
save q ; path q ; q := unitcircle xysized(OverlayWidth,OverlayHeight) ;  
save p ; path p ; p := for i=1 upto length(q) :
```



Figure 11.1

```

        (center q) -- (point (i-1) of q) -- (point i of q) -- (center q) --
    endfor cycle ;
    fill q withcolor "darkgray" ;
    draw lmt_mesh [
        trace = true,
        paths = { p }
    ] withcolor "darkred" ;

    setbounds currentpicture to OverlayBox ;
\stopuseMPgraphic

\startuseMPgraphic{MyPath3}
    save q ; path q ; q := unitcircle xysized(OverlayWidth,OverlayHeight)
        randomized 3mm ;
    fill q withcolor "darkgray" ;
    draw lmt_mesh [
        trace = true,
        paths = { meshed(q,OverlayBox,.05) }
    ] withcolor "darkgreen" ;
    % draw OverlayMesh(q,.025) withcolor "darkgreen" ;
    setbounds currentpicture to OverlayBox ;
\stopuseMPgraphic

\startuseMPgraphic{MyPath4}
    save q ; path q ; q := unitcircle xysized(OverlayWidth,OverlayHeight)
        randomized 3mm ;
    fill q withcolor "darkgray" ;
    draw lmt_mesh [
        trace = true,
        auto = true,
        step = 0.0125,
        paths = { q }
    ] withcolor "darkyellow" ;
    setbounds currentpicture to OverlayBox ;
\stopuseMPgraphic

\startuseMPgraphic{MyPath5}
    save q ; path q ; q := unitdiamond xysized(OverlayWidth,OverlayHeight)
        randomized 2mm ;
    q := q shifted - center q shifted center OverlayBox ;
    fill q withcolor "darkgray" ;
    draw lmt_mesh [

```

```

        trace = true,
        auto   = true,
        step   = 0.0125,
        paths  = { q }
    ] withcolor "darkmagenta" ;
    setbounds currentpicture to OverlayBox ;
\stopuseMPgraphic

\startuseMPgraphic{MyPath6}
    save p ; path p[] ;
    p1 := p2 := fullcircle xysized(2OverlayWidth/5,2OverlayHeight/3) ;
    p1 := p1 shifted - center p1 shifted center OverlayBox shifted (-1
        OverlayWidth/4,0) ;
    p2 := p2 shifted - center p2 shifted center OverlayBox shifted ( 1
        OverlayWidth/4,0) ;
    fill p1 withcolor "middlegray" ;
    fill p2 withcolor "middlegray" ;
    draw lmt_mesh [
        trace = true,
        auto   = true,
        step   = 0.02,
        paths  = { p1, p2 }
    ] withcolor "darkcyan" ;
    setbounds currentpicture to OverlayBox ;
\stopuseMPgraphic

\startuseMPgraphic{MyPath7}
    save p ; path p[] ;
    p1 := p2 := fullcircle xysized(2OverlayWidth/5,2OverlayHeight/3) rotated 45
        ;
    p1 := p1 shifted - center p1 shifted center OverlayBox shifted (-1
        OverlayWidth/4,0) ;
    p2 := p2 shifted - center p2 shifted center OverlayBox shifted ( 1
        OverlayWidth/4,0) ;
    fill p1 withcolor "middlegray" ;
    fill p2 withcolor "middlegray" ;
    draw lmt_mesh [
        trace = true,
        auto   = true,
        step   = 0.01,
        box    = OverlayBox enlarged -5mm,
        paths  = { p1, p2 }
    ] withcolor "darkcyan" ;
    draw OverlayBox enlarged -5mm withcolor "darkgray" ;
    setbounds currentpicture to OverlayBox ;
\stopuseMPgraphic

```

This is typical a feature that, if used at all, needs some experimenting but at least the traced images look interesting enough. The six examples are shown in figure 11.2.

MyPart3

MyPart5

MyPart7

Figure 11.2

12 Function

It is tempting to make helpers that can do a lot. However, that also means that we need to explain a lot. Instead it makes more sense to have specific helpers and just make another one when needed. Rendering functions falls into this category. At some point users will come up with specific cases that other users can use. Therefore, the solution presented here is not the ultimate answer. We start with a simple example:

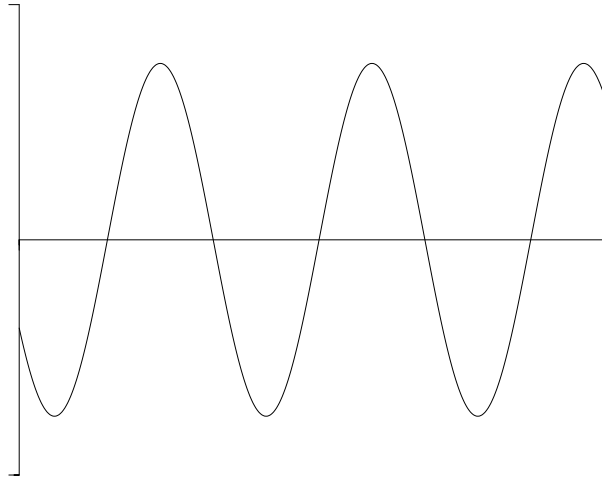


Figure 12.1

This image is defined as follows:

```
\startMPcode{doublefun}
  draw lmt_function [
    xmin = 0, xmax = 20, xstep = .1,
    ymin = -2, ymax = 2,

    sx = 1mm, xsmall = 80, xlarge = 20,
    sy = 4mm, ysmall = 40, ylarge = 4,

    linewidth = .025mm, offset = .1mm,

    code = "1.5 * math.sind (50 * x - 150)",
  ]
  xsize 8cm
;
\stopMPcode
```

We can draw multiple functions in one go. The next sample split the drawing over a few ranges and is defined as follows; in figure 12.2 we see the result.

```
\startMPcode{doublefun}
  draw lmt_function [
    xmin = 0, xmax = 20, xstep = .1,
    ymin = -2, ymax = 2,

    sx = 1mm, xsmall = 80, xlarge = 20,
    sy = 4mm, ysmall = 40, ylarge = 4,
```



```

linewidth = .025mm, offset = .1mm,

xticks    = "bottom",
yticks    = "left",
xlabel    = "nolimits",
ylabel    = "yes",
code      = "1.5 * math.sind (50 * x - 150)",
% frame    = "ticks",
frame     = "sticks",
ycaption  = "\strut \rotate[rotation=90]{something vertical, using
    $\sin{x}$}",
xcaption  = "\strut something horizontal",
functions = {
    [ xmin = 1.0, xmax = 7.0, close = true, fillcolor = "darkred" ],
    [ xmin = 7.0, xmax = 12.0, close = true, fillcolor = "darkgreen" ],
    [ xmin = 12.0, xmax = 19.0, close = true, fillcolor = "darkblue" ],
    [
        drawcolor = "darkyellow",
        drawsize  = 2
    ]
}
]
    xsize TextWidth
;

```

\stopMPcode

Instead of the same function, we can draw different ones and when we use transparency we get nice results too.

```

\definecolor[MyColorR][r=.5,t=.5,a=1]
\definecolor[MyColorG][g=.5,t=.5,a=1]
\definecolor[MyColorB][b=.5,t=.5,a=1]

\startMPcode{doublefun}
draw lmt_function [
    xmin = 0, xmax = 20, xstep = .1,
    ymin = -1, ymax = 1,

    sx = 1mm, xsmall = 80, xlarge = 20,
    sy = 4mm, ysmall = 40, ylarge = 4,

    linewidth = .025mm, offset = .1mm,

    functions = {
        [
            code      = "math.sind (50 * x - 150)",
            close     = true,
            fillcolor  = "MyColorR"
        ],
        [
            code      = "math.cosd (50 * x - 150)",

```

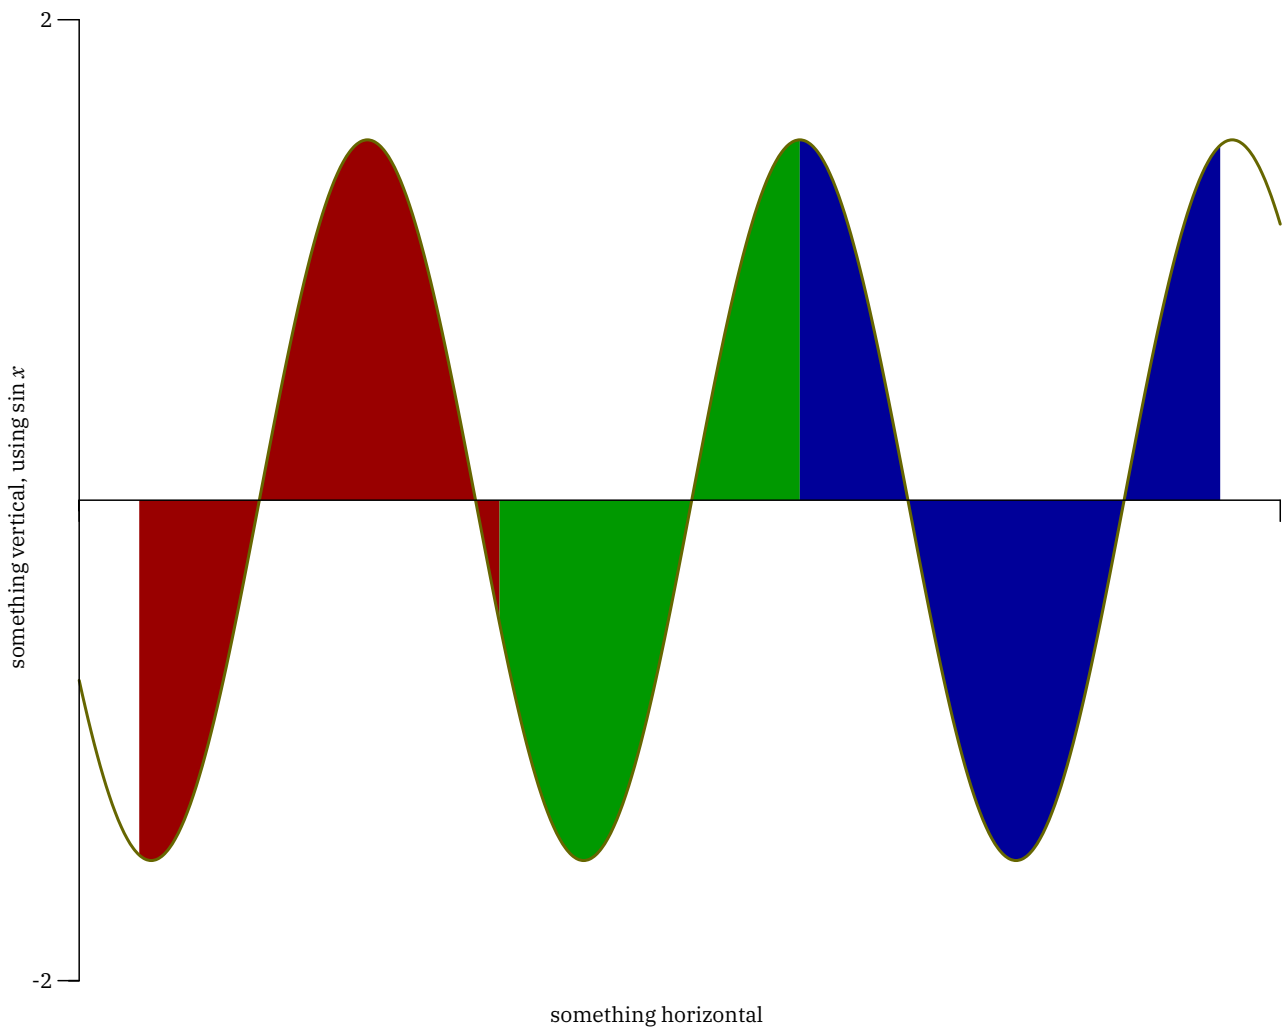


Figure 12.2

```

        close      = true,
        fillcolor = "MyColorB"
    ],
    },
]
    xsize TextWidth
;
\stopMPcode

```

It is important to choose a good step. In figure 12.4 we show 4 variants and it is clear that in this case using straight line segments is better (or at least more efficient with small steps).

```

\startMPcode{doublefun}
draw lmt_function [
    xmin = 0, xmax = 10, xstep = .1,
    ymin = -1, ymax = 1,

    sx = 1mm, sy = 4mm,

    linewidth = .025mm, offset = .1mm,

```

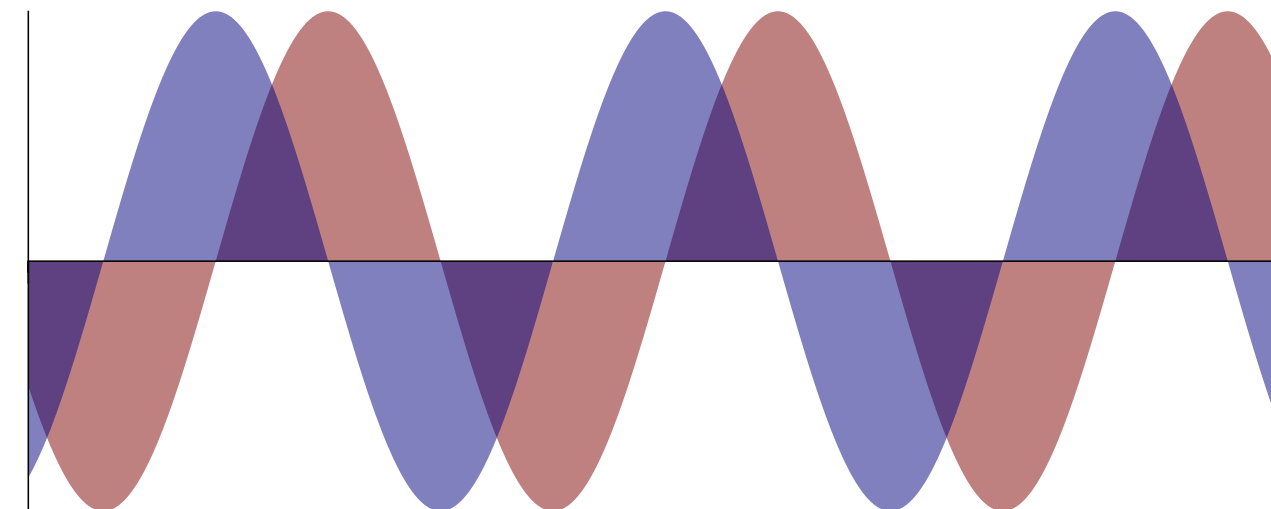


Figure 12.3

```

code = "math.sind (50 * x^2 - 150)",
shape = "curve"
]
xsize .45TextWidth
;
\stopMPcode

```

You can manipulate the axis (a bit) by tweaking the first and last ticks. In the case of figure 12.5 we also put the shape on top of the axis.

```

\startMPcode{doublefun}
draw lmt_function [
xfirst = 9, xlast = 21, ylarge = 2, ysmall = 1/5,
yfirst = -1, ylast = 1, xlarge = 2, xsmall = 1/4,

xmin = 10, xmax = 20, xstep = .25,
ymin = -1, ymax = 1,

drawcolor = "darkmagenta",
shape = "steps",
code = "0.5 * math.random(-2,2)",
linewidth = .025mm,
offset = .1mm,
reverse = true,
]
xsize TextWidth
;
\stopMPcode

```

The whole repertoire of parameters (in case of doubt just check the source code as this kind of code is not that hard to follow) is:

name	type	default	comment
sx	numeric	1mm	horizontal scale factor

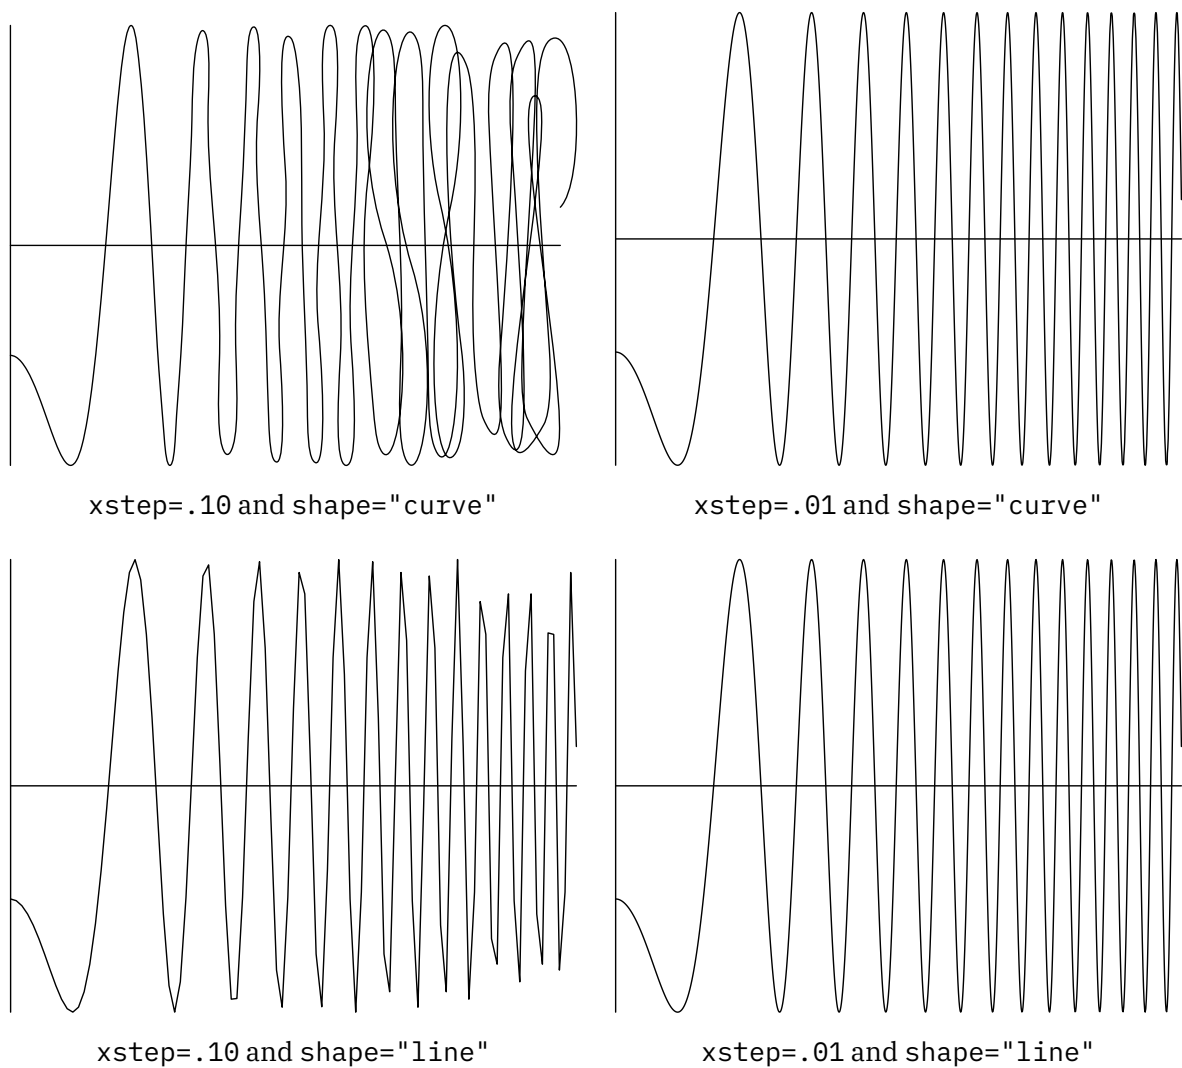


Figure 12.4

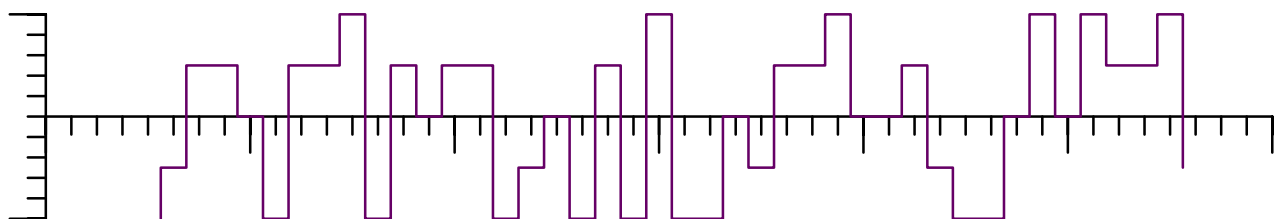


Figure 12.5

sy	numeric	1mm	vertical scale factor
offset	numeric	0	
xmin	numeric	1	
xmax	numeric	1	
xstep	numeric	1	
xsmall	numeric		optional step of small ticks
xlarge	numeric		optional step of large ticks
xlabel	string	no	yes, no or nolimits
xticks	string	bottom	possible locations are top, middle and bottom
xcaption	string		
ymin	numeric	1	

ymax	numeric	1	
ystep	numeric	1	
ysmall	numeric		optional step of small ticks
ylarge	numeric		optional step of large ticks
xfirst	numeric		left of xmin
xlast	numeric		right of xmax
yfirst	numeric		below ymin
ylast	numeric		above ymax
ylabels	string	no	yes, no or nolimits
yticks	string	left	possible locations are left, middle and right
ycaption	string		
code	string		
close	boolean	false	
shape	string	curve	or line
fillcolor	string		
drawsize	numeric	1	
drawcolor	string		
frame	string		options are yes, ticks and sticks
linewidth	numeric	.05mm	
pointsymbol	string		like type dots
pointsize	numeric	2	
pointcolor	string		
xarrow	string		
yarrow	string		
reverse	boolean	false	when true draw the function between axis and labels

13 Chart

This is another example implementation but it might be handy for simple cases of presenting results. Of course one can debate the usefulness of certain ways of presenting but here we avoid that discussion. Let's start with a simple pie chart (figure 13.1).

```
\startMPcode
draw lmt_chart_circle [
  samples      = { { 1, 4, 3, 2, 5, 7, 6 } },
  percentage   = true,
  trace        = true,
] ;
\stopMPcode
```

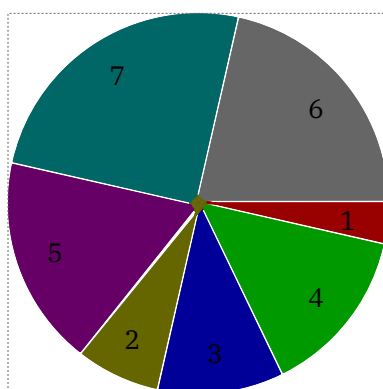


Figure 13.1

As with all these LMTX extensions, you're invited to play with the parameters. in figure 13.2 we see a variant that adds labels as well as one that has a legend.

The styling of labels and legends can be influenced independently.

```
\startMPcode
draw lmt_chart_circle [
  height       = 4cm,
  samples      = { { 1, 4, 3, 2, 5, 7, 6 } },
  percentage   = true,
  trace        = true,
  labelcolor   = "white",
  labelformat  = "@0.1f",
  labelstyle   = "ttxx"
] ;
\stopMPcode
```

```
\startMPcode
draw lmt_chart_circle [
  height       = 4cm,
  samples      = { { 1, 4, 3, 2, 5, 7, 6 } },
  percentage   = false,
  trace        = true,
```

```

linewidth   = .125mm,
originsize  = 0,
labeloffset = 3cm,
labelstyle  = "bfxx",
legendstyle = "tfxx",
legend      = {
    "first", "second", "third", "fourth",
    "fifth", "sixths", "sevenths"
}
] ;
\stopMPcode

```

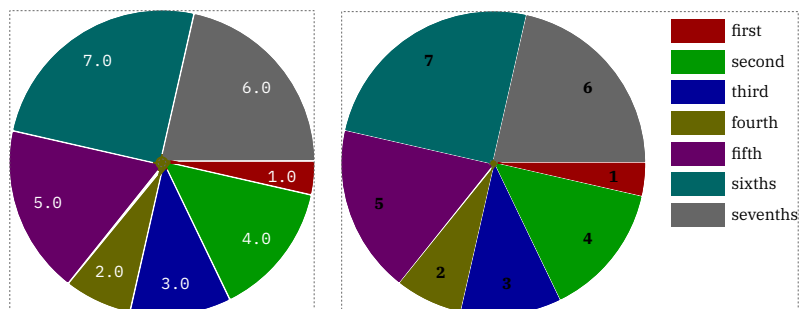


Figure 13.2

A second way of rendering are histograms, and the interface is mostly the same. In figure 13.3 we see two variants

```

\startMPcode
draw lmt_chart_histogram [
    samples      = { { 1, 4, 3, 2, 5, 7, 6 } },
    percentage   = true,
    cumulative   = true,
    trace        = true,
] ;
\stopMPcode

```

and one with two datasets:

```

\startMPcode
draw lmt_chart_histogram [
    samples      = {
        { 1, 4, 3, 2, 5, 7, 6 },
        { 1, 2, 3, 4, 5, 6, 7 }
    },
    background   = "lightgray",
    trace        = true,
] ;
\stopMPcode

```

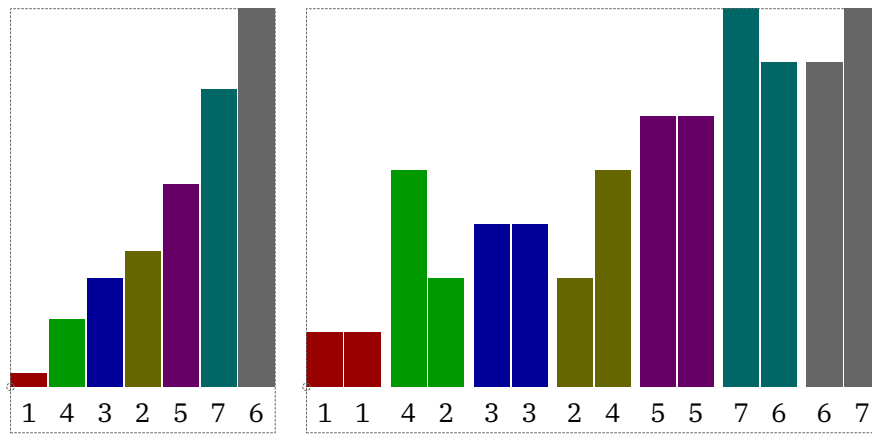


Figure 13.3

A cumulative variant is shown in figure 13.4 where we also add a background (color).

```
\startMPpage[offset=5mm]
  draw lmt_chart_histogram [
    samples      = {
      { 1, 4, 3, 2, 5, 7, 6 },
      { 1, 2, 3, 4, 5, 6, 7 }
    },
    percentage    = true,
    cumulative    = true,
    showlabels    = false,
    backgroundcolor = "lightgray",
  ] ;
\stopMPpage
```

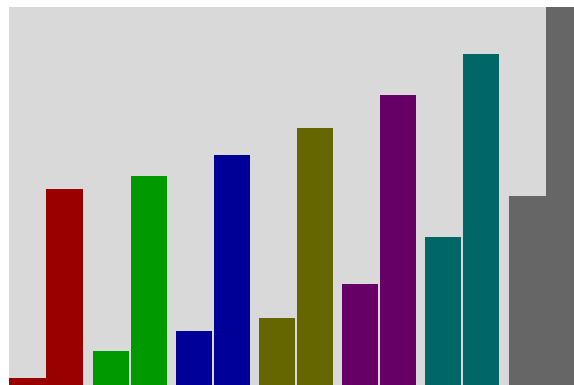


Figure 13.4

A different way of using colors is shown in figure 13.5 where each sample gets its own (same) color.

```
\startMPcode
  draw lmt_chart_histogram [
    samples      = {
      { 1, 4, 3, 2, 5, 7, 6 },
      { 1, 2, 3, 4, 5, 6, 7 }
    }
  ] ;
\stopMPcode
```



```

    },
    percentage = true,
    cumulative = true,
    showlabels = false,
    background = "lightgray",
    colormode = "local",
  ] ;
\stopMPcode

```

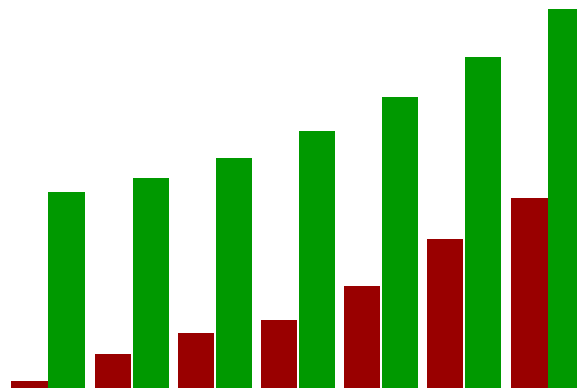


Figure 13.5

As with pie charts you can add labels and a legend:

```

\startMPcode
  draw lmt_chart_histogram [
    height      = 6cm,
    samples     = { { 1, 4, 3, 2, 5, 7, 6 } },
    percentage  = true,
    cumulative  = true,
    trace       = true,
    labelstyle  = "ttxx",
    labelanchor = "top",
    labelcolor  = "white",
    backgroundcolor = "middlegray",
  ] ;
\stopMPcode

```

The previous and next examples are shown in figure 13.6. The height specified here concerns the graphic and excludes the labels,

```

\startMPcode
  draw lmt_chart_histogram [
    height      = 6cm,
    width       = 10mm,
    samples     = { { 1, 4, 3, 2, 5, 7, 6 } },
    trace       = true,
    maximum     = 7.5,
    linewidth   = 1mm,
    originsize  = 0,
    labelanchor = "bot",
  ] ;
\stopMPcode

```

```

labelcolor = "black"
labelstyle = "bfxx"
legendstyle = "tfxx",
labelstrut = "yes",
legend = {
    "first", "second", "third", "fourth",
    "fifth", "sixths", "sevenths"
}
] ;
\stopMPcode

```

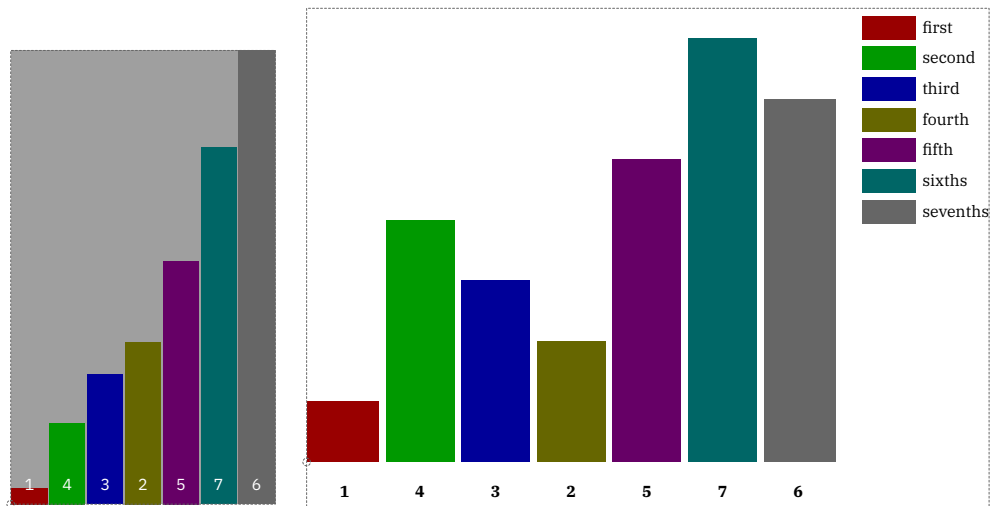


Figure 13.6

The third category concerns bar charts that run horizontal. Again we see similar options driving the rendering (figure 13.7).

```

\startMPcode
draw lmt_chart_bar [
    samples      = { { 1, 4, 3, 2, 5, 7, 6 } },
    percentage   = true,
    cumulative   = true,
    trace        = true,
] ;
\stopMPcode

\startMPcode
draw lmt_chart_bar [
    samples      = { { 1, 4, 3, 2, 5, 7, 6 } },
    percentage   = true,
    cumulative   = true,
    showlabels   = false,
    backgroundcolor = "lightgray",
] ;
\stopMPcode

```

Determining the offset of labels is manual work:

```

\startMPcode
draw lmt_chart_bar [
  width          = 4cm,
  height         = 5mm,
  samples        = { { 1, 4, 3, 2, 5, 7, 6 } },
  percentage     = true,
  cumulative     = true,
  trace          = true,
  labelcolor     = "white",
  labelstyle     = "ttxx",
  labelanchor    = "rt",
  labeloffset    = .25EmWidth,
  backgroundcolor = "middlegray",
] ;
\stopMPcode

```

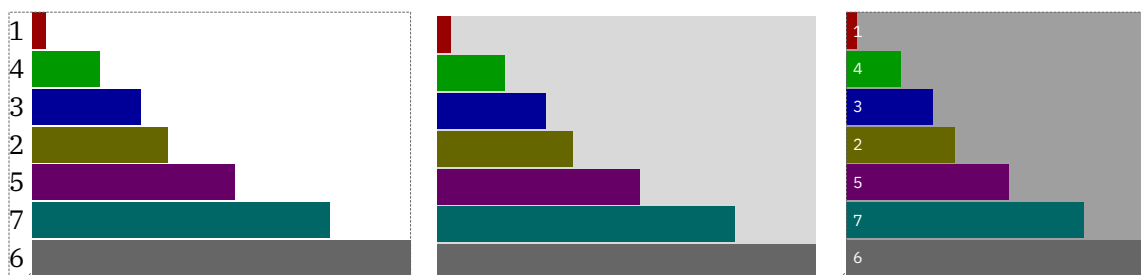


Figure 13.7

Here is one with a legend (rendered in figure 13.8):

```

\startMPcode
draw lmt_chart_bar [
  width          = 8cm,
  height         = 10mm,
  samples        = { { 1, 4, 3, 2, 5, 7, 6 } },
  trace          = true,
  maximum        = 7.5,
  linewidth      = 1mm,
  originsize     = 0,
  labelanchor    = "lft",
  labelcolor     = "black",
  labelstyle     = "bfxx",
  legendstyle    = "tfxx",
  labelstrut     = "yes",
  legend         = {
    "first", "second", "third", "fourth",
    "fifth", "sixths", "sevenths"
  }
] ;
\stopMPcode

```

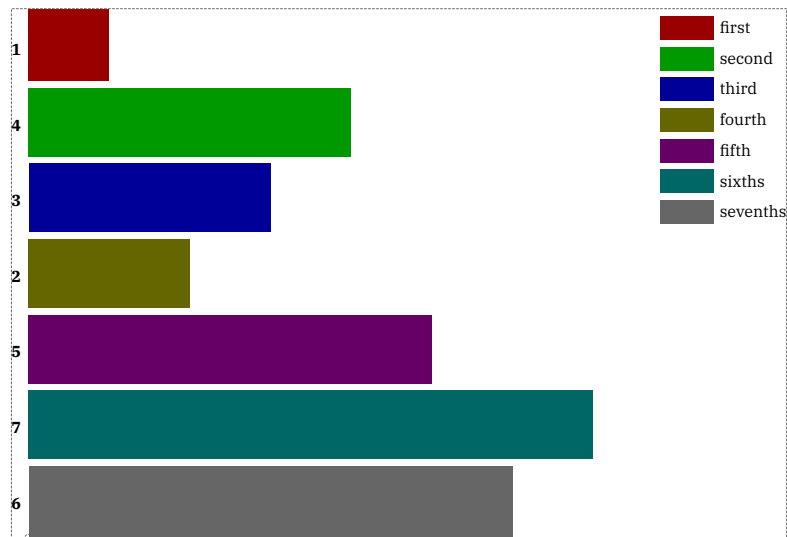


Figure 13.8

You can have labels per dataset as well as draw multiple datasets in one image, see figure 13.9:

\startMPcode

```
draw lmt_chart_bar [
  samples = {
    { 1, 4, 3, 2, 5, 7, 6 },
    { 3, 2, 5, 7, 5, 6, 1 }
  },
  labels = {
    { "a1", "b1", "c1", "d1", "e1", "f1", "g1" },
    { "a2", "b2", "c2", "d2", "e2", "f2", "g2" }
  },
  labeloffset = -EmWidth,
  labelanchor = "center",
  labelstyle = "ttxx",
  trace = true,
  center = true,
] ;
```

```
draw lmt_chart_bar [
  samples = {
    { 1, 4, 3, 2, 5, 7, 6 }
  },
  labels = {
    { "a", "b", "c", "d", "e", "f", "g" }
  },
  labeloffset = -EmWidth,
  labelanchor = "center",
  trace = true,
  center = true,
] shifted (10cm,0) ;
```

\stopMPcode

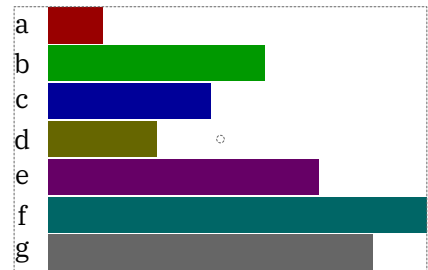
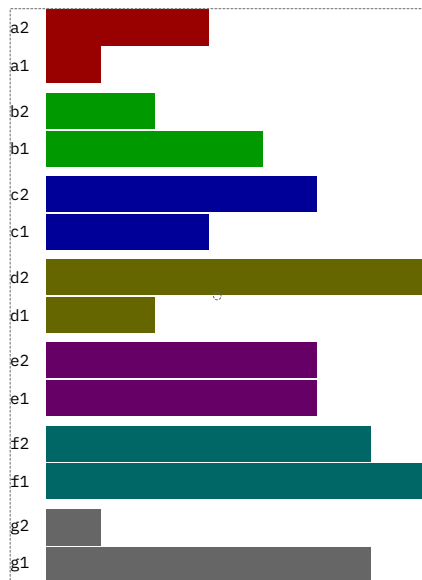


Figure 13.9

name	type	default	comment
originsize	numeric	1mm	
trace	boolean	false	
showlabels	boolean	true	
center	boolean	false	
samples	list		
	cumulative	boolean	false
percentage	boolean	false	
maximum	numeric	0	
distance	numeric	1mm	
labels	list		
labelstyle	string		
labelformat	string		
labelstrut	string	auto	
labelanchor	string		
labeloffset	numeric	0	
labelfraction	numeric	0.8	
labelcolor	string		
backgroundcolor	string		
drawcolor	string	white	
fillcolors	list		primary (dark) colors
colormode	string	global	or local
linewidth	numeric	.25mm	
legendcolor	string		
legendstyle	string		
legend	list		

Pie charts have:

name	default
------	---------

height	5cm
width	5mm
labelanchor	
labeloffset	0
labelstrut	no

Histograms come with:

name	default
height	5cm
width	5mm
labelanchor	bot
labeloffset	1mm
labelstrut	auto

Bar charts use:

name	default
height	5cm
width	5mm
labelanchor	lft
labeloffset	1mm
labelstrut	no

14 SVG

There is not that much to tell about this command. It translates an svg image to MetaPost operators. We took a few images from a mozilla emoji font:

```
\startMPcode
  draw lmt_svg [
    filename = "mozilla-svg-002.svg",
    height   = 2cm,
    width    = 8cm,
  ] ;
\stopMPcode
```



Because we get pictures, you can mess around with them:

```
\startMPcode
  picture p ; p := lmt_svg [ filename = "mozilla-svg-001.svg" ] ;
  numeric w ; w := bbwidth(p) ;
  draw p ;
  draw p xscaled -1 shifted (2.5*w,0) ;
  draw p rotatedaround(center p,45) shifted (3.0*w,0) ;
  draw image (
    for i within p : if filled i :
      draw pathpart i withcolor green ;
    fi endfor ;
  ) shifted (4.5*w,0) ;
  draw image (
    for i within p : if filled i :
      fill pathpart i withcolor red withtransparency (1,.25) ;
    fi endfor ;
  ) shifted (6*w,0) ;
\stopMPcode
```



Of course. often you won't know in advance what is inside the image and how (well) it has been defined so the previous example is more about showing some MetaPost muscle.

The supported parameters are:

name	type	default	comment
filename	path		
width	numeric		
height	numeric		

15 Poisson

When, after a post on the ConT_EXt mailing list, Aditya pointed me to an article on mazes I ended up at poisson distributions which to me looks nicer than what I normally do, fill a grid and then randomize the resulting positions. With some hooks this can be used for interesting patterns too. The algorithm is based on the discussion at:


<http://devmag.org.za/2009/05/03/poisson-disk-sampling>

Other websites mention some variants on that but I saw no reason to look into those in detail. I can imagine more random related variants in this domain so consider this an appetizer. The user is rather simple because some macro is assumed to deal with the rendering of the distributed points. We just show some examples (because the interface might evolve).

\startMPcode

```
draw lmt_poisson [
  width      = 40,
  height     = 40,
  distance   = 1,
  count      = 20,
  macro      = "draw"
] xsize 4cm ;
```

\stopMPcode




\startMPcode

```
vardef tst (expr x, y, i, n) =
  fill fullcircle scaled (10+10*(i/n)) shifted (10x,10y)
  withcolor "darkblue" withtransparency (1,.5) ;
enddef ;


draw lmt_poisson [
  width      = 50,
  height     = 50,
  distance   = 1,
  count      = 20,
  macro      = "tst",
  arguments  = 4
] xsize 6cm ;
```

\stopMPcode

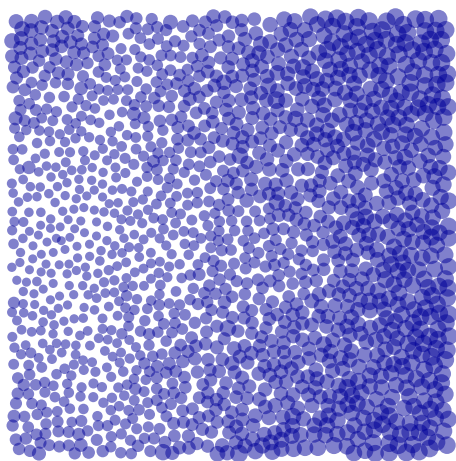

```
\startMPcode
  vardef tst (expr x, y, i, n) =
    fill fulldiamond scaled (5+5*(i/n)) randomized 2 shifted (10x,10y)
      withcolor "darkgreen" ;
  enddef ;

  draw lmt_poisson [
    width      = 50,
    height     = 50,
    distance   = 1,
    count      = 20,
    macro      = "tst",
    initialx   = 10,
    initialy   = 10,
    arguments  = 4
  ] xsize 6cm ;
\stopMPcode
```

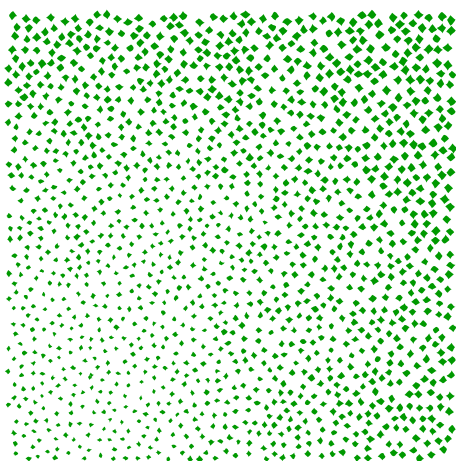


```
\startMPcode{doublefun}
  vardef tst (expr x, y, i, n) =
    fill fulldiamond randomized (.2*i/n) shifted (x,y);
  enddef ;

  draw lmt_poisson [
```

```

width      = 150,
height     = 150,
distance   = 1,
count      = 20,
macro      = "tst",
arguments  = 4
] xsize 6cm withcolor "darkmagenta" ;
\stopMPcode


```

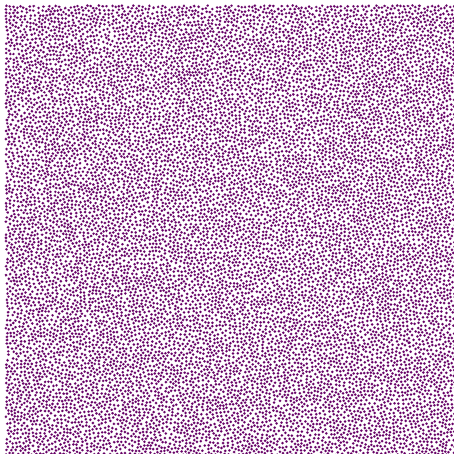

```

\startMPcode
vardef tst (expr x, y, i, n) =
  draw externalfigure "cow.pdf" ysize (10+5*i/n) shifted (10x,10y);
enddef ;
draw lmt_poisson [
  width      = 20,
  height     = 20,
  distance   = 1,
  count      = 20,
  macro      = "tst"
  arguments  = 4,
] xsize 6cm ;
\stopMPcode

```

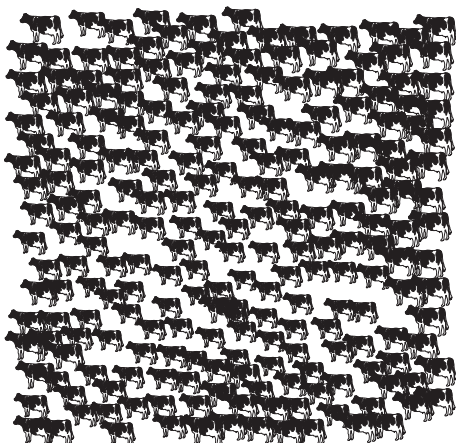

The supported parameters are:

name	type	default	comment
width	numeric	50	
height	numeric	50	
distance	numeric	1	
count	numeric	20	
macro	string	"draw"	
initialx	numeric	10	
initialy	numeric	10	
arguments	numeric	4	

16 Fonts

Fonts are interesting phenomena but can also be quite hairy. Shapes can be missing or not to your liking. There can be bugs too. Control over fonts has always been on the agenda of \TeX macro packages, and $\text{Con}\text{\TeX}$ t provides a lot of control, especially in MkIV. In LMTX we add some more to that: we bring back MetaFont's but now in the MetaPost way. A simple example shows how this is (maybe I should say: will be) done.

We define three simple shapes and do that (for now) in the `simplefun` instance because that's what is used when generating the glyphs.

```
\startMPcalculation{simplefun}
  vardef TestGlyphLB =
    image (
      fill (unitsquare xscaled 10 yscaled 16 shifted (0,-3))
        withcolor "darkred" withtransparency (1,.5)
    );
  enddef ;

  vardef TestGlyphRB =
    image (
      fill (unitcircle xscaled 15 yscaled 12 shifted (0,-2))
        withcolor "darkblue" withtransparency (1,.5)
    );
  enddef ;

  vardef TestGlyphFS =
    image (
      fill (unittriangle xscaled 15 yscaled 12 shifted (0,-2))
        withcolor "darkgreen" withtransparency (1,.5)
    );
  enddef ;
\stopMPcalculation
```

This is not that spectacular, not is the following:

```
\startMPcalculation{simplefun}
  lmt_registerglyphs [
    name = "test",
    units = 10, % 1000
  ] ;

  lmt_registerglyph [
    category = "test",
    unicode = 123,
    code = "draw TestGlyphLB ;",
```

```

width    = 10, % 1000
height   = 13, % 1300
depth    = 3   % 300
] ;

lmt_registerglyph [
  category = "test",
  unicode  = 125,
  code     = "draw TestGlyphRB ;",
  width    = 15,
  height   = 10,
  depth    = 2
] ;

lmt_registerglyph [
  category = "test",
  unicode  = "/",
  code     = "draw TestGlyphFS ;",
  width    = 15,
  height   = 10,
  depth    = 2
] ;

```

\stopMPcalculation

We now define a font. We always use a font as starting point which has the advantage that we always get something reasonable when we test. Of course you can use this mps font feature with other fonts too.

```

\definefontfeature[metapost][metapost=test] % or: mps={category=test}

\definefont[MyFontA][Serif*metapost @ 10bp]
\definefont[MyFontB][Serif*metapost @ 12bp]

```


These fonts can now be used:

```

\MyFontA \dorecuse{20}{\{ /#1/ \} }\par
\MyFontB \dorecuse{20}{\{ /#1/ \} }\par

```

We get some useless text but it demonstrates the idea:

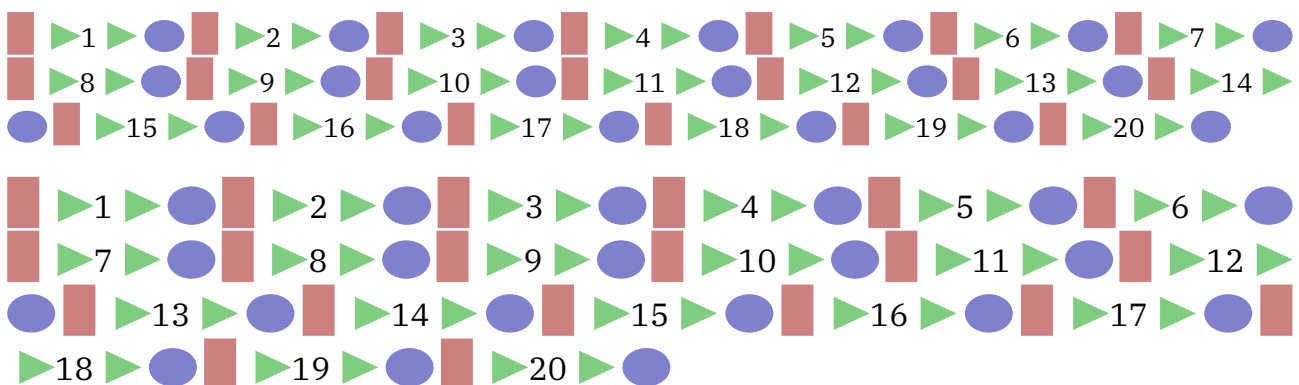

If you know a bit more about ConT_EXt you could think: so what, wasn't this already possible? Sure, there are various ways to achieve similar effects, but the method described here has a few advantages: it's relatively easy and we're talking about real fonts here. This means that using the shapes for characters is pretty efficient.

A more realistic example is given next. It is a subset of what is available in the ConT_EXt core.

```
\startMPcalculation{simplefun}

  pen SymbolPen ; SymbolPen := pencircle scaled 1/4 ;

  vardef SymbolBullet =
    fill unitcircle scaled 3 shifted (1.5,1.5) withpen SymbolPen
  enddef ;
  vardef SymbolSquare =
    draw unitsquare scaled (3-1/16) shifted (1.5,1.5) withpen SymbolPen
  enddef ;
  vardef SymbolBlackDiamond =
    fillup unitdiamond scaled (3-1/16) shifted (1.5,1.5) withpen SymbolPen
  enddef ;
  vardef SymbolNotDef =
    draw center unitcircle
      scaled 3
      shifted (1.5,1.5)
      withpen SymbolPen scaled 4
  enddef ;

  lmt_registerglyphs [
    name      = "symbols",
    units     = 10,
    usecolor  = true,
    width     = 6,
    height    = 6,
    depth     = 0,
    code      = "SymbolNotDef ;",
  ] ;

  lmt_registerglyph [ category = "symbols", unicode = "0x2022",
    code = "SymbolBullet ;"
  ] ;
  lmt_registerglyph [ category = "symbols", unicode = "0x25A1",
    code = "SymbolSquare ;"
  ] ;
  lmt_registerglyph [ category = "symbols", unicode = "0x25C6",
    code = "SymbolBlackDiamond ;"
  ] ;
\stopMPcalculation
```

We could use these symbols in for instance itemize symbols. You might notice the potential difference in bullets:

```

\definefontfeature[metapost][metapost=symbols]


\definefont[MyFont] [Serif*metapost sa 1]

\startitemize[packed]
  \startitem {\MyFont
  \startitem {\MyFont\red
  \stopitem
  \startitem {\MyFont\blue\showglyphs
  shown. \stopitem
\stopitemize

```

- ◻ • Regular rendering.
- ◻ • Rendering with color.
- ◻ ◻ Idem but with boundingboxes shown.

When blown up, these symbols look as follows:

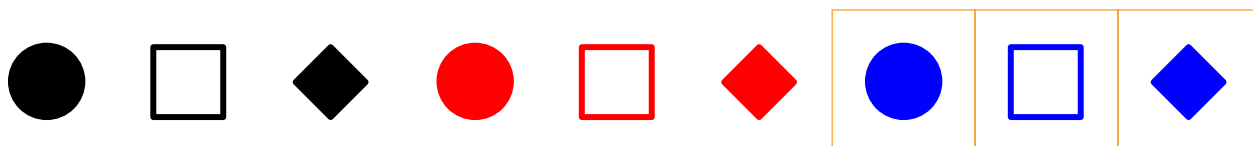

You can use these tricks with basically any font, so also with math fonts. However, at least for now, you need to define these before the font gets loaded.

```

\startMPcalculation{simplefun}

  pen KindergartenPen ; KindergartenPen := pencircle scaled 1 ;

  % 10 x 10 grid

  vardef KindergartenEqual =
    draw image
    (
      draw (2,6) -- (9,5) ;
      draw (2,4) -- (8,3) ;
    )
    shifted (0,-2)
    withpen KindergartenPen
    withcolor "KindergartenEqual"
  enddef ;
  vardef KindergartenPlus =
    draw image
    (
      draw (1,4) -- (9,5) ;
      draw (4,1) -- (5,8) ;
    )
    shifted (0,-2)
    withpen KindergartenPen
    withcolor "KindergartenPlus"

```



```

enddef ;
vardef KindergartenMinus =
    draw image
    (
        draw (1,5) -- (9,4) ;
    )
    shifted (0,-2)
    withpen KindergartenPen
    withcolor "KindergartenMinus"
enddef ;
vardef KindergartenTimes =
    draw image
    (
        draw (2,1) -- (9,8) ;
        draw (8,1) -- (2,8) ;
    )
    shifted (0,-2)
    withpen KindergartenPen
    withcolor "KindergartenTimes"
enddef ;
vardef KindergartenDivided =
    draw image
    (
        draw (2,1) -- (8,9) ;
    )
    shifted (0,-2)
    withpen KindergartenPen
    withcolor "KindergartenDivided"
enddef ;

lmt_registerglyphs [
    name      = "kindergarten",
    units     = 10,
    % usecolor = true,
    width     = 10,
    height    = 8,
    depth     = 2,
] ;

lmt_registerglyph [ category = "kindergarten", unicode = "0x003D",
    code = "KindergartenEqual"
] ;
lmt_registerglyph [ category = "kindergarten", unicode = "0x002B",
    code = "KindergartenPlus"
] ;
lmt_registerglyph [ category = "kindergarten", unicode = "0x2212",
    code = "KindergartenMinus"
] ;
lmt_registerglyph [ category = "kindergarten", unicode = "0x00D7",

```

```

        code = "KindergartenTimes"
    ] ;
    \mt_registerglyph [ category = "kindergarten", unicode = "0x002F",
        code = "KindergartenDivided"
    ] ;

```

\stopMPcalculation

We also define the colors. If we leave usecolor to true, the text colors will be taken.

```

\definecolor[KindergartenEqual] [darkgreen]
\definecolor[KindergartenPlus] [darkred]
\definecolor[KindergartenMinus] [darkred]
\definecolor[KindergartenTimes] [darkblue]
\definecolor[KindergartenDivided] [darkblue]

\definefontfeature[mathextra] [metapost=kindergarten]

```

Here is an example:

```
\switchtobodyfont[cambria]
```

```
$ y = 2 \times x + a - b / 3 $
```

Scaled up:

$$y = 2 \times x + a - b / 3$$

Of course this won't work out well (yet) with extensible yet, due to related definitions for which we don't have an interface yet. There is one thing that you need to keep in mind: the fonts are flushed when the document gets finalized so you have to make sure that colors are defined at the level that they are still valid at that time. So best put color definitions like the above in the document style.

This is an experimental interface anyway so we don't explain the parameters yet as there might be more of them.

Sometimes examples can be made from answers to questions on the mailing list, like the following:

```

\startMPcalculation{simplefun}
  \vardef QuotationDash =
    \draw image (
      \interim \linecap := squared ;
      \save l ; l := 0.2 ;
      \draw (l/2,2) -- (15-l/2,2) \withpen pencircle scaled l ;
    )
  \enddef ;

\mt_registerglyphs [
  name      = "symbols",
  units     = 10,

```

```

    usecolor = true,
    width     = 15,
    height    = 2.1,
    depth     = 0,
] ;

```

```

\mt_registerglyph [ category = "symbols", unicode = "0x2015", code = "
    QuotationDash ;" ] ;

```

\stopMPcalculation

\definefontfeature[default][default][metapost=symbols]

Of course you need to figure out how to enter the equivalent of `\char "2015` and/or the font used in your editor should have that character too. Here the wide dash is about twice the `\emdash`.

17 Color


17.1 Lab colors

There are by now plenty of examples made by users that use color and MetaFun provides all kind of helpers. So do we need more? When I play around with things or when users come with questions that then result in a nice looking graphic, the result might end up as an example of coding. The following is an example of showing of colors. We have a helper that goes from a so called lab specification to rgb and it does that via xyz transformations. It makes no real sense to interface this beyond this converter. We use this opportunity to demonstrate how to make an interface.

```
\startMPdefinitions
  \vardef cielabmatrix(expr l, mina, maxa, minb, maxb, stp) =
    image (
      for a = mina step stp until maxa :
        for b = minb step stp until maxb :
          draw (a,b) withcolor labtorgb(l,a,b) ;
        endfor ;
      endfor ;
    )
  \enddef ;
\stopMPdefinitions
```

Here we define a macro that makes a color matrix. It can be used as follows

```
\startcombination[nx=4,ny=1]
  {\startMPcode draw cielabmatrix(20, -100, 100, -100, 100, 5) ysize 35mm
   withpen pencircle scaled 2.5 ; \stopMPcode} {\type {l = 20}}
  {\startMPcode draw cielabmatrix(40, -100, 100, -100, 100, 5) ysize 35mm
   withpen pencircle scaled 2.5 ; \stopMPcode} {\type {l = 40}}
  {\startMPcode draw cielabmatrix(60, -100, 100, -100, 100, 5) ysize 35mm
   withpen pencircle scaled 2.5 ; \stopMPcode} {\type {l = 60}}
  {\startMPcode draw cielabmatrix(80, -100, 100, -100, 100, 5) ysize 35mm
   withpen pencircle scaled 2.5 ; \stopMPcode} {\type {l = 80}}
\stopcombination
```

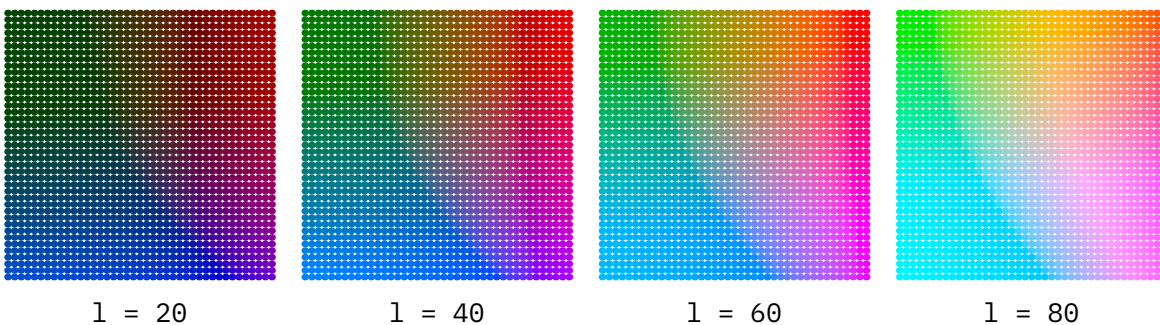


One can of course mess around a bit:

```
\startcombination[nx=4,ny=1]
```

```

{\startMPcode draw cielabmatrix(20, -100, 100, -100, 100, 10) ysize 35mm
  randomized 1 withpen pensquare scaled 4 ; \stopMPcode} {\type {l = 20}}
{\startMPcode draw cielabmatrix(40, -100, 100, -100, 100, 10) ysize 35mm
  randomized 1 withpen pensquare scaled 4 ; \stopMPcode} {\type {l = 40}}
{\startMPcode draw cielabmatrix(60, -100, 100, -100, 100, 10) ysize 35mm
  randomized 1 withpen pensquare scaled 4 ; \stopMPcode} {\type {l = 60}}
{\startMPcode draw cielabmatrix(80, -100, 100, -100, 100, 10) ysize 35mm
  randomized 1 withpen pensquare scaled 4 ; \stopMPcode} {\type {l = 80}}
\stopcombination

```

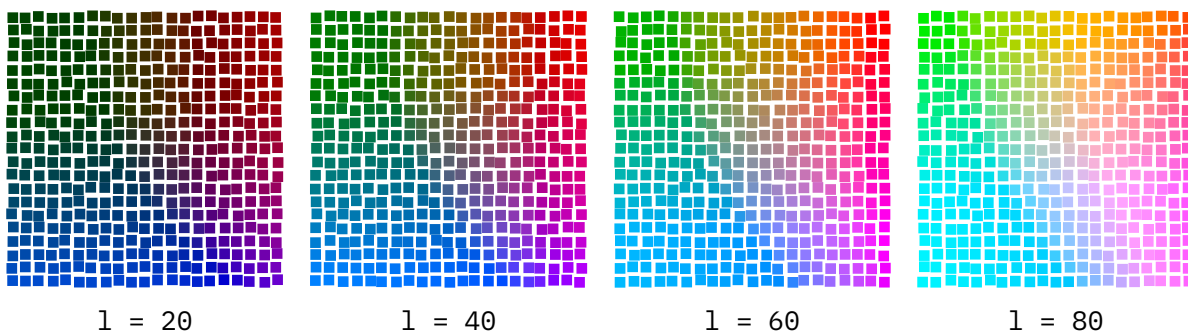


Normally, when you don't go beyond this kind of usage, a simple macro like the above will do. But when you want to make something that is upward compatible (which is one of the principles behind the Con-TeXt user interface(s), you can do this:

```

\startcombination[nx=4,ny=1]
  {\startMPcode draw lmt_labtorgb [ l = 20, step = 20 ] ysize 35mm withpen
    pencircle scaled 8 ; \stopMPcode} {\type {l=20}}
  {\startMPcode draw lmt_labtorgb [ l = 40, step = 20 ] ysize 35mm withpen
    pencircle scaled 8 ; \stopMPcode} {\type {l=40}}
  {\startMPcode draw lmt_labtorgb [ l = 60, step = 20 ] ysize 35mm withpen
    pencircle scaled 8 ; \stopMPcode} {\type {l=60}}
  {\startMPcode draw lmt_labtorgb [ l = 80, step = 20 ] ysize 35mm withpen
    pencircle scaled 8 ; \stopMPcode} {\type {l=80}}
\stopcombination

```

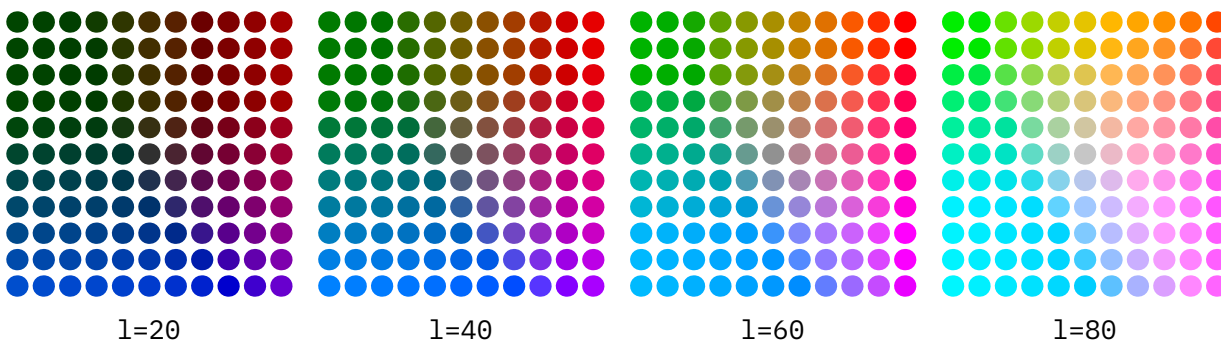

This is a predefined macro in the reserved `lmt_` namespace (don't use that one yourself, create your own). First we preset the possible parameters:

```

presetparameters "labtorgb" [
  mina = -100,

```

```

maxa = 100,
minb = -100,
maxb = 100,
step = 5,
l     = 50,
] ;

```

Next we define the main interface macro:

```
def lmt_labtorgb = applyparameters "labtorgb" "lmt_do_labtorgb" enddef ;
```

Last we do the actual implementation, which looks a lot like the one we started with:

```
vardef lmt_do_labtorgb =
  image (
    pushparameters "labtorgb" ;
    save l ; l := getparameter "l" ;
    for a = getparameter "mina" step getparameter "step"
      until getparameter "maxa" :
      for b = getparameter "minb" step getparameter "step"
        until getparameter "maxb" :
        draw (a,b) withcolor labtorgb(l,a,b) ;
      endfor ;
    endfor ;
    popparameters ;
  )
enddef ;
```

Of course we can now add all kind of extra features but this is what we currently have. Maybe this doesn't belong in the MetaFun core but it's not that much code and a nice demo. After all, there is much in there that is seldom used.

A perceptive color space that uses the lab model is lhc. Here is an example of how that can be used:

```
\startMPdefinitions
vardef lchcolorcircle(expr l, c, n) =
  image (
    save p, h ; path p ; numeric h ;
    p := arcpointlist n of fullcircle ;
    for i within p :
      h := i*360/n ;
      draw
        pathpoint scaled 50
        withpen pencircle scaled (120/n)
        withcolor lchtorgb(l,c,h) ;
      draw
        texttext ("\tt\bf" & decimal h)
        scaled .4
        shifted (pathpoint scaled 50)
        withcolor white ;
    endfor ;
  )

```

```

)
enddef ;
\stopMPdefinitions

```


Of course you can come up with another representation than this but here is how it looks:

```

\startMPcode
draw image (
  draw lchcolorcircle(75,100,24) ;
  draw lchcolorcircle(50,100,24) scaled .75 ;
  draw lchcolorcircle(25,100,24) scaled .50 ;
) ysized 4cm ;
\stopMPcode

```

You can get rather nice color pallets by manipulating the axis without really knowing what color you get. The h value is in angles and shown inside the circles.

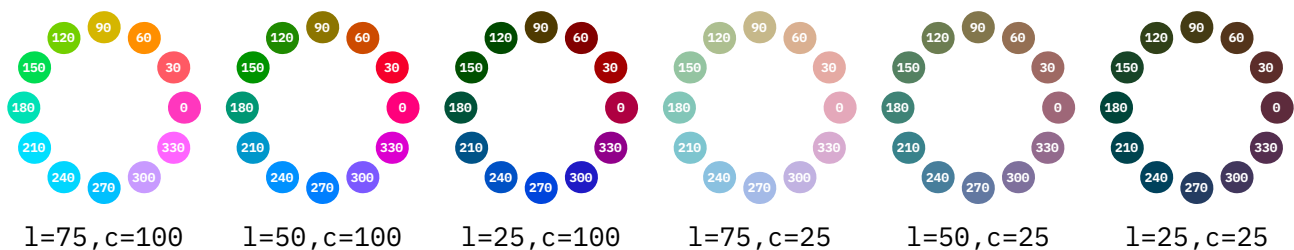

Of course we can again wrap this into a parameter driven macro, this time `lmt_lchcircle` which accepts `l`, `c`, `steps` and a `labels` boolean.

17.2 Transparency

Although transparency is independent from color we discuss one aspect here. Where color is sort of native to MetaPost, especially when we talk `rgb` and `cmyk`, other color spaces are implemented using so called `prescripts`, think “information bound to paths and related wrappers”.

When you do this:

```

\startMPcode
path c ; c := fullcircle scaled 1cm ;
picture p ; p := image (
  fill c shifted ( 0mm,0) withcolor "darkred" ;
  fill c shifted ( 5mm,0) withcolor "darkgreen" ;
  fill c shifted (10mm,0) withcolor "darkblue" ;
) ;

draw p ; draw p shifted (3cm,0) withcolor "middlegray" ;
\stopMPcode

```

You will notice that the picture gets recolored so the color properties set on the picture are applied to separate elements that make it. A picture itself is actually just a list of objects and it has no properties of its own. A way around this is to wrap it in a `group`, `bound` or `clip` which basically means something:

begin, list of objects, end. By putting properties on the wrapper we can support features that apply to what gets wrapped without adapting the properties directly.



Because transparency is also implemented with prescripts we have a problem: should it apply to the wrapper or to everything? In the LuaTeX version of the MetaPost library the scripts get assigned to the first element that supports them and because there only paths can have these properties, you cannot simply change the transparency without looping over the picture and redraw it.

```
\startMPcode
picture q ; q := image (
  fill c shifted ( 0mm,0) withcolor "darkcyan"    withtransparency (1,.5);
  fill c shifted ( 5mm,0) withcolor "darkmagenta"  withtransparency (1,.5);
  fill c shifted (10mm,0) withcolor "darkyellow"   withtransparency (1,.5);
) ;

draw q ; draw q shifted (3cm,0) withtransparency (1,.25) ;
\stopMPcode
```

In LuaMetaTeX we have a way to assign the properties to the elements so we get three less transparent circles:




In MkIV only the first circle becomes lighter.

```
\startMPcode
picture r ; r := image (
  draw p ;
  draw q shifted (7cm,0cm) ;
) ;

draw r ;
draw r shifted (3cm,0) withtransparency (1,.75) ;
\stopMPcode
```

This example shows that when we draw p and q we get the elements at the same level (flattened) so we can indeed apply the transparency to all of them.




So, keep in mind that this only works in MkXL and not in MkVI (unless we also upgrade LuaTeX to support this).

18 Lines

We assume that when you arrived here you already know how to deal with drawing lines including the way they get connected. When you draw a line some properties are controlled by variables which forces you to save existing values when you temporarily adapts them.

```
\startMPcode
draw (0, 0) -- (20, 0) withcolor "darkyellow" ;
draw (0,-1) -- (20,-1) withlinecap butt withcolor "darkred" ;
draw (0,-2) -- (20,-2) withlinecap squared withcolor "darkgreen" ;
draw (0,-3) -- (20,-3) -- (0,-4) withlinejoin squared withcolor "darkblue" ;
\stopMPcode
```

These with features are a LuaMetaTeX extension:

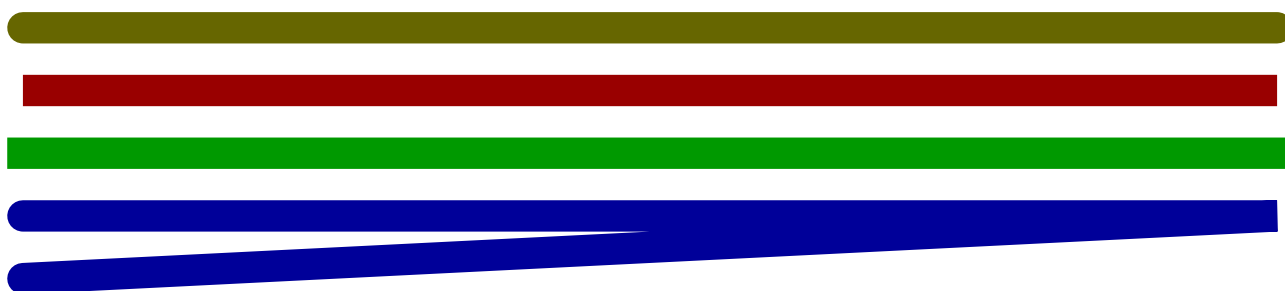

19 Paths

19.1 Introduction

In the end MetaPost is all about creating (beautiful) paths. In this chapter we introduce some extensions to the engine that can be of help when constructing paths. Some relate to combining paths segments, others to generating the points.

19.2 Cycles


The cycle commands closes a path: the end gets connected to the start. One way to construct a path stepwise is using a for loop, as in:

```
\startMPcode
draw (
  (0,sin(0)) for i=pi/20 step pi/20 until 2pi :
    .. (i,sin(i))
  endfor
) xysized(8cm,2cm)
withpen pencircle scaled 1mm
withcolor "darkred" ;
\stopMPcode
```




This looks kind of ugly because we need to make sure that we only put the `..` between points. If we have a closed path we can do this:

```
\startMPcode
draw (
  for i=0 step pi/20 until 2pi :
    (i,sin(i)) ..
  endfor cycle
) xysized(8cm,2cm)
withpen pencircle scaled 1mm
withcolor "darkblue" ;
\stopMPcode
```

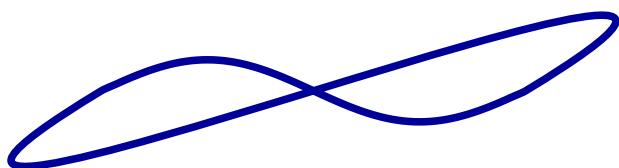

But that is not what we want here. It is for this reason that we have a different operator, one that closes a path without cycling:

```
\startMPcode
draw (
  for i=0 step pi/20 until 2pi :
    (i,sin(i)) ..
  endfor nocycle
) xysized(8cm,2cm)
withpen pencircle scaled 1mm
withcolor "darkgreen" ;
\stopMPcode
```

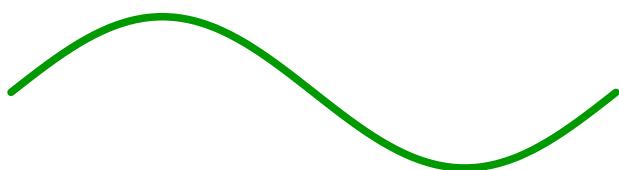

19.3 Combining paths


The & concat operator requires the last point of the previous and the first point of the current path to be the same. This restriction is lifted with the &&, &&& and &&&& commands.

```
\startMPcode
def Example(expr p, q) =
  draw image (
    drawpathonly (p && q) shifted ( 0u,0) ;
    drawpathonly (p &&& q) shifted ( 5u,0) ;
    drawpathonly (p &&&& q) shifted (10u,0) ;
  ) ;
enddef ;

path p[] ; numeric u ; u := 1cm ;
p[1] := (0u,0u) -- (1u,0u) -- (1u,1u) ;
p[2] := (1u,1u) -- (2u,1u) -- (2u,0u) ;

Example(p[1], p[2]) ;

Example(p[1] shifted (0u,-2u), p[2] shifted (1u,-2u)) ;
\stopMPcode
```

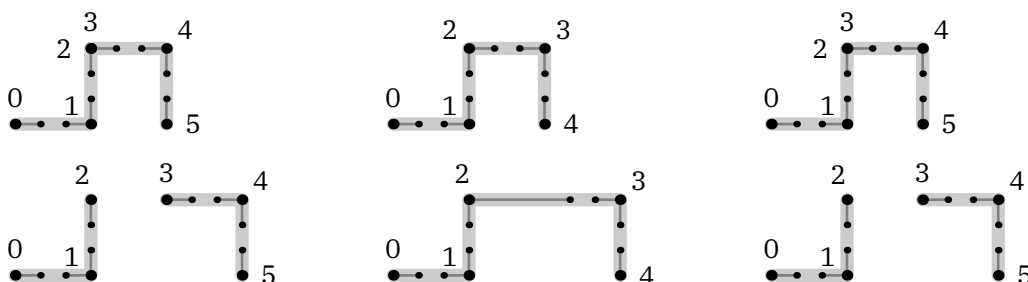

The precise working can be best be seen from what path we get. The single ampersand just does a concat but issues an error when the paths don't touch so we leave that one out.

\startMPdefinitions

path p, q, r ;

p := (0,0) -- (1,0) ;

q := (2,0) -- (3,0) ;

r := (1,0) -- (3,0) ;

vardef Example(**expr** p) =

 % show (p);

drawpathonly p **scaled** 4cm ;

enddef ;

\stopMPdefinitions

This gives us:



```
(0,0)      .. controls (0.33,0) and (0.67,0) .. % p && q
(1,0) {end} .. controls (2,  0) and (1,  0) ..
(2,0) {begin} .. controls (2.33,0) and (2.67,0) ..
(3,0)
```



```
(0,0)      .. controls (0.33,0) and (0.67,0) .. % p && r
(1,0) {end} .. controls (1,  0) and (1,  0) ..
(1,0) {begin} .. controls (1.67,0) and (2.33,0) ..
(3,0)
```



```
(0,0)      .. controls (0.33,0) and (0.67,0) .. % p &&& q
(1,0)      .. controls (2.33,0) and (2.67,0) ..
(3,0)
```



```
(0,0)      .. controls (0.33,0) and (0.67,0) .. % p &&& r
(1,0)      .. controls (1.67,0) and (2.33,0) ..
(3,0)
```



```
(0,0)      .. controls (0.33,0) and (0.67,0) .. % p &&&& q
(1,0) {end} .. controls (2,  0) and (1,  0) ..
(2,0) {begin} .. controls (2.33,0) and (2.67,0) ..
(3,0)
```



```
(0,0) .. controls (0.33,0) and (0.67,0) .. % p &&& r
(1,0) {end} .. controls (1, 0) and (1, 0) ..
(1,0) {begin} .. controls (1.67,0) and (2.33,0) ..
(3,0)
```

If we have one (concat) ampersand we check if the paths touch, error or move on. If we have three (tolerant concat) or four (tolerant append) ampersands we check if the end and begin are the same and if so, we remove one and set the controls points halfway, and then degrade to one (concat) or two (append) ampersands. Finally when (then) we have one ampersand (concat) we connect with some curl magic but when we have two (append) we connect without the curl magic: we let the left and right control points be the points.


Here is another example of usage. Watch how &&& doesn't influence an already closed curve.

```
\startMPcode
path p[] ;

p[1] := (0,0) -- (100,0) -- (100,100) ; for i=2 upto 5 : p[i] := p[1] ; endfor ;

p[1] := p[1] -- cycle ; p[1] := p[1] -- cycle ; p[1] := p[1] -- cycle ;
p[2] := p[2] -- cycle ; p[2] := p[2] &&& cycle ; p[2] := p[2] &&& cycle ;
p[3] := p[3] -- cycle ; p[3] := p[3] &&&& cycle ; p[3] := p[3] &&&& cycle ;
p[4] := p[4] &&& cycle ;
p[5] := p[5] &&&& cycle ;

for i=1 upto 5 :
  % show(p[i]) ;
  fill p[i] shifted (i*110,0) withcolor "middlegray" ;
  draw p[i] shifted (i*110,0) withcolor "darkred" withpen pencircle scaled 5 ;
endfor ;
currentpicture := currentpicture xsize TextWidth ;
\stopMPcode
```

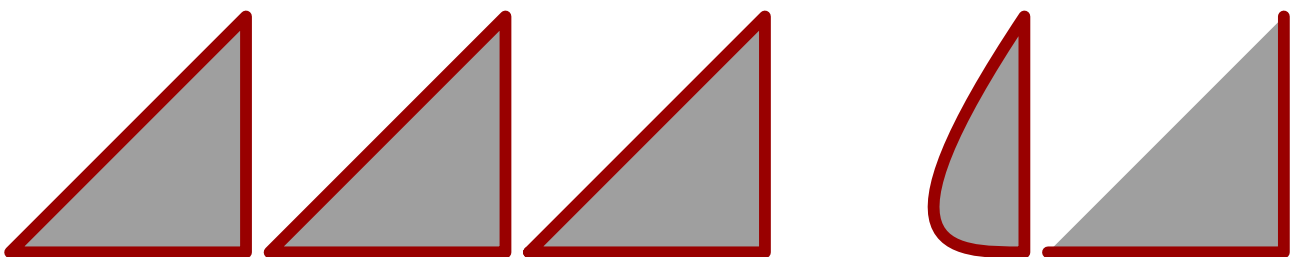

The paths are, here shown with less precision:

```
(0,0) .. controls (33.33,0) and (66.67,-0)
.. (100,0) .. controls (100,33.33) and (100,66.67)
.. (100,100) .. controls (66.67,66.67) and (33.33,33.33)
.. (0,0) .. controls (0,0) and (0,0)
.. (0,0) .. controls (0,0) and (0,0)
```

```

.. cycle

(0,0) .. controls (33.33,0) and (66.67,-0)
.. (100,0) .. controls (100,33.33) and (100,66.67)
.. (100,100) .. controls (66.67,66.67) and (33.33,33.33)
.. cycle

(0,0) {begin} .. controls (33.33,0) and (66.67,-0)
.. (100,0) .. controls (100,33.33) and (100,66.67)
.. (100,100) .. controls (66.67,66.67) and (33.33,33.33)
.. (0,0) {end} .. controls (0,0) and (0,0) % duplicate {end} is
.. (0,0) {end} .. controls (0,0) and (0,0) % sort of an error
.. cycle

(100,100) .. controls (33.33,0) and (66.67,-0)
.. (100,0) .. controls (100,33.33) and (100,66.67)
.. cycle

(0,0) {begin} .. controls (33.33,0) and (66.67,-0)
.. (100,0) .. controls (100,33.33) and (100,66.67)
.. (100,100) {end} .. controls (0,0) and (100,100)
.. cycle

```

These somewhat complicated rules also relate to the intended application: the backend can apply `fill` or `eofill` in which case also cycles are involved as the following examples demonstrate:

\startMPdefinitions

```

path p, q, r ;
p := fullcircle ;
q := reverse fullcircle ;
r := fullcircle shifted (1/2,0) ;
vardef Example(expr p) =
  image (
    eofill p scaled 4cm withcolor "middlegray" ;
    drawpathonly p scaled 4cm ;
  )
enddef ;

```



\stopMPdefinitions

\startMPcode



```

draw Example(p &&& q &&& cycle) ;
draw Example(p &&& cycle &&& q &&& cycle) shifted (8cm,0) ;
\stopMPcode



```

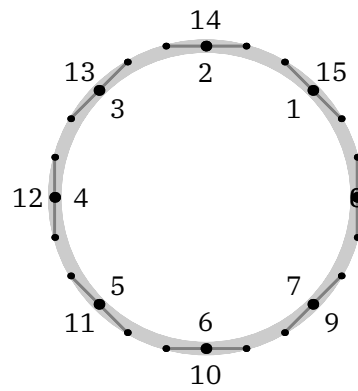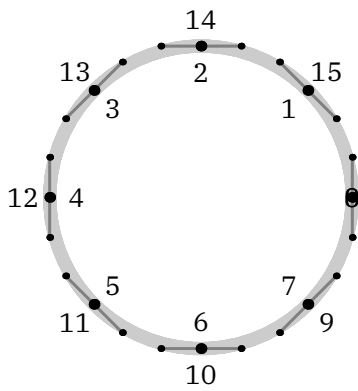



```
\startMPcode
  draw Example(p &&& r &&& cycle) ;
  draw Example(p &&& cycle &&& r &&& cycle) shifted (8cm,0) ;
\stopMPcode
```

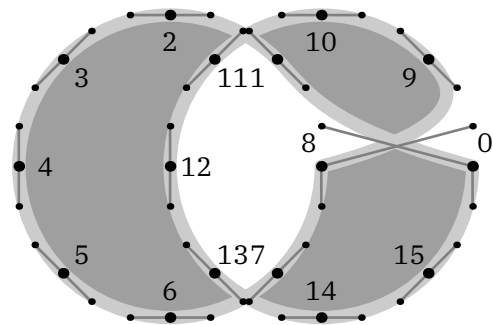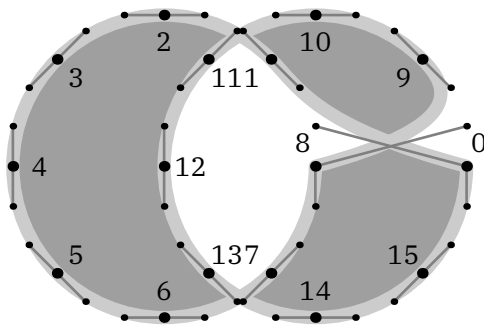

```
\startMPcode
  draw Example(p &&&& q &&&& cycle) ;
  draw Example(p &&&& cycle &&&& q &&&& cycle) shifted (8cm,0) ;
\stopMPcode
```

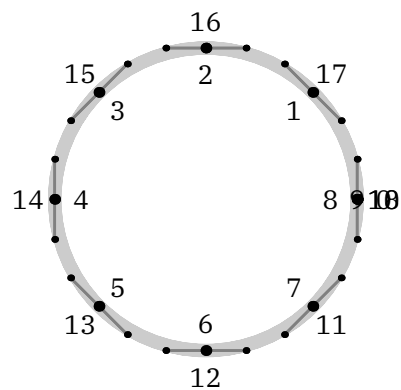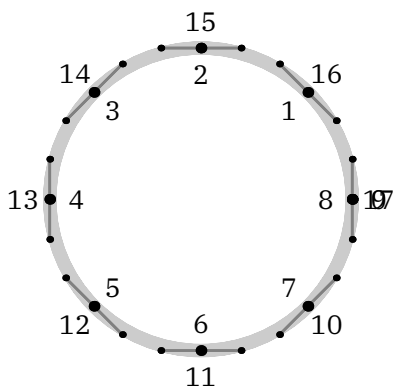

```
\startMPcode
  draw Example(p &&&& r &&&& cycle) ;
  draw Example(p &&&& cycle &&&& r &&&& cycle) shifted (8cm,0) ;
\stopMPcode
```

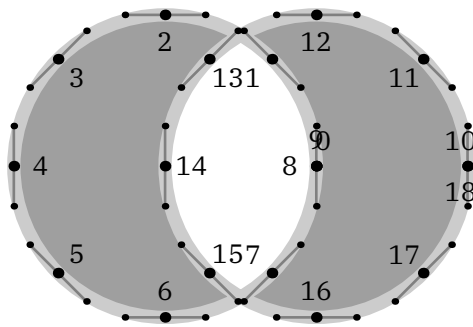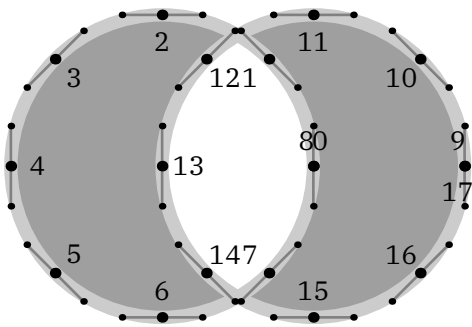

19.4 Implicit points

In the MetaPost library that comes with LuaMetaTeX we have a few extensions that relate to paths. You might wonder why we need these but some relate to the fact that paths can be generated programmatically. A prominent operator (or separator) is `..` and contrary to what one might expect the frequently used `--` is a macro:

```
def -- = { curl 1 } .. { curl 1 } enddef ;
```

This involves interpreting nine tokens as part of expanding the macro and in practice that is fast even for huge paths. Nevertheless we now have a `--` primitive that involves less interpreting and also avoids some intermediate memory allocation of numbers. Of course you can still define it as macro.

When you look at PostScript you'll notice that it has operators for relative and absolute positioning in the horizontal, vertical or combined direction. In LuaMetaTeX we now have similar operators that we will demonstrate with a few examples.

```
\startMPcode
drawarrow origin
  -- xrelative 300
  -- yrelative 20
  -- xrelative -300
  -- cycle
withpen pencircle scaled 2
withcolor "darkred" ;
\stopMPcode
```



In the next example we show a relative position combined with an absolute and we define them as macros. You basically get what goes under the name ‘turtle graphics’:

```
\startMPcode
save h ; def h = -- xrelative enddef ;
save v ; def v = -- yabsolute enddef ;

drawarrow origin
  h 30 v 20 h 30 v 30
  h 30 v 10 h 30 v 50
  h 30 v 60 h 30 v 10
```


\startMPcode

Month	Percentage
March 2020	10
April 2020	25
May 2020	20
June 2020	15
July 2020	18
August 2020	20
September 2020	22
October 2020	25
November 2020	20
December 2020	18
January 2021	20
February 2021	22
March 2021	25

\startMPcode


The relative variant also can take a pair and numeric, as in:

```
\startMPcode
draw origin
  -- xyrelative 10
  -- xyrelative 10
  -- xyrelative(10,-10)
  -- xyrelative(10,-10)
  -- xyrelative 10
  -- xyrelative 10
  -- xyrelative(10,-10)
  -- xyrelative(10,-10)
withpen pencircle scaled 2
withcolor "darkred" ;
\stopMPcode
```



In these examples we used -- but you can mix in . . and control point related operations, although the later is somewhat less intuitive here.

```
\startMPcode
draw yabsolute(10,30)
  .. yabsolute(20,20)
  .. yabsolute(10,10)
  .. yabsolute(20,20)
  .. yabsolute(10,30)
  .. yabsolute(20,20)
  .. yabsolute(10,10)
  .. yabsolute(20,20)
  .. yabsolute(10,30)
withpen pencircle scaled 2
withcolor "darkred" ;
\stopMPcode
```



And with most features, users will likely find a use for it:

```
\startMPcode
draw for i=1 upto 5 :
  yabsolute(10,30) ---
  yabsolute(20,20) ...
  yabsolute(10,10) ---
  yabsolute(20,20) ...
endfor nocycle
withpen pencircle scaled 2
withcolor "darkred" ;
\stopMPcode
```



Here is a more impressive example, the result is shown in figure ??:

```
\startMPcode
for n=10 upto 40 :
  path p ; p := (
    for i = 0 step pi/n until pi :
      yabsolute(cos(i)^2-sin(i)^2,sin(i)^2-cos(i)^2) --
    endfor cycle
  ) ;
  draw p
  withpen pencircle scaled 1/20
  withcolor "darkred" withtransparency (1,.25) ;
endfor ;
currentpicture := currentpicture xysized (TextWidth,.25TextWidth) ;
\stopMPcode
```

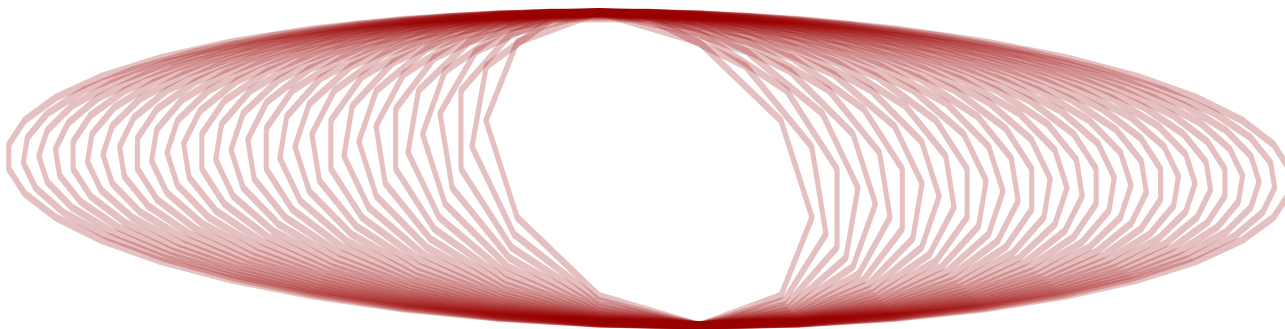


Figure 19.1 Combined relative x and absolute y positioning

19.5 Control points

Most users will create paths by using `...`, `...`, `--` and `---` and accept what they get by the looks. If your expectations are more strict you might use `tension` or `curl` with directions and vectors for the so called control points between connections. In figure 19.2 you see not only controls in action but also two operators that can be used to set the first and second control point. For the record: if you use controls without and the singular pair will be used for both control points.

```
\startMPcode
path p, q, r, s ;

p = origin {dir 25} .. (80,0) .. controls ( 80, 0) and (100,40) .. (140,30)
  .. {dir 0} (180,0) ;
q = origin {dir 25} .. (80,0) .. controls (100,40) and (140,30) .. (140,30)
  .. {dir 0} (180,0) ;
r = origin {dir 25} .. (80,0) .. secondcontrol (100,40) .. (140,30)
  .. {dir 0} (180,0) ;
s = origin {dir 25} .. (80,0) .. firstcontrol (100,40) .. (140,30)
  .. {dir 0} (180,0) ;
```

```

def Example(expr p, t, c) =
  draw p ;
  drawpoints p withcolor "middlegray" ;
  drawcontrollines p withpen pencircle scaled .3 withcolor c ;
  drawcontrolpoints p withpen pencircle scaled 2 withcolor c ;
  label.lft("\smallinfofont current", point 1 of p) ;
  label.top("\smallinfofont next", point 2 of p) ;
  draw thetexttext.rt("\infofont path " & t, (point 3 of p) shifted (5,0)) ;
enddef ;

draw image (
  Example(p, "p", "darkred") ; currentpicture := currentpicture yshifted 50 ;
  Example(q, "q", "darkblue") ; currentpicture := currentpicture yshifted 50 ;
  Example(r, "r", "darkred") ; currentpicture := currentpicture yshifted 50 ;
  Example(s, "s", "darkblue") ; currentpicture := currentpicture yshifted 50 ;
) xsized TextWidth ;
\stopMPcode

```

19.6 Arcs

In PostScript and svg we have an arc command but not in MetaPost. In LMTX we provide a macro that does something similar:

```

\startMPcode
draw
  (0,0) --
  (arc(0,180) scaled 30 shifted (0,30)) --
  cycle
withpen pencircle scaled 2
withcolor "darkred" ;
\stopMPcode

```

The result is not spectacular:



Instead of a primitive with five arguments and the prescribed line drawn from the current point to the beginning of the arc we just use `..`, scaled for the radius, and shifted for the origin. It actually permits more advanced trickery.

```

\startMPcode
draw
  (0,0) ..
  (arc(30,240) xscaled 60 yscaled 30 shifted (0,30)) ..
  cycle
withpen pencircle scaled 2
withcolor "darkred" ;

```


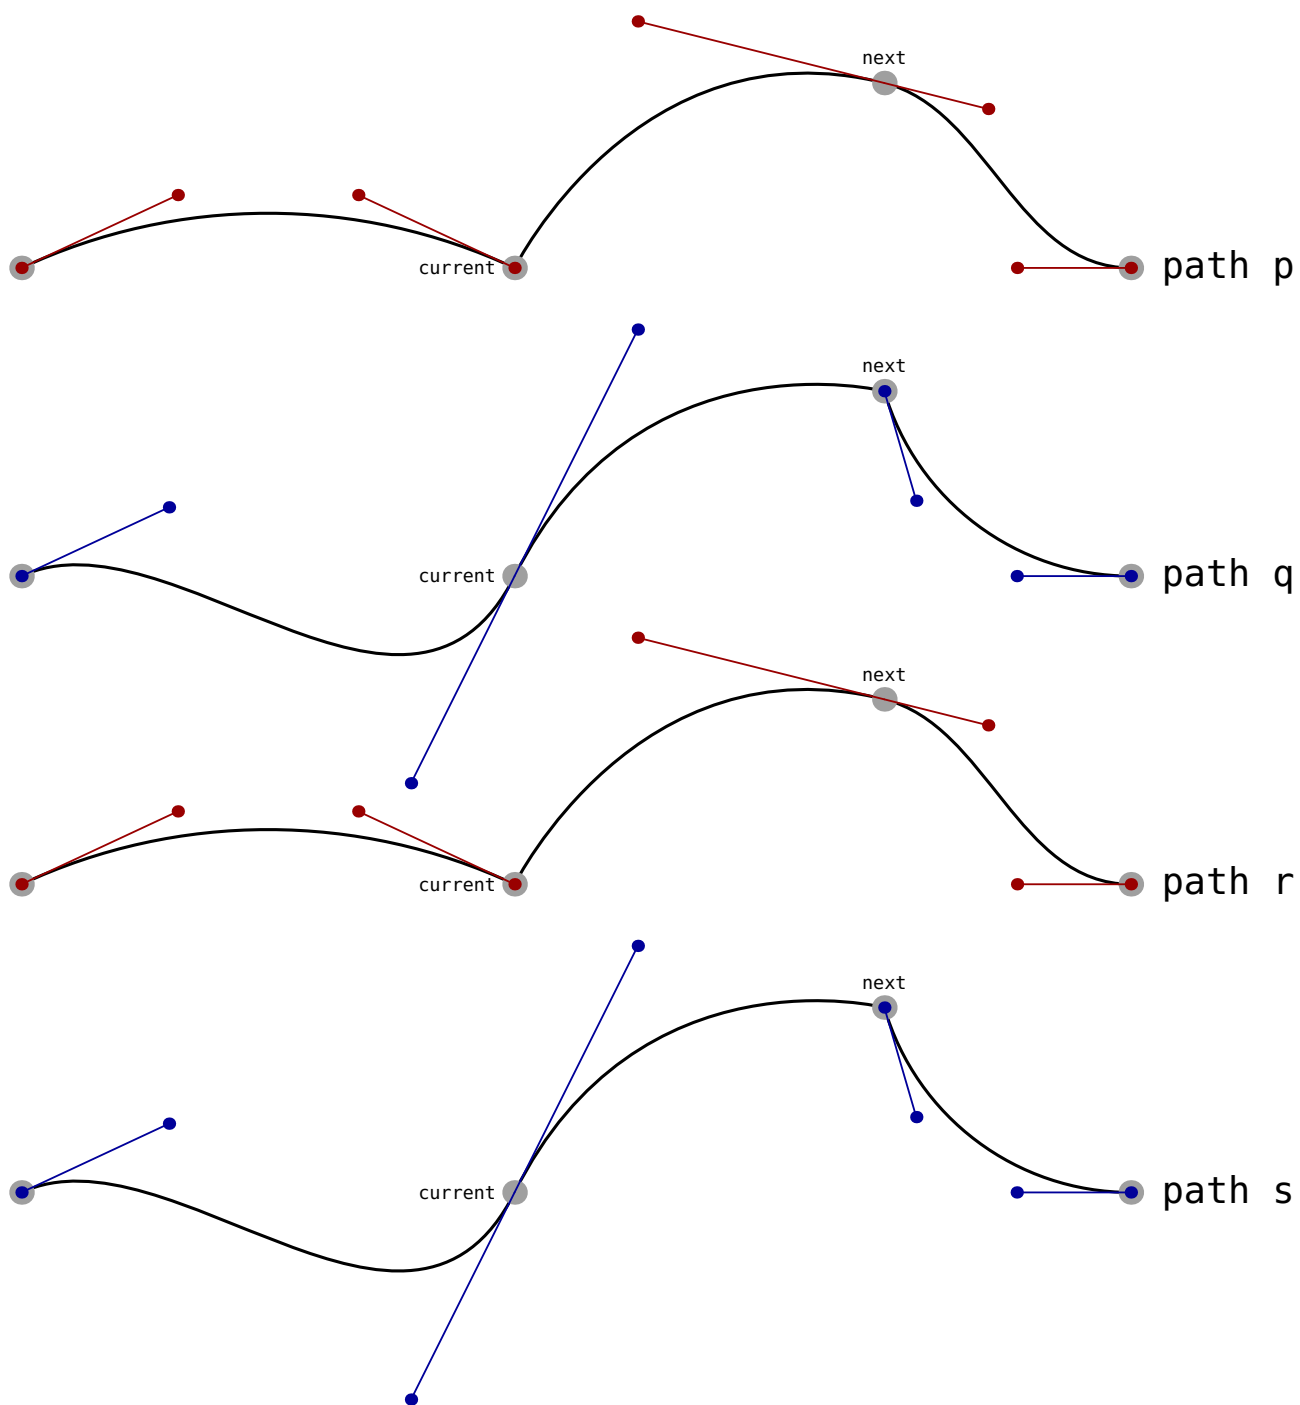


Figure 19.2 Three ways to set the control points.

\stopMPcode

Here time we get smooth connections:



but because we scale differently also a different kind of arc: it is no longer a circle segment, which is often the intended use of arc.


19.7 Loops

The MetaPost program is a follow up on MetaFont, which primary target was to design fonts. The paths that make up glyphs are often not that large and because in most cases we don't know in advance how large a path is they are implemented as linked lists. Now consider a large paths, with say 500 knots. The following assignment:

```
pair a ; a := point 359 of p ;
```

has to jump across 358 knots before it reaches the requested point. Let's take an example of drawing a function by (naively) stepping over values:

```
\startMPcode
path p ; p := for i=0 step 4pi/500 until 4pi: (i,sin(i)) -- endfor nocycle ;
p := p xysized(TextWidth,2cm) ;
draw p ;
\stopMPcode
```

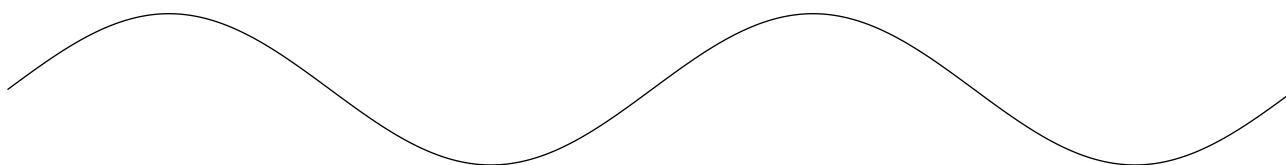

Of course we can just calculate the point directly but here we just want to illustrate a problem.

```
\startMPcode
draw p ; for i=0 step 5 until length(p) :
    drawdot point i of p withpen pencircle scaled 2 ;
endfor ;
\stopMPcode
```

For 500 points, on a modern computer running over the list is rather fast but when we are talking 5000 points it gets noticeable, and given what MetaPost is used for, having many complex graphics calculated at runtime can have some impact on runtime.

Of course we can just calculate the point directly but here we just want to illustrate a problem. Where the previous loop takes 0.002 seconds, the second loop needs 0.001 seconds:

```
\startMPcode
pair p ; for i within p :
    if i mod 5 == 0 :
        drawdot pathpoint withpen pencircle scaled 2 ;
    fi ;
endfor ;
\stopMPcode
```

These numbers are for assigning the point to a pair variable so that we don't take into account the extra drawing (and backend) overhead. The difference in runtime can be neglected but what if we go to 5000 points? Not unsurprisingly we go down from 0.142 seconds to 0.004 seconds. There are plenty examples where runtime can be impacted, for instance when one first takes the xpart point i and then the ypart point i.

One motivation for adding a more efficient loop for paths is that in generative art one has such long parts and drawing that took tens of minutes or more now can be generated in seconds. Another motivation is in analyzing and manipulating paths. In that case we also need access to the control points and maybe even preceding or succeeding points. In figure 19.3 we show the output of the following code:

```
\startMPcode
path p ; p := fullcircle scaled 10cm ;
fill p withcolor "darkred" ;
draw p withpen pencircle scaled 1mm withcolor "middleblue" ;

for i within p :
  draw pathpoint      withpen pencircle scaled 4mm withcolor "middlegray" ;
  draw pathprecontrol withpen pencircle scaled 2mm withcolor "middlegreen" ;
  draw pathpostcontrol withpen pencircle scaled 2mm withcolor "middlegreen" ;
  draw texttext("\ttbf" & decimal i) shifted .6[deltapoint -2,origin] withcolor
    white ;
  draw texttext("\ttbf" & decimal i) shifted .4[pathpoint ,origin] withcolor
    white ;
  draw texttext("\ttbf" & decimal i) shifted .2[deltapoint 2,origin] withcolor
    white ;
endfor ;
\stopMPcode
```

The MetaPost library in LuaMetaTeX uses double linked lists for paths so going back and forward is a rather cheap operation.

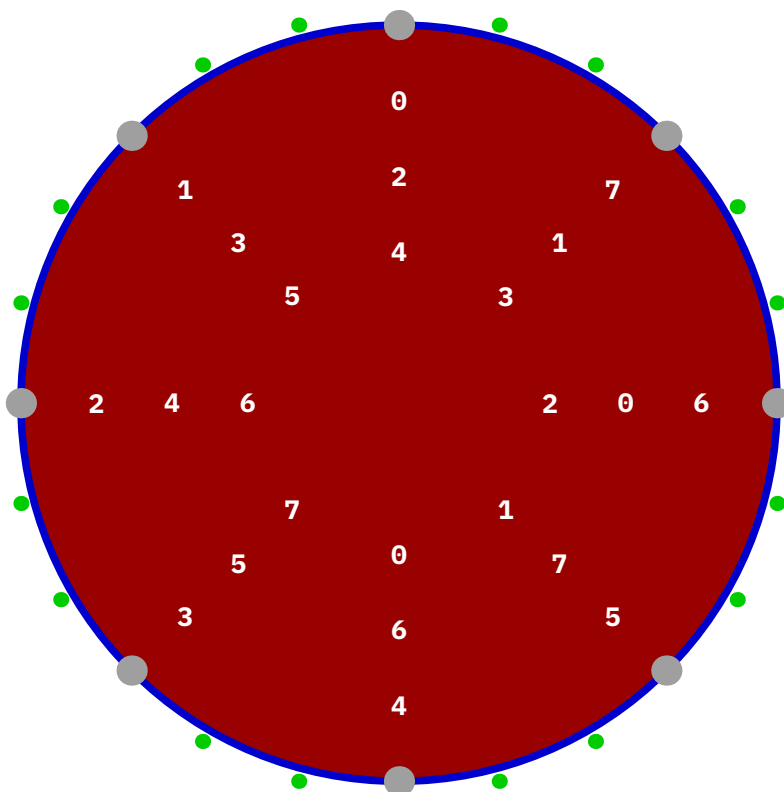


Figure 19.3 Fast looping over paths.

A nice application of this feature is the following, where we use yet another point property, `pathdirection`:

```

vardef dashing (expr pth, shp, stp) =
  for i within arcpointlist stp of pth :
    shp
      rotated angle(pathdirection)
      shifted pathpoint
    &&
  endfor nocycle
enddef ;

```


With:

```

\startMPcode
path p ; p := unitsquare xysized (TextWidth,1cm) ;
draw p withpen pencircle scaled .2mm withcolor darkblue ;
fill dashing (p, triangle scaled 1mm, 100) && cycle withcolor "darkred" ;
\stopMPcode

```

we get:



It is worth noticing that the path returned by `dashing` is actually a combined path where the pen gets lifted between the subpaths. This is what the `&&` does. The `nocycle` is there to intercept the last ‘connector’ (which of course could also have been a `--` or `...`). So we end up with an open path, which why in case of a fill we need to close it by `cycle`. In the next example we show all the accessors:

```


\startMPcode[instance=scaledfun]
path p; p := (fullsquare scaled 3 && fullsquare rotated 45 scaled 2 && cycle) ;

for i within p :
  message(
    "index "      & decimal pathindex
    & ", lastindex " & decimal pathlastindex
    & ", length "   & decimal pathlength
    & ", first "    & if pathfirst : "true" else : "false" fi
    & ", last "     & if pathlast : "true" else : "false" fi
    & ", state "    & decimal pathstate % end/begin subpath
    & ", point "   & ddecimal pathpoint
    & ", postcontrol " & ddecimal pathprecontrol
    & ", precontrol " & ddecimal pathpostcontrol
    & ", direction " & ddecimal pathdirection
    & ", delta "    & ddecimal deltapoint 1
  );
endfor ;

eofill p xysized (TextWidth, 2cm) withcolor "darkred" ;
\stopMPcode

```


If you want to see the messages you need to process it yourself, but this is how the ten point shape looks like:

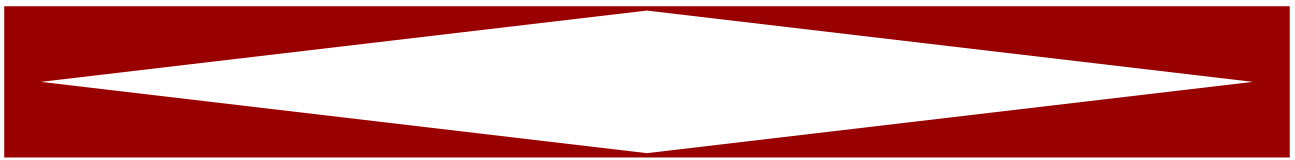

19.8 Randomized paths


When randomizing a path the points move and when such a path has to bound a specific areas that can result in overlap which what is bounded.

```
\startMPcode
path p ; p := fullsquare xyscaled (10cm,2cm) ;
fill p withcolor "darkred" ;
draw p randomized 3mm withpen pencircle scaled 1mm withcolor "middlegray";
setbounds currentpicture to p ;
\stopMPcode
```

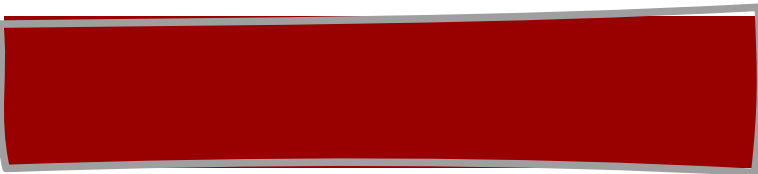

Here are two variants that randomize a path but keep the points where they are. They might be better suited for cases where there is text within the area.

```
\startMPcode
path p ; p := fullsquare xyscaled (10cm,2cm) ;
fill p withcolor "darkblue" ;
draw p randomizedcontrols 3mm withpen pencircle scaled 1mm withcolor "middlegray
";
setbounds currentpicture to p ;
\stopMPcode
```

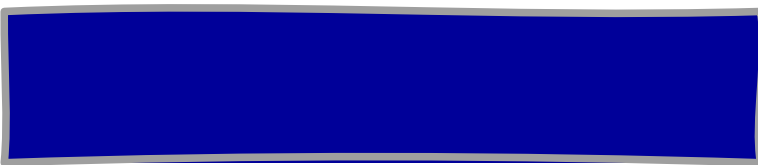

```
\startMPcode
path p ; p := fullsquare xyscaled (10cm,2cm) ;
fill p withcolor "darkyellow" ;
draw p randomrotatedcontrols 15 withpen pencircle scaled 1mm withcolor "
middlegray";
setbounds currentpicture to p ;
\stopMPcode
```



19.9 Connecting


In LuaMetaTeX the `--` operator is a primitive, like `..` and when exploring this we came up with this example that demonstrates the difference with (still a macro) `---`.

```
\startMPcode
path p[] ;
p[1] = origin -- (100, 0) .. (75, 50) .. (50, 100) .. (25, 50) .. cycle ;
p[2] = origin --- (100, 0) .. (75, 50) .. (50, 100) .. (25, 50) .. cycle ;
p[3] = origin -- (100, 0) ... (75, 50) ... (50, 100) ... (25, 50) ... cycle ;
p[4] = origin --- (100, 0) ... (75, 50) ... (50, 100) ... (25, 50) ... cycle ;

draw p[1] withpen pencircle scaled 3bp withcolor "darkblue" ;
draw p[2] withpen pencircle scaled 2bp withcolor "darkyellow" ;
drawpoints p[1] withpen pencircle scaled 3bp withcolor darkred ;

draw image (
  draw p[1] withpen pencircle scaled 4bp withcolor "darkblue" ;
  draw p[2] withpen pencircle scaled 3bp withcolor "darkyellow" ;
  draw p[3] withpen pencircle scaled 2bp withcolor "darkred" ;
  draw p[4] withpen pencircle scaled 1bp withcolor "darkgreen" ;
) shifted (150,0) ;
\stopMPcode
```

Where `...` makes a more tight curve, `---` has consequences for the way a curve gets connected to a straight line segment.

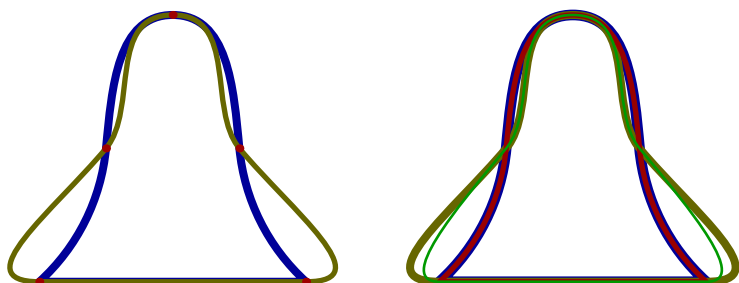

19.10 Curvature

Internally MetaPost only has curves but when a path is output it makes sense to use lines when possible. The ConTeXt backend takes care of that (and further optimizations) but you can check yourself too.

```
\startMPcode
def Test(expr p, c) =
  draw
    p
    withpen pencircle scaled 2mm
    withcolor c ;
  draw
    texttext("\bf " & if not (subpath(2,3) of p hascurvature 0.02) : "not"
      else : "" fi & " curved" )
\stopMPcode
```


```

        shifted center p ;
enddef ;

Test(fullcircle scaled 3cm shifted (0cm,0),"darkred");
Test(fullsquare scaled 3cm shifted (4cm,0),"darkblue");
Test(fullsquare scaled 3cm shifted (8cm,0) randomizedcontrols 1cm,"darkgreen");
\stopMPcode

```

The `hascurvature` macro is a primary and applies a curvature criterium to a (sub)path. The default tolerance in the backend is 131/65536 or 0.002. The same default is used for eliminating points that ‘are the same’.

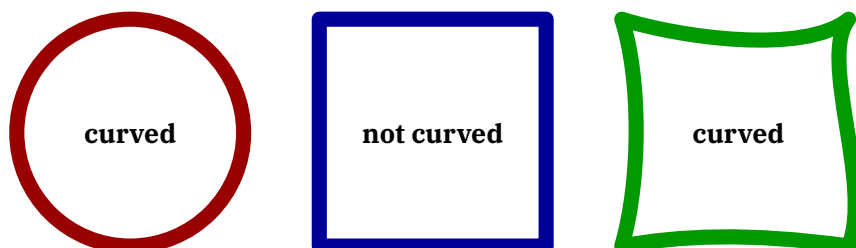

In the rare case that the backend decides for straight lines while actually there is a curve, you can use `withcurvature 1` to bypass the check.

19.11 Joining paths

Say that you have three paths:

```

path p[] ;
p[1] := (0,0) -- (100,0) ;
p[2] := (101,0) -- (100,100) ;
p[3] := (100,101) ;

```

If you join these with:

```
draw p[1] & p[2] & p[3] -- cycle ;
```

You will get an error message telling that the paths don't have common points so that they can't be joined. This can be a problem when your snippets are the result of cutting up a path. In practice the difference between the to be joined coordinates is small, so we provide a way to get around this problem:

```

\startMPcode
interim jointolerance := 5eps ;
draw (0,0) -- (100,0) & (100+4eps,0) -- (100,20) & (100,20+2eps) -- cycle
withpen pencircle scaled 2 withcolor "darkred" ;
\stopMPcode

```

Up to the tolerance is accepted as difference in either direction, so indeed we get a valid result:



Larger values can give a more noticeable side effect:

```

\startMPcode
  interim jointolerance := 20 ;
  draw (0,0) -- (100,0) & (110,10) -- (100,40) & (100,50) -- cycle
    withpen pencircle scaled 2 withcolor "darkred" ;
\stopMPcode

```

It all depends on your need if this is considered okay:




As with everything TeX and MetaPost, once you see what is possible it can be abused:

```

\startMPcode
  interim jointolerance := 20 ;
  randomseed := 10 ;
  draw for i=1 upto 200 :
    (i,50 randomized 10) --
  endfor nocycle
    withpen pencircle scaled .1 ;
  randomseed := 10 ;
  draw for i=1 upto 200 :
    (i,50 randomized 10) if odd i : & else : -- fi
  endfor nocycle
    withcolor "darkred" ;
\stopMPcode

```

We leave it up to the reader to decide how the red line can be interpreted.




Here is another nice example:

```

\startMPcode
  path p[] ;
  p[1] := origin -- (100,50) ;
  p[2] := (200,50) -- (300,0) ;
  draw p[1] && p[2] withpen pencircle scaled 4 withcolor darkgreen ;
  draw p[1] -- p[2] withpen pencircle scaled 2 withcolor "orange" ;
  interim jointolerance := 100 ;
  draw p[1] & p[2] withpen pencircle scaled 1 withcolor darkblue ;
\stopMPcode

```

Watch how we get a curve:

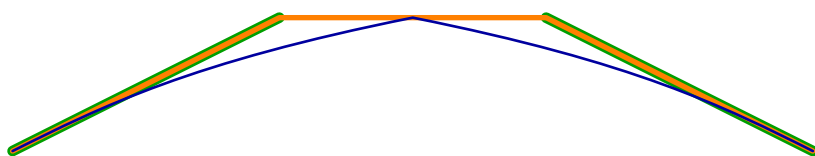

20 Envelopes

20.1 Introduction


Envelopes are what MetaPost makes for a non circular path. A circular path is supported directly by PostScript and pdf. When such a path is rotated, it is still somewhat easy because MetaPost outputs the shape twice, transformed differently, but in the end we have one curve, and filling the right space the two curves bound which is native behavior of path filling. When the pen is more complex, that is not a transformed basic pencircle, MetaPost will calculate a so called envelope. This chapter limits the explanation to what we can observe and better explanations about pens can be found in the MetaFont book.

20.2 Pens

The code involves is non trivial and can only work reliable for paths made from straight lines which is why a pen is always reduced to a path with straight lines. Internally the term ‘convex hull’ is used. In LuaMetaTeX we have that operation as primitive.

```
\startMPcode
pen mypen ; mypen := makepen (fullcircle);
draw origin withpen mypen scaled 100 withcolor "darkblue" ;
\stopMPcode
```

By drawing just one point we see the pen:




Indeed the circle has been simplified here.

```
\startMPcode
def ShowPaths(expr pth) =
  path p[] ;
  p[0] := pth scaled 50;
  p[1] := uncontrolled p[0] ; % show(p[1]);
  p[2] := convexed p[0] ; % show(p[2]);
  draw p[0] shifted ( 0,0) withpen pencircle scaled 5 withcolor "darkgreen" ;
  draw p[1] shifted (100,0) withpen pencircle scaled 5 withcolor "darkred" ;
  draw p[2] shifted (160,0) withpen pencircle scaled 5 withcolor "darkblue" ;
  draw p[1] shifted (260,0) withpen pencircle scaled 5 withcolor "darkred" ;
  draw p[2] shifted (260,0) withpen pencircle scaled 5 withcolor "white" ;
enddef ;

ShowPaths(fullcircle) ;
```

\stopMPcode

In this case the straightforward removal of control points gives the same result as first calculating the convex hull.

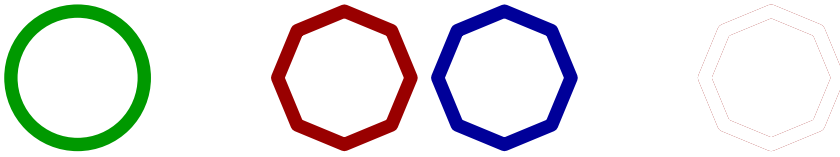


\startMPcode

```
ShowPaths(fullcircle randomized .1) ;
```

\stopMPcode

In this example we still seem to get what we expect:

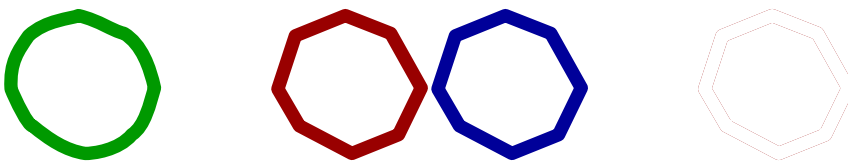


\startMPcode

```
ShowPaths(fullcircle randomized .4) ;
```

\stopMPcode

But a bit of exaggeration shows that we don't get the same:



It all has to do with heuristics and nasty border cases when we turn corners. Here is what these (not randomized) paths look like, first the uncontrolled:

```
(25,0) .. controls (22.56,5.89) and (20.12,11.79)
.. (17,68,17,68) .. controls (11.79,20.12) and (5.89,22.56)
.. (0,25) .. controls (-5.89,22.56) and (-11.79,20.12)
.. (-17,68,17,68) .. controls (-20.12,11.79) and (-22.56,5.89)
.. (-25,0) .. controls (-22.56,-5.89) and (-20.12,-11.79)
.. (-17,68,-17,68) .. controls (-11.79,-20.12) and (-5.89,-22.56)
.. (0,-25) .. controls (5.89,-22.56) and (11.79,-20.12)
.. (17,68,-17,68) .. controls (20.12,-11.79) and (22.56,-5.89)
.. cycle
```

and here is the unconvexed:

```
(-25,0) .. controls (-22.56,-5.89) and (-20.12,-11.79)
.. (-17,68,-17,68) .. controls (-11.79,-20.12) and (-5.89,-22.56)
.. (0,-25) .. controls (5.89,-22.56) and (11.79,-20.12)
.. (17,68,-17,68) .. controls (20.12,-11.79) and (22.56,-5.89)
.. (25,0) .. controls (22.56,5.89) and (20.12,11.79)
```

```

.. (17,68,17,68) .. controls (11.79,20.12) and (5.89,22.56)
.. (0,25) .. controls (-5.89,22.56) and (-11.79,20.12)
.. (-17,68,17,68) .. controls (-20.12,11.79) and (-22.56,5.89)
.. cycle

```

Now, in order to see what convexing has to do with pens we also introduce a ‘nep’ which is a pen that doesn't get its path convexed. We mainly have this variant available for experimenting and documentation purposes. Take these definitions:

```

\startMPdefinitions
path PthP ; PthP := (fullcircle scaled 100) randomized 80 ;
pen PenP ; PenP := makepen PthP ;
nep NepP ; NepP := makenep PthP ;
path ConP ; ConP := convexed PthP ;
path UncP ; UncP := uncontrolled PthP ;
\stopMPdefinitions

```

That are used in:

```

\startMPdefinitions
def Pth =
  draw PthP ;
enddef ;
def Pen =
  draw origin withpen PenP withcolor "darkred" withtransparency (1,.5) ;
enddef ;
def Nep =
  draw origin withpen NepP withcolor "darkblue" withtransparency (1,.5);
enddef ;
def Con =
  fill ConP withpen pencircle scaled 0 withcolor "darkgreen" withtransparency
  (1,.5) ;
enddef ;
def Unc =
  fill UncP withpen pencircle scaled 0 withcolor "darkyellow" withtransparency
  (1,.5) ;
enddef ;
\stopMPdefinitions

```

The main reason for showing the differences in figure 20.1 is that one should be aware of possible side effects


In case you doubt if all this matters, if we use a not to weird path, we're fine, as is demonstrated in figure 20.2; here we used

```

PthP := fullcircle yscaled 80 xscaled 140 rotated 45 ;

```

And when we use such rather normal (non extreme) paths for pens we're ready for envelopes.

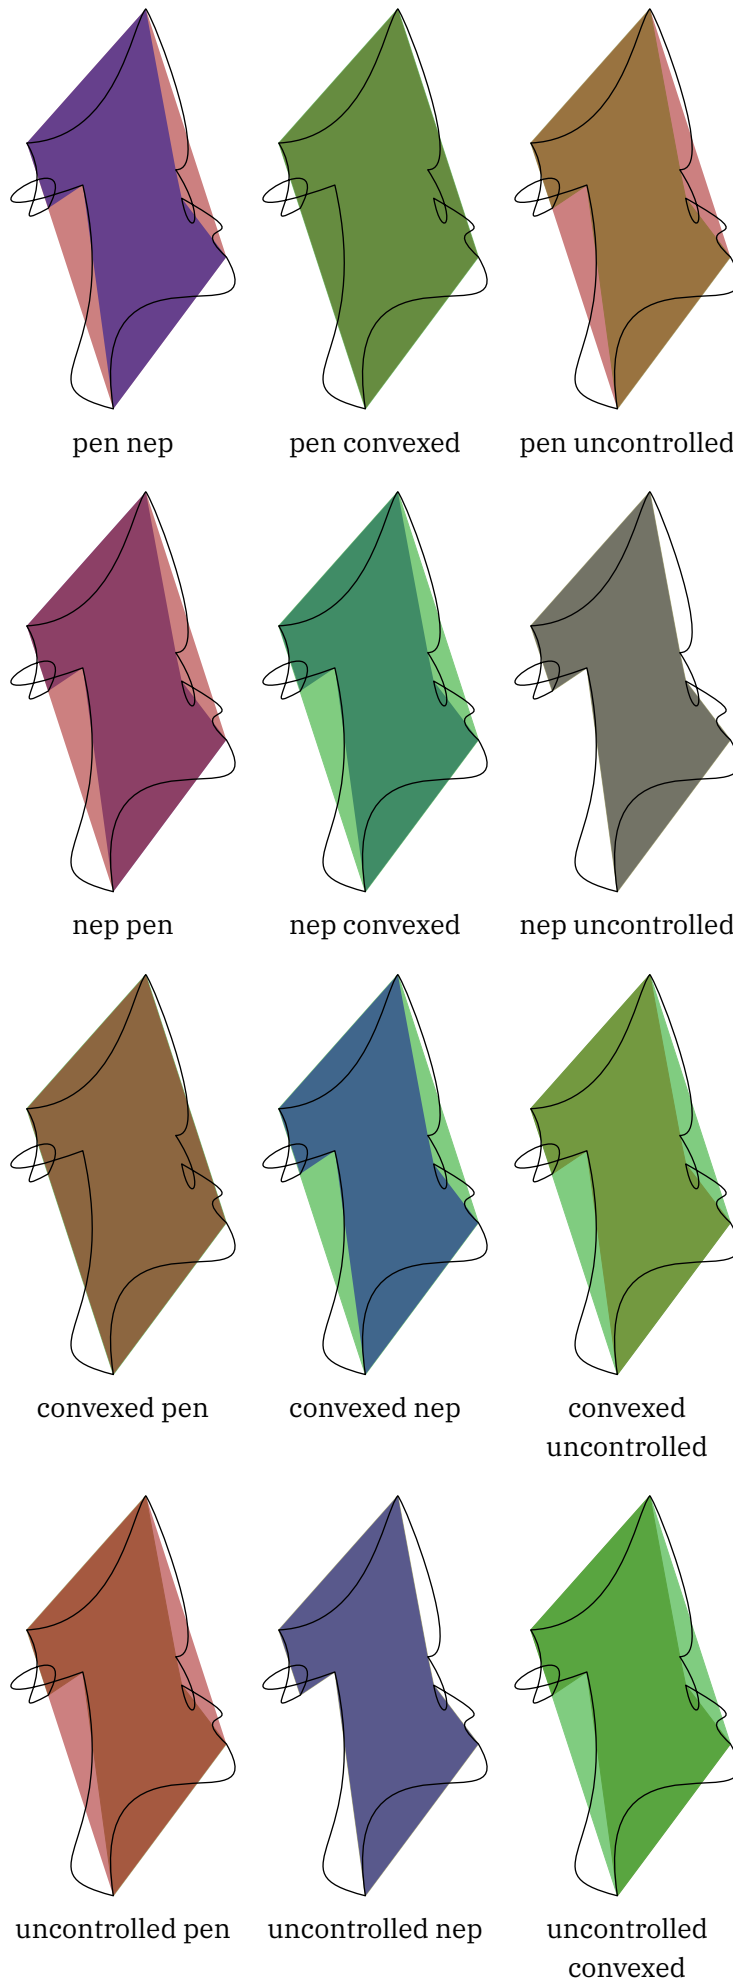

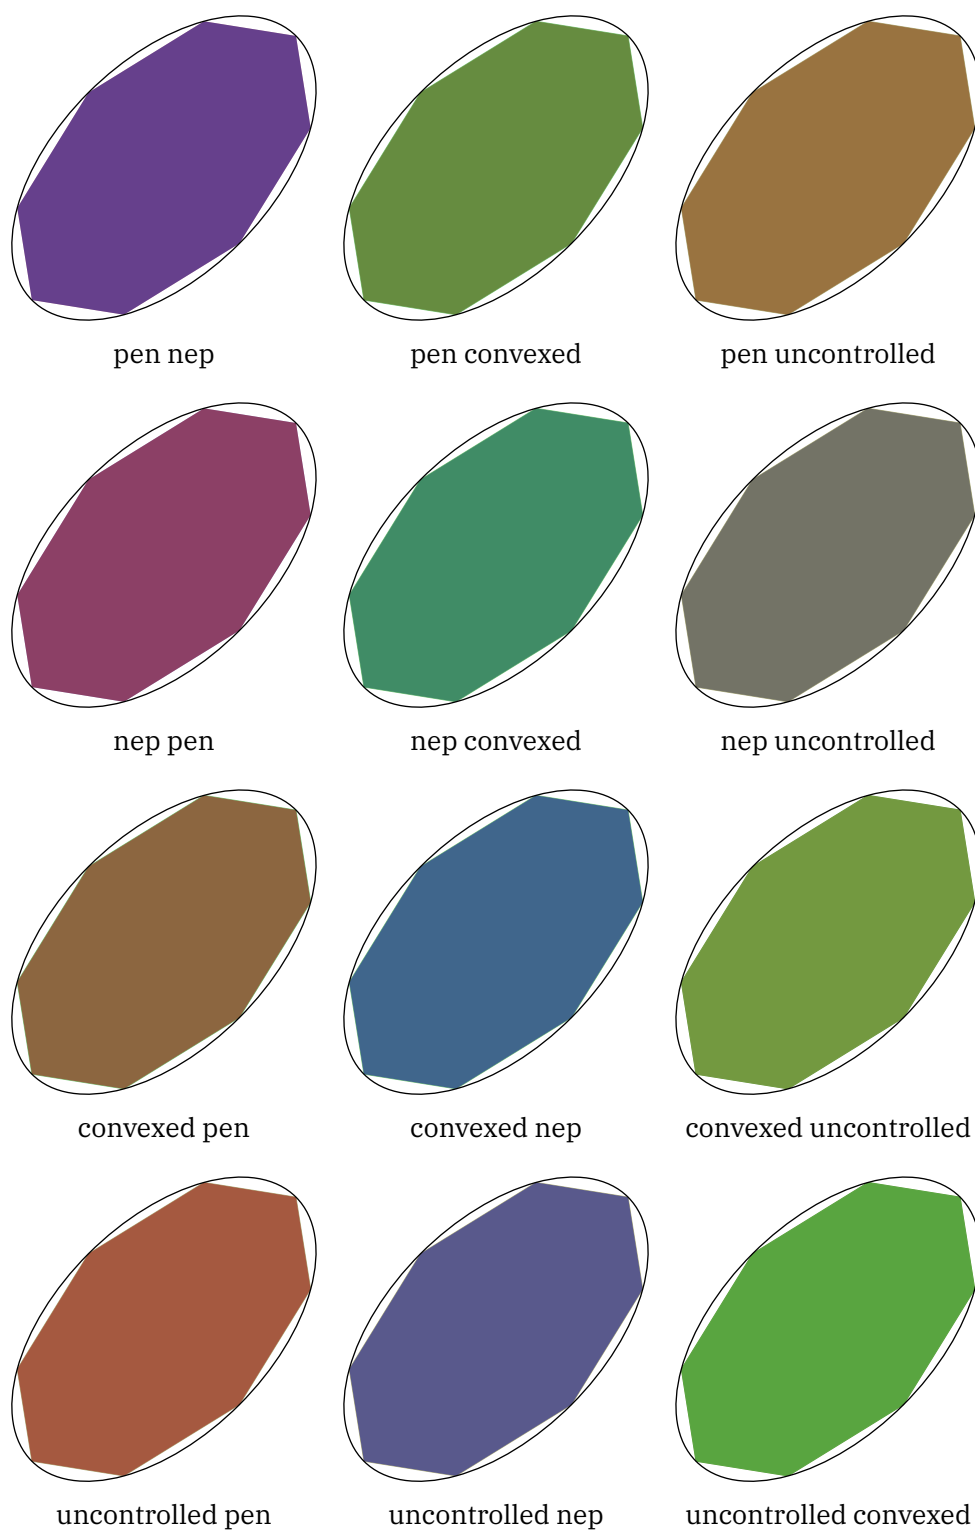


Figure 20.2 When using decent pens the results will be consistent.

20.3 Usage

An envelop is the outline that we get when we run a pen over a path. An envelop is (of course) a closed path. Here is a simple example:

```
\startMPcode
path p ; p := origin -- (100,10) -- cycle ;
path e ; e := envelope pensquare scaled 10 rotated 45 of p ;

draw e withpen pencircle scaled 2 withcolor "darkred" ;
draw p withpen pencircle scaled 2 withcolor "darkgray" ;

fill e shifted (120,0) withcolor "darkred" ;
draw p shifted (120,0) withcolor "lightgray" withpen pencircle scaled 2 ;

fill e shifted (240,0)
  withshademethod "linear"
  withshadecolors ("darkred","lightgray") ;
\stopMPcode
```

This also demonstrates that this way you can apply a shade to a path:



One problem with envelopes is that you can get unexpected results so let's try to explore some details. We start by defining a main path, a pen, a path from the pen, and two envelopes.


```
\startMPcode
path PthP ; PthP := fullcircle xysized(10cm,2cm) ;
pen PenP ; PenP := pensquare scaled 2mm rotated 45 ;
path PthU ; PthU := fullsquare scaled 2mm rotated 45 ;
path PatP ; PatP := makepath PenP ;

path PthI ; PthI := envelope PenP of reverse PthP ;
path PthO ; PthO := envelope PenP of PthP ;

fill PthI && PthO && cycle withcolor "lightgray" ;

draw PthI withcolor "darkred" ;
draw PthO withcolor "darkgreen" ;
draw PthP dashed evenly ;
\stopMPcode
```


Watch the difference between the two envelopes: one is the result from traveling the pen clockwise and one from running anti-clockwise:

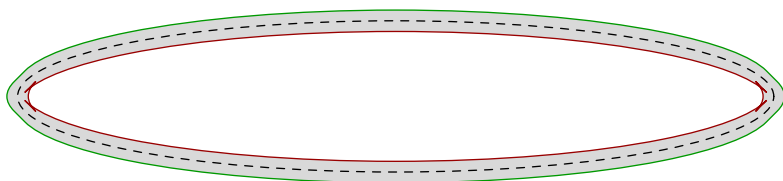


We can emulate running the pen over the path:

```
\startMPcode
fill PthI && PthO && cycle withcolor "darkgray" ;
fill
  for i within (arcpointlist 50 of PthP) :
    PatP shifted pathpoint &&
  endfor cycle
  withcolor "middlegray" ;
\stopMPcode
```

Instead of drawing 50 paths, we draw an efficient single one made from 50 segments and we get this:

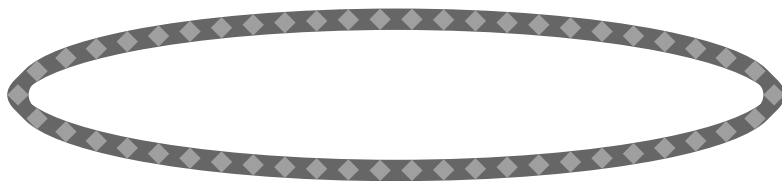

If you look closely at the first rendering you will notice an artifact in the inner envelope.



We can get rid of this with a helper macro:

```
\startMPcode
draw reducedenvelope(PthI) withpen pencircle scaled .4mm withcolor "darkred" ;
\stopMPcode
```


Of course you get no guarantees but here it works:



One reason why the helper is not in the core is that it doesn't catch all cases:


```
\startMPcode
path p ; p := fullcircle scaled 4cm ;
pen e ; e := pensquare scaled 3mm ;
draw envelope e of p ;
draw envelope e of reverse p ;
p := p rotated eps shifted (5cm,0) ;
draw envelope e of p ;
draw envelope e of reverse p ;
p := p shifted (5cm,0) ;
draw p enveloped e ;
draw (reverse p) enveloped e ;
\stopMPcode
```

Watch how a tiny rotations rid us of the weird rectangle, and the helper makes three extra inflected points go away but we're still stuck with an imperfection.

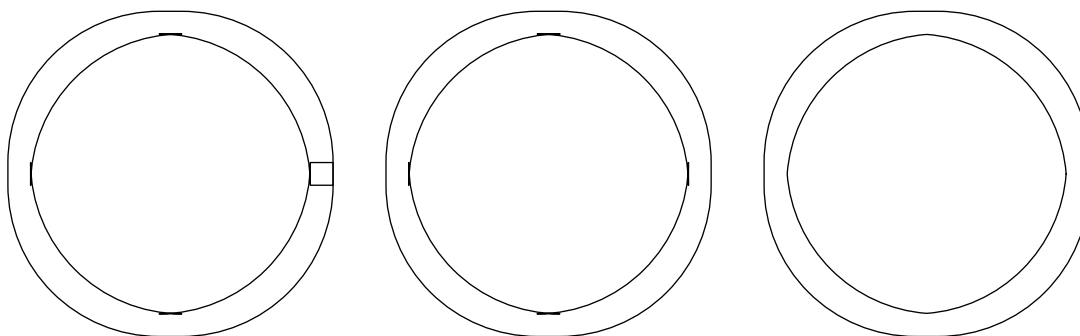

When we only fill the envelope we don't suffer from this'because the artifacts stay within the bounds. Sometimes rotating the pen by eps also helps.

```
\startMPcode
path p ; p := fullcircle scaled 4cm ;
pen e ; e := pensquare scaled 3mm ;
fill
    (envelope e of p) && (envelope e of reverse p) && cycle
    withcolor "darkblue" ;
draw % just show the artifacts:
    (envelope e of p) && (envelope e of reverse p) && cycle
    withcolor "white" ;
\stopMPcode
```



20.4 Details

For those who are interested in seeing what goes on behind the scenes, this section shows some examples that we made when writing an article about envelopes. We start with a couple of definitions

```
\startMPdefinitions
loadmodule("misc") ;

path mypaths[] ;
path mypens[] ;

mypens[ 1 ] := fullcircle    scaled 15mm ;
mypens[ 2 ] := fulldiamond   scaled 15mm ;
```

```

mypens[ 3] := fulltriangle scaled 15mm ;
mypens[ 4] := fullsquare scaled 15mm ; % randomized 4mm ;
mypens[ 5] := starring(-1/3) scaled 15mm ;
mypens[ 6] := starring(-1/2) scaled 15mm ;
mypens[ 7] := starring(-eps) scaled 15mm ;
mypens[ 8] := starring(1) scaled 15mm ;
mypens[ 9] := starring(1/2) scaled 15mm ;
mypens[10] := starring(eps) scaled 15mm ;

mypaths[1] := fullcircle scaled 10cm ;
mypaths[2] := ((0,0) -- (1/2,1/2) -- (2/2,0)) scaled 10cm ;
mypaths[3] := ((0,0) -- (1/2,1/2) -- (2/2,0) -- cycle) scaled 10cm ;
\stopMPdefinitions

```

We are not going to use all these shapes and pens here but you might want to try out some yourself. We Figure 20.3 we apply a so called pensquare to the paths. In Figure 20.4 we use a star but MetaPost will turn this one into a rectangle. In Figure 20.5 we also use star but here the points are used.

```

\startMPcode
draw showenvelope(mypaths[1], mypens[4]) ;
draw showenvelope(mypaths[2], mypens[4]) shifted (10cm, 1cm) ;
draw showenvelope(mypaths[3], mypens[4]) shifted (10cm, -6cm) ;
\stopMPcode

```

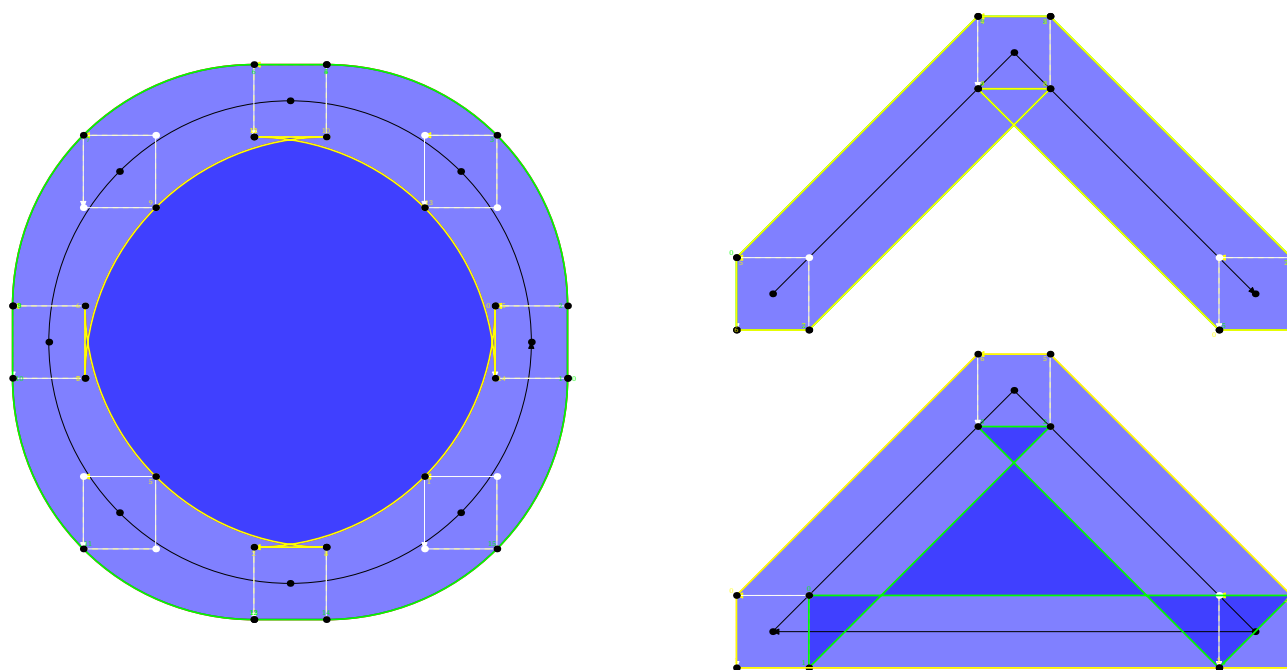


Figure 20.3 How pen 4 creates an envelope.

```

\startMPcode
draw showenvelope(mypaths[1], mypens[6]) ;
draw showenvelope(mypaths[2], mypens[6]) shifted (10cm, 1cm) ;
draw showenvelope(mypaths[3], mypens[6]) shifted (10cm, -6cm) ;
\stopMPcode
\stopMPcode

```

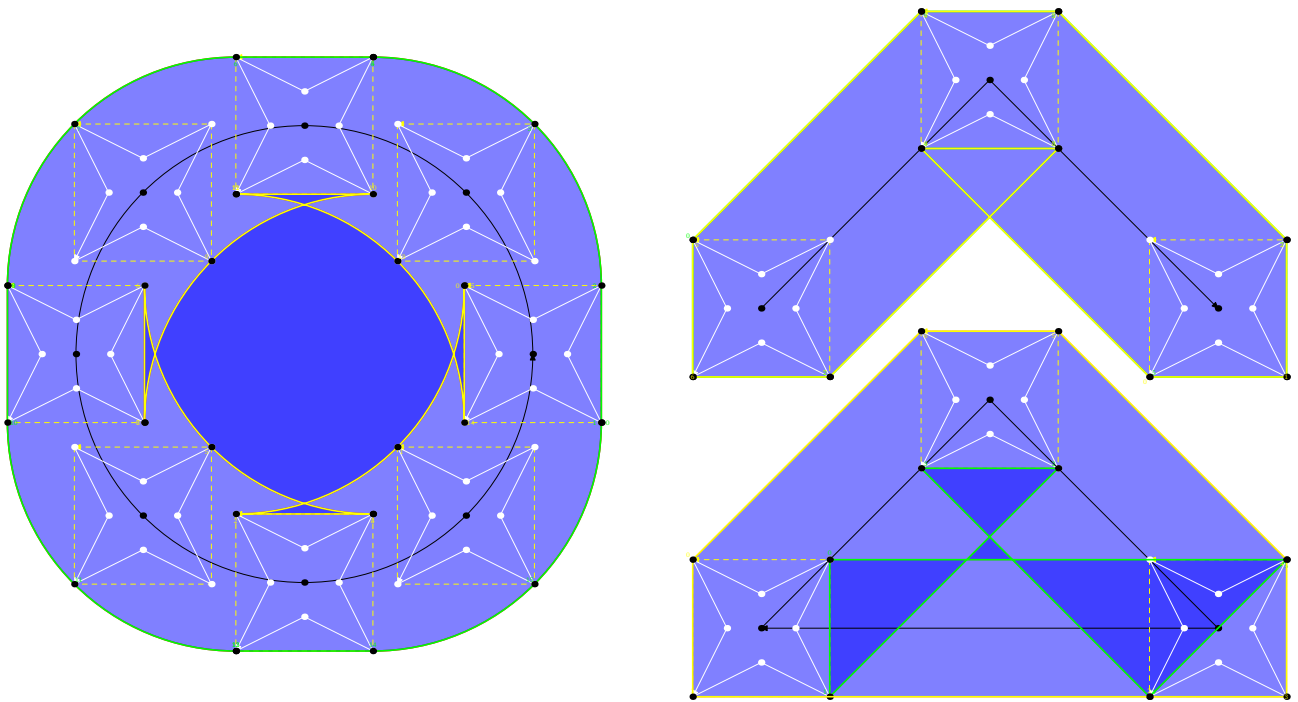


Figure 20.4 How pen 6 creates an envelope.

```
\startMPcode
draw showenvelope(mypaths[1], mypens[9]) ;
draw showenvelope(mypaths[2], mypens[9]) shifted (10cm, 1cm) ;
draw showenvelope(mypaths[3], mypens[9]) shifted (10cm, -6cm) ;
\stopMPcode
```

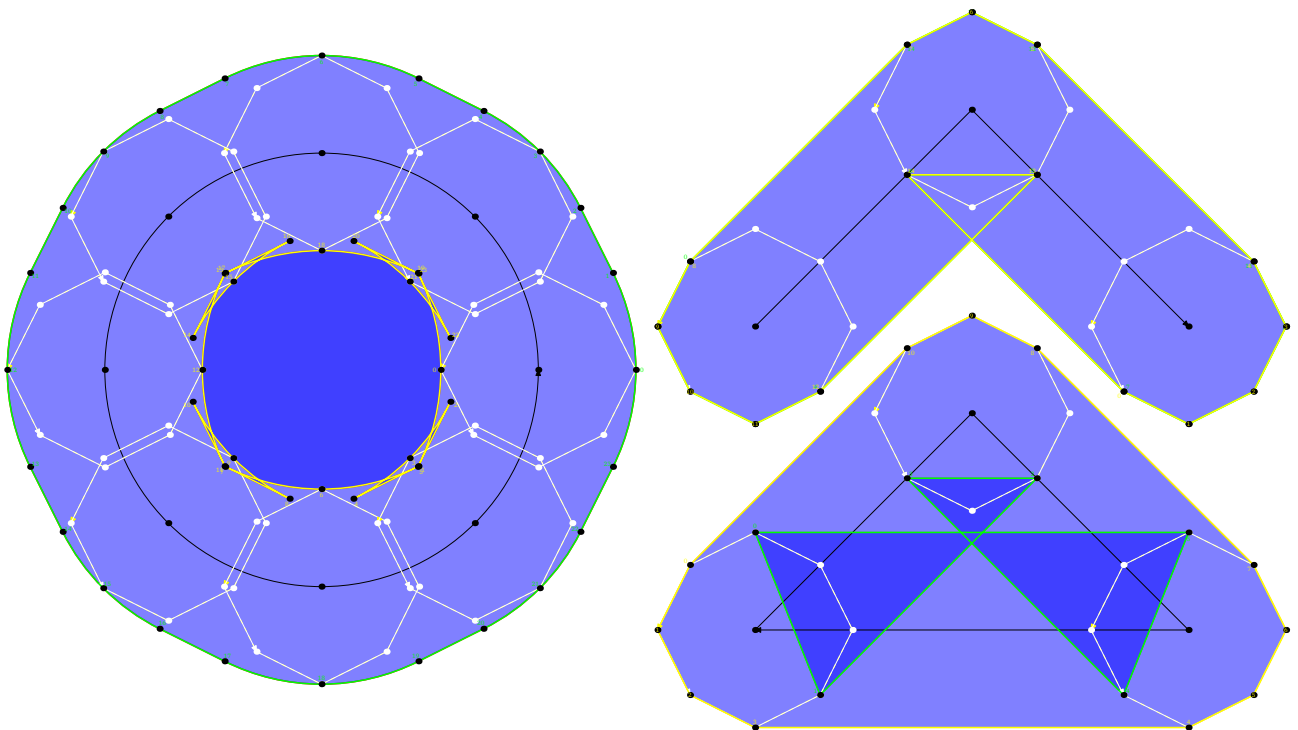


Figure 20.5 How pen 9 creates an envelope.

20.5 Reducing

If you watch the third shape in the previous examples, the last figure differs in that it has a symmetrical inner envelope. We can actually use this knowledge to define a pensquare that is better suited for envelopes. We take this example:

```
\startMPdefinitions
def ExamplePaths =
  path PthA ; PthA := fullcircle scaled 5cm ;
  path PthB ; PthB := triangle scaled 5cm ;

  draw envelope pensquare scaled 10mm of reverse PthA
    withpen pencircle scaled 2mm
    withcolor "darkblue"
  ;
  draw envelope pensquare scaled 10mm of reverse PthB
    withpen pencircle scaled 2mm
    withcolor "darkblue"
  ;

  draw (reverse PthA) enveloped (pensquare scaled 10mm)
    withpen pencircle scaled 2mm
    withcolor "darkred"
  ;
  draw (reverse PthB) enveloped (pensquare scaled 10mm)
    withpen pencircle scaled 2mm
    withcolor "darkred"
  ;
enddef ;
\stopMPdefinitions
```

We define two renderings, one with the normal pensquare definition:


```
\startMPcode
pensquare := makepen(unitsquare shifted -(.5,.5)) ; ExamplePaths ;
\stopMPcode
```

and one with an alternative definition where we have middle points on the edges that stick out one eps:

```
\startMPcode
pensquare := makepen((starring(eps) scaled 1/2)) ; ExamplePaths ;
\stopMPcode
```

This gives figure 20.6. The blue extensions are what we get without clean up but at least the alternative has symmetrical ears.

When you have a somewhat weird envelope the `reducedenvelope` macro might be able to improve it. The `<pth> enveloped <pen>` primary macro has this built in.

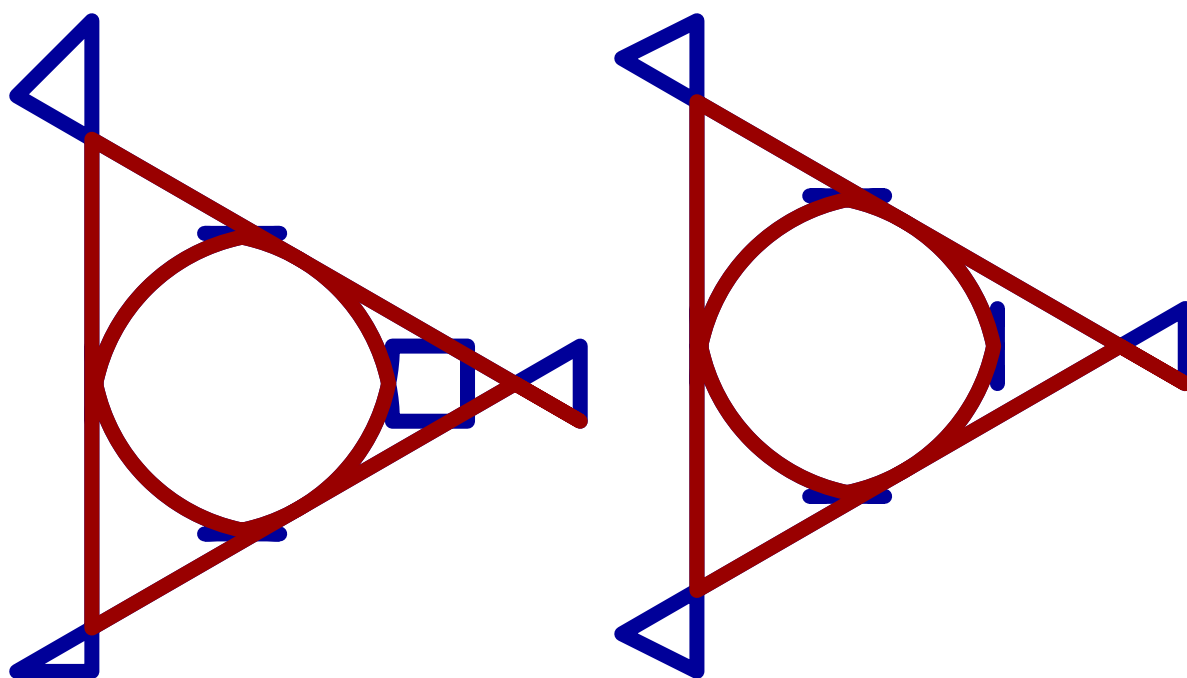

default pensquare

alternative pensquare

Figure 20.6 An alternative pensquare.

21 Groups

This is just a quick example of an experimental features.

```
\startMPcode
  fill fullcircle scaled 2cm shifted ( 5mm,2cm) withcolor "darkblue" ;
  fill fullcircle scaled 2cm shifted (15mm,2cm) withcolor "darkblue" ;

  fill fullcircle scaled 2cm shifted ( 5mm,-2cm) withcolor "darkgreen" ;
  fill fullcircle scaled 2cm shifted (15mm,-2cm) withcolor "darkgreen" ;


  draw image (
    fill fullcircle scaled 4cm withcolor "darkred" ;
    fill fullcircle scaled 4cm shifted (2cm,0) withcolor "darkred" ;

    setgroup currentpicture to boundingbox currentpicture
      withtransparency (1,.5) ;
  ) ;

  draw image (
    fill fullcircle scaled 3cm withcolor "darkyellow"
      withtransparency (1,.5) ;
    fill fullcircle scaled 3cm shifted (2cm,0) withcolor "darkyellow"
      withtransparency (1,.5) ;
  ) ;

  addbackground withcolor "darkgray" ;
\stopMPcode
```

A group create an object that when transparency is applied is treated as a group.

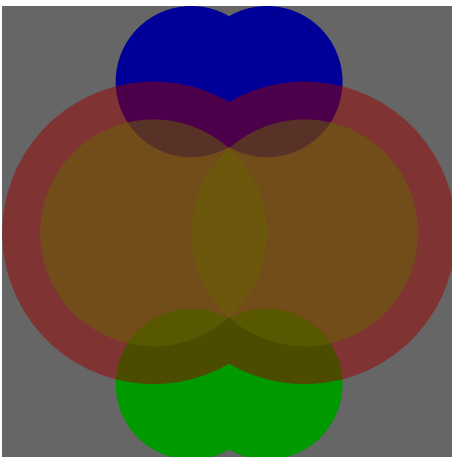


(Groups might become more powerful in the future, like reusable components but then some more juggling is needed.)

22 Potrace

22.1 Introduction

The potrace connection targets at bitmaps. You can think of logos that only exist as bitmaps while outlines are preferred, but in this case we actually think more of bitmaps that the user lays out. In order to give an impression what we are talking about I give three simple examples:

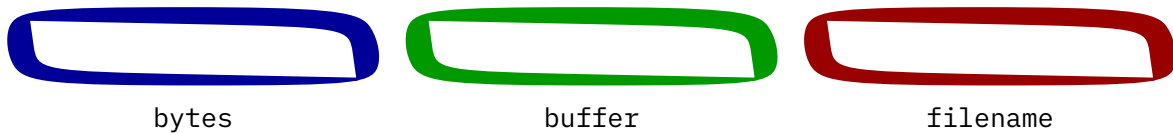

Here we vectorize bitmaps with Peter Selingers potrace library, that we built in LuaMetaTeX. We can directly feed bytes in a MetaFun blob:

```
\startMPcode
  fill
    lmt_potraced [ bytes =
      "0111111111111111111111111111100
      11000000000000000000000000000110
      11000000000000000000000000000011
      11000000000000000000000000000011
      11000000000000000000000000000011
      011000000000000000000000000000011
      0011111111111111111111111111110",
    ] ysize 1cm
    withcolor "darkblue"
    withpen pencircle scaled 1 ;
\stopMPcode
```

But we can also go via a file that has the same data:

```
\startMPcode
  fill
    lmt_potraced [
      filename = "potraced.txt",
    ] ysize 1cm
    withcolor "darkgreen"
    withpen pencircle scaled 1 ;
\stopMPcode
```

Of course we can also use buffers:

```
\startMPcode
  fill
    lmt_potraced [
      buffer = "potraced",
    ] ysize 1cm
```

```

        withcolor "darkred"
        withpen pencircle scaled 1 ;
\stopMPcode

```

You feed a bitmap specification and get back a MetaPost path, likely multiple subpaths sewed together. You can of course draw and fill that path, or store it in a path variable and then do both.

In the following sections we will explore the various options and some tricks. The main message in this section is that you need to look at bitmaps with vectorized eyes because that is what you get in the end: a vector representation.

22.2 Functions

todo

22.3 Icons

When Mikael Sundqvist and I were playing with potrace in MetaFun his girls came up with this pattern.

```

\startMPcode
fill
  lmt_potraced [ bytes =
    "001111100
    010000010
    100000001
    101101101
    100000001
    101000101
    100111001
    010000010
    001111100",
    size = 1,
  ] xysized (3cm,3cm)
  withcolor "middleorange" ;
\stopMPcode

```

This produces the following icon. The somewhat asymmetrical shape gives it a charm, and it is surprising how little code is needed. This picture inspired Willi Egger to make a ten by ten composition gadget for the attendants of the 2023 ConT_EXt meeting that was used in a tutorial.




We use this to demonstrate a few more features of the interface:

```

\startMPcode
draw
  lmt_potraced [ bytes =
    "..11111.."
    ".1....1."
    "1.....1"
    "1.11.11.1"
    "1.....1"
    "1.1...1.1"
    "1..111..1"
    ".1....1."
    "..11111.." ,
    polygon = true,
    size = 1,
  ] xysized (3cm,3cm)
  withcolor "darkblue"
  withpen pencircle scaled 1mm ;
\stopMPcode

```

This contour is actually accurate:



We can color some components:

```

\startMPcode
draw image (
  lmt_startpotraced [ bytes =
    "..11111.."
    ".1....1."
    "1.....1"
    "1.22.22.1"
    "1.....1"
    "1.3...3.1"
    "1..333..1"
    ".1....1."
    "..11111.."
  ] ;
  fill lmt_potraced [ value = "1", size = 1 ]
    withcolor "darkred" ;
  fill lmt_potraced [ value = "3", size = 1 ]
    withcolor "darkgreen" ;
  fill lmt_potraced [ value = "2", size = 0 ]
    withcolor "darkblue" ;


```

```

    lmt_stoppotraced ;
) xysized (3cm,3cm) ;
\stopMPcode

```

Of course there must be enough distinction (white space) between the shapes:




Again we show the polygons:

```

\startMPcode
draw image (
  lmt_startpotraced [ bytes =
    "..11111.."
    ".1.....1."
    "1.....1"
    "1.22.22.1"
    "1.....1"
    "1.3...3.1"
    "1..333..1"
    ".1.....1."
    "..11111.."
  ] ;
  draw lmt_potraced [ value = "1", size = 1, polygon = true ]
    withcolor "darkred" ;
  draw lmt_potraced [ value = "3", size = 1, polygon = true ]
    withcolor "darkgreen" ;
  draw lmt_potraced [ value = "2", size = 0, polygon = true ]
    withcolor "darkblue" ;
  lmt_stoppotraced ;
)
  xysized (3cm,3cm)
  withpen pencircle scaled 1mm ;
\stopMPcode

```

Gives:



We can do the same with data defined in Lua:

```

\startluacode
io.savedata("temp.txt",[[
..11111..
.1.....1.
1.....1
1.22.22.1
1.....1
1.3...3.1
1..333..1
.1.....1.
..11111..
]])
\stopluacode

```

With:

```

\startMPcode
draw image (
  lmt_startpotraced [ filename = "temp.txt" ] ;
  fill lmt_potraced [ value = "1", size = 1 ]
    withcolor "darkcyan" ;
  fill lmt_potraced [ value = "3", size = 1 ]
    withcolor "darkmagenta" ;
  fill lmt_potraced [ value = "2", size = 0 ]
    withcolor "darkyellow" ;
  lmt_stoppotraced ;
) xysized (3cm,3cm) ;
\stopMPcode

```

Indeed we get:

22.4 Fonts

maybe

23 Extensions

23.1 Introduction

This is an uncorrected preliminary chapter.

The T_EX and MetaPost macro languages each have their characteristics and as a result the Lua interfaces in both these subsystems are different. There are however some similarities in fetching from, scanning, and pushing back into these subsystems and by using wrappers the nasty details get hidden from users. Wrapping also permits these interfaces to evolve to a stable state.

In due time much will be documented but currently a lot is also a bit experimental because that is the way I can converge to what works best. You can assume that the solutions in the `mlib-*.lmt` files in some form stay (unless it looks too weird). Just stick to the abstractions and you will be fine.

The functionality described here is available in LMTX. Although some prototypes can be found in MkIV you should not expect the same behavior there.

23.2 The LUA interface (strings)

23.2.1 Strings

At some point the `runscript` primitive was added to `mplib`. Because officially the library is not bound to Lua this neutral name was chosen. In `LuaMetaTEX` we have a follow up on that library and although it's still neutral we just assume that Lua is used. The `MetaFun` follow up is therefore called `LuaMetaFun`, and it used the new interfaces to implement efficient going back and forth between T_EX, MetaPost and Lua.

The `runscript` macro is used like this:

```
\startMPcode
draw
  textext("This will print \quotation{Hi} in the console!")
  xsize TextWidth
  withcolor "darkblue" ;
runscript("print('Hi')");
\stopMPcode
```

The `runscript` primitive triggers a callback that gets the string passed. This callback then does some magic, normally compiling that string into byte code and execute it. The compiled function can return a string that is then fed back into the MetaPost `scantokens` primitive command. So, that return value has to be valid MetaPost!

```
\startMPcode
string s ;
s := runscript("mp.quoted('This will return a string!')") ;
```

```
draw texttext(s)
  xsized TextWidth
  withcolor "darkgreen" ;
\stopMPcode
```

The `mp.quoted` call is one of the build into ConT_EXt ways to pipe back something to MetaPost. We will cover this later. If you don't want to use that feature, the call would have looked like this:

```
\startMPcode
string s ;
s := runscript("return " &
  "'" & ditto &
  "Ditto is a string that contains a double quote!"
  & ditto & "'")
) ;
draw texttext(s)
  xsized TextWidth
  withcolor "darkred" ;
\stopMPcode
```

The `ditto` with ampersands trickery constructs a string with embedded quotes which is needed because you want to pass back a string and MetaPost only considers something a string when it sees double quotes.

23.2.2 Numerics

Instead of a string you can also pass a numeric:

```
\startMPcode
runscript 10000;
\stopMPcode
```

This time, on the console you will see something:

```
metapost > lua > 1: bad index: 10000
metapost > lua > 1: no result, invalid code: 10000
```

This is because at the Lua end this number should result in some action, in the case of ConT_EXt calling a registered function. Because the given number is unknown nothing is done. These messages come from ConT_EXt, and MetaPost will keep silent because we don't pass anything back.

This numeric interface only makes sense when the callback handles it and the way ConT_EXt does that is probably unique to that macro package. You can of course create MetaPost instances yourself (in Lua) and handle callbacks your own way: you get a string, do this, you get a number, do that.

23.2.3 Helpers

In order to help users passing data to the Lua end there are some helper macros defined using the `lua` macro with suffixes:


```
draw lua.mp.foo(0,2,(3,4)) ;
fill lua.MP.foo(0,2,(3,4)) ;
```

The lowercase mp namespace is for ConT_EXt itself so if you use that for your own extensions, there is no guarantee against future clashes. The uppercase MP namespace is for users. In any case you need to be aware of expansion, so foo should not expand to something weird (variable names and vardef macro names are okay).

At the Lua end these are mapped onto functions, like:

```
function mp.foo(n,m,p)
  -- do something
end
function MP.foo(n,m,p)
  -- do something
end
```

23.3 Printing back

In the previous chapter we saw mp.quoted being used to print back a string to MetaPost for processing by scantokens. Not all function in the mp namespace are meant for usage, so best stick to what is described here.

The most generic print is mp.print that takes multiple arguments. A numeric value is flushed as serialized number and a string is passed along (so no quotes are added). A boolean becomes true or false. A table with six elements is seen as a transform and otherwise passed as pair, color or cmyk color definition. The print command takes multiple arguments and the results are concatenated into one string with other prints so far.

Because this mechanism is already available in MkIV we remain compatible which means that the print functions are available in the mp namespace but also in the mp.aux namespace. In the meantime we moved to the print namespace. The main print command does a guess about what it is fed and will inject that as string. Thereby the next are all valid:

```
fill fullcircle scaled runscript("mp.print      ('3cm')") withcolor "darkred" ;
fill fullcircle scaled runscript("mp.print.print('2cm')") withcolor "darkgreen" ;
fill fullcircle scaled runscript("mp.aux.print  ('1cm')") withcolor "darkblue" ;
```

string	string	passed as it is but with percent, double quote and newline escaped
boolean	boolean	the true or false primitives
integer	number	an integer
number	number	a float
numeric	number	a float (same as previous)
points	number	a scaled numeric with pt unit
pair	numbers or table	a pair (x,y) or (x,x)
pairpoints	numbers or table	idem but with scaled numbers and a pt unit
triplet	numbers or table	a rgb triplet (r,g,b)
tripletpoints	numbers or table	idem but with scaled numbers and a pt unit
quadruple	numbers or table	a cmyk quadruple (c,m,y,k)

quadruplepoints	numbers or table	idem but with scaled numbers and a pt unit
color	numbers or table	a numeric, triplet or quadruple
transform	numbers or table	a six element transform
print	whatever	the normal semi-intelligent printer
fprint	format, whatever	the normal semi-intelligent printer using a format
vprint	variable	the normal semi-intelligent printer with escaped percents, quotes and newlines
quoted	string	a valid string surrounded by quotes with an optional first format specifier

A more complex printer is `path` that takes upto three arguments. The first argument is a table. Entries have two or six elements where the last two are control points. The second argument indicates the connector: `true` and `nil` indicate `..` while `false` will use `--`. When the last argument is `true` we have a closed path. Alternatively the table can have a boolean `cycle` field. So these are all valid:

```
local t1 = { {0,0}, {1,0}, {1,1}, {0,1} }
local t2 = { {0,0}, {1,0}, {1,1}, {0,1}, cycle = true }
```

```
mp.print.path(t1)
mp.print.path(t1,nil,true)
mp.print.path(t1,true,true)
mp.print.path(t1,false)
mp.print.path(t1,false,true)
mp.print.path(ts,false)
mp.print.path(t1,"...",true)
mp.print.path(t1,"..",true)
mp.print.path(t2,"..")
```

As with the already mentioned simple printers there is a variant that scales: `pathpoints` (an alternative is of course to scale the whole path by `pt`).

The result of what goes into the print functions is collected and flushed to MetaPost at the end of a call. You can directly push something in the buffer with `mp.direct` and condense the (so far) buffered content with `mp.flush`. Normally you will not need such low level handling.

23.4 Direct values

The print functions accumulate and flush at the end. Alternatively you can return a value. In that case the type determines what gets done:

number	native quantity
boolean	native quantity (<i>I need to check this!</i>)
string	feeds into scantokens
table	feeds concatenated into scantokens

Instead of return you can also call an injector. The repertoire is similar to the printers: `boolean`, `cmypcolor`, `color`, `integer`, `number`, `numeric`, `pair`, `path`, `quadruplet`, `string`, `transform`, `triplet` and `whatever` (kind of automatic):

```
function MP.MyFunction()
```

```
mp.inject.string("This is just a string.")
end
```

The whd, xy and pt injectors inject triplets, pairs and numeric scaled from T_EX scaled points to base points.

23.5 Registering

Quite some of the build in functionality uses a slightly different approach. It roughly works as follows:

```
% reserve an index and set its value:
```

```
newscriptindex user_me_foo ; user_me_foo := scriptindex "user_me_foo" ;
```

```
% wrap the call into a macro:
```

```
def me_foo = runscript user_me_foo enddef ;
```

A macro can of course be more complex, for instance take arguments and push those into the script call:

```
def me_foo(expr a, b) = runscript user_me_foo a b enddef ;
```

But before this is done at the MetaPost end, you need to define the Lua function:

```
local function user_me_foo()
  -- do something useful
end
```

```
metapost.registerscript("user_me_foo",user_me_foo)
```

In this case you use the print and inject functions, of course only when you want to push back some result.

Alternatively you can do:

```
metapost.registerdirect("user_me_foo",user_me_foo)
metapost.registertokens("user_me_foo",user_me_foo)
```

A direct script will treat return values as native, so string and tables are like quoted string and interpreted objects (boolean, numeric, tables). The tokens variant will feed the strings and concatenated tables into scantokens.

The script index can be fetched at the Lua end with:

```
local index = metapost.scriptindex(name)
```

23.6 Codes and such

Using the to be discussed scanners assumes that you know some of the internals (or at least concepts) of MetaPost. Taco has written some excellent tutorials on the way MetaPost handles input. Here we just mention what you can run into.

Each primitive, macro or variable falls into a category. The primitives are grouped in a way that permits handling them as category and the following table shows the grouping. Internally the subcategories are called modes. You should treat these numbers as abstractions because they can change over time, depending on how the library evolves. Modes can normally be ignored.

code	mode	name	code category
65	1	#@	macrospecial
52	123	&	ampersand
52	124	&&	ampersand
52	125	&&&	ampersand
52	126	&&&&	ampersand
59	110	*	secondarybinary
46	108	+	plusorminus
48	113	++	tertiarybinary
48	114	+-+	tertiarybinary
79	0	,	comma
46	109	-	plusorminus
50	0	..	pathjoin
58	111	/	slash
78	0	:	colon
77	0	:=	assignment
80	0	;	semicolon
54	117	<	primarybinary
54	118	<=	primarybinary
54	122	<>	primarybinary
55	121	=	equals
54	119	>	primarybinary
54	120	>=	primarybinary
65	2	@	macrospecial
65	3	@#	macrospecial
36	61	ASCII	unary
67	0	[leftbracket
9	0	\	relax
68	0]	rightbracket
59	112	^	secondarybinary
21	0	addto	addto
71	2	also	thingstoadd
56	116	and	and
36	94	angle	unary
36	93	arclength	unary
40	158	arcpoint	ofbinary
40	159	arcpointlist	ofbinary
40	157	arctime	ofbinary
63	0	atleast	atleast
26	1	batchmode	mode
34	0	begingroup	begingroup
36	17	blackpart	unary
36	13	bluepart	unary
32	21	boolean	typename

36	107	bounded	unary
40	163	boundingpath	ofbinary
1	0	btex	btex
36	84	centerof	unary
36	85	centerofmass	unary
36	62	char	unary
43	21	charcode	internal
43	24	chardp	internal
43	23	charht	internal
43	25	charic	internal
43	22	charwd	internal
22	38	clip	setbounds
36	105	clipped	unary
36	46	closefrom	unary
32	29	cmkcolor	typename
32	28	color	typename
36	66	colormodel	unary
71	1	contour	thingstoadd
61	0	controls	controls
36	57	convexed	unary
36	86	corners	unary
36	77	cosd	unary
64	0	curl	curl
36	14	cyanpart	unary
39	95	cycle	cycle
70	1	dashed	with
36	69	dashpart	unary
19	1	def	macrodef
30	0	delimiters	delimiters
36	92	deltadirection	unary
36	89	deltapoint	unary
36	91	deltapostcontrol	unary
36	90	deltaprecontrol	unary
40	145	direction	ofbinary
40	141	directiontime	ofbinary
71	0	doublepath	thingstoadd
4	3	else	fiorelse
4	4	elseif	fiorelse
19	0	enddef	macrodef
6	0	endfor	iteration
81	0	endgroup	endgroup
5	1	endinput	input
40	162	envelope	ofbinary
28	2	errhelp	message
28	1	errmessage	message
26	4	errorstopmode	mode
2	0	etex	etex
29	0	everyjob	everyjob

8	0	exitif	exittest
13	0	expandafter	expandafter
60	8	expr	parametertype
35	39	false	nullary
4	2	fi	fiorelse
36	103	filled	unary
61	1	firstcontrol	controls
36	78	floor	unary
6	2	for	iteration
6	1	forever	iteration
6	3	forsuffixes	iteration
36	12	greenpart	unary
36	18	greypart	unary
36	106	grouped	unary
36	60	hex	unary
3	1	if	if
57	0	infont	primarydef
23	0	inner	protection
5	0	input	input
16	0	interim	interim
43	39	intersectionprecision	internal
48	136	intersectiontimes	tertiarybinary
48	137	intersectiontimeslist	tertiarybinary
43	3	jobname	internal
43	40	jointolerance	internal
36	48	known	unary
36	63	length	unary
43	38	lessdigits	internal
17	0	let	let
43	31	linecap	internal
43	30	linejoin	internal
36	80	llcorner	unary
36	81	lrcorner	unary
36	15	magentapart	unary
36	56	makenep	unary
36	54	makepath	unary
36	55	makepen	unary
12	0	maketext	maketext
27	1	maxknotpool	onlyset
36	74	mexp	unary
43	33	miterlimit	internal
36	75	mlog	unary
35	161	mpversion	nullary
32	24	nep	typename
18	0	newinternal	newinternal
39	96	nocycle	cycle
36	64	nolength	unary
26	2	nonstopmode	mode

35	44	normaldeviate	nullary
36	50	not	unary
35	41	nullpen	nullary
35	40	nullpicture	nullary
43	2	numberprecision	internal
43	1	numbersystem	internal
32	31	numeric	typename
36	59	oct	unary
36	47	odd	unary
72	0	of	of
48	115	or	tertiarybinary
23	1	outer	protection
43	29	overloadmode	internal
32	30	pair	typename
32	25	path	typename
35	149	pathdirection	nullary
35	154	pathfirst	nullary
35	151	pathindex	nullary
35	155	pathlast	nullary
35	152	pathlastindex	nullary
35	153	pathlength	nullary
36	67	pathpart	unary
35	146	pathpoint	nullary
35	148	pathpostcontrol	nullary
35	147	pathprecontrol	nullary
35	150	pathstate	nullary
43	26	pausing	internal
32	23	pen	typename
35	43	pencircle	nullary
40	156	penoffset	ofbinary
36	68	penpart	unary
32	26	picture	typename
40	142	point	ofbinary
40	144	postcontrol	ofbinary
36	71	postscriptpart	unary
40	143	precontrol	ofbinary
36	70	prescriptpart	unary
60	1	primary	parametertype
19	3	primarydef	macrodef
27	0	randomseed	onlyset
36	45	readfrom	unary
35	42	readstring	nullary
36	11	redpart	unary
43	37	restoreclipcolor	internal
36	52	reverse	unary
32	28	rgbcolor	typename
59	127	rotated	secondarybinary
11	0	runscript	runscript

15	0	save	save
59	129	scaled	secondarybinary
10	0	scantokens	scantokens
26	3	scrollmode	mode
60	2	secondary	parametertype
19	4	secondarydef	macrodef
61	2	secondcontrol	controls
22	40	setbounds	setbounds
22	39	setgroup	setbounds
24	1	setproperty	property
59	130	shifted	secondarybinary
20	0	shipout	shipout
25	2	show	show
25	4	showdependencies	show
25	1	showstats	show
43	27	showstopping	internal
25	0	showtoken	show
25	3	showvariable	show
26	5	silentmode	mode
36	76	sind	unary
59	128	slanted	secondarybinary
36	73	sqrt	unary
43	32	stacking	internal
36	72	stackingpart	unary
74	0	step	step
37	0	str	str
32	22	string	typename
36	104	stroked	unary
40	160	subarclength	ofbinary
40	140	subpath	ofbinary
40	139	substring	ofbinary
60	9	suffix	parametertype
62	0	tension	tension
60	3	tertiary	parametertype
19	5	tertiarydef	macrodef
43	28	texscriptmode	internal
60	10	text	parametertype
43	18	time	internal
73	0	to	to
43	6	tracingcapsules	internal
43	7	tracingchoices	internal
43	9	tracingcommands	internal
43	5	tracingequations	internal
43	11	tracingmacros	internal
43	14	tracingonline	internal
43	12	tracingoutput	internal
43	10	tracingrestores	internal
43	8	tracingspecs	internal

43	13	tracingstats	internal
43	4	tracingtitles	internal
32	27	transform	typename
59	131	transformed	secondarybinary
35	38	true	nullary
43	35	truecorners	internal
36	65	turningnumber	unary
36	82	ulcorner	unary
36	58	uncontrolled	unary
36	53	uncycle	unary
36	79	uniformdeviate	unary
36	49	unknown	unary
75	0	until	until
36	83	urcorner	unary
19	2	vardef	macrodef
1	1	verbatimtex	btex
38	0	void	void
43	34	warningcheck	internal
70	11	withcmykcolor	with
70	15	withcurvature	with
70	8	withgreyscale	with
76	0	within	within
70	12	withlinecap	with
70	13	withlinejoin	with
70	14	withmiterlimit	with
70	5	withnestedpostscript	with
70	4	withnestedprescript	with
70	16	withnothing	with
70	7	withoutcolor	with
70	0	withpen	with
70	3	withpostscript	with
70	2	withprescript	with
70	10	withrgbcolor	with
70	6	withstacking	with
31	0	write	write
39	100	xabsolute	cycle
36	5	xpart	unary
36	87	xrange	unary
39	97	xrelative	cycle
59	133	xscaled	secondarybinary
36	7	xpart	unary
39	102	xyabsolute	cycle
36	8	xypart	unary
39	99	xyrelative	cycle
39	101	yabsolute	cycle
36	16	yellowpart	unary
36	6	ypart	unary
36	88	yrange	unary

39	98	yrelative	cycle
59	134	yscaled	secondarybinary
36	9	yxpart	unary
36	10	yypart	unary
59	135	zscaled	secondarybinary
49	0	{	leftbrace
69	0	}	rightbrace

Variables are of a certain type. Possible variable types are available in `metapost.types` via numeric and verbose keys: 0: undefined, 1: vacuous, 2: boolean, 3: unknownboolean, 4: string, 5: unknownstring, 6: pen, 7: unknownpen, 8: nep, 9: unknownnep, 10: path, 11: unknownpath, 12: picture, 13: unknownpicture, 14: transform, 15: color, 16: cmykcolor, 17: pair, 18: numeric, 19: known, 20: dependent, 21: protodependent, 22: independent, 23: tokenlist, 24: structured, 25: unsuffixedmacro, 26: suffixedmacro.

The possible command codes (as seen in the primitive table) are available in `metapost.codes` via numeric and verbose keys: 0: undefined, 1: btex, 2: etex, 3: if, 4: fiorelse, 5: input, 6: iteration, 7: repeatloop, 8: exittest, 9: relax, 10: scantokens, 11: runscript, 12: maketext, 13: expandafter, 14: definedmacro, 15: save, 16: interim, 17: let, 18: newinternal, 19: macrodef, 20: shipout, 21: addto, 22: setbounds, 23: protection, 24: property, 25: show, 26: mode, 27: onlyset, 28: message, 29: everyjob, 30: delimiters, 31: write, 32: typename, 33: leftdelimiter, 34: begingroup, 35: nullary, 36: unary, 37: str, 38: void, 39: cycle, 40: ofbinary, 41: capsule, 42: string, 43: internal, 44: tag, 45: numeric, 46: plusorminus, 47: secondarydef, 48: tertiarybinary, 49: leftbrace, 50: pathjoin, 51: pathconnect, 52: ampersand, 53: tertiarydef, 54: primarybinary, 55: equals, 56: and, 57: primarydef, 58: slash, 59: secondarybinary, 60: parametertype, 61: controls, 62: tension, 63: atleast, 64: curl, 65: macrospecial, 66: rightdelimiter, 67: leftbracket, 68: rightbracket, 69: rightbrace, 70: with, 71: thingstoadd, 72: of, 73: to, 74: step, 75: until, 76: within, 77: assignment, 78: colon, 79: comma, 80: semicolon, 81: endgroup, 82: stop, 83: undefinedcs.

When you scan for input not all of these make sense, often you will stick to dealing with symbols like brackets, braces, equal signs and variables or expressions.

23.7 Scanners

The most low level scanners are `token` and `symbol`. Although we have them in the `mp.scan` namespace they are just library calls. You use them like:

```
if scan.symbol(true) == "[" then -- "]"
  scan.symbol()
else
  ...
end
```

Here we check if the upcoming token is a specific symbol. The `true` will push back the token. A second boolean argument will enforce expansion.

Scanning can be hairy because the engine is set up in a way that mix lookahead, expand, resolve and processing. So, you can run into a numeric constant, but also in a not yet resolved quantity (take = versus :=). When writing more complex scanners it helps to print codes and types.

The `scan.token` function returns a command, mode and expression type but in practice you only have to consider the first value. Other scanners are `boolean`, `cmykcolor`, `color`, `expression`, `integer`, `next`, `number`, `numeric`, `pair`, `path`, `pen`, `property`, `string`, `transform`, plus some implemented around these. Keep in mind that scanners are bound to an instance so the functions in the `scan` namespace are actually wrappers around the library calls.

Because some tokens trigger further scanning (e.g. expressions) we also have two dedicated sub tables with scanners: `tokenscanners` and `typescanners` where, when indexed with a token (command) or type you get the appropriate scanner to get a real result. When you look at what is built into ConT_EXt you will notice that we often look ahead and then trigger the appropriate scanner. This approach permits to come up with syntaxes that are different than what MetaPost normally does, so for instance brackets and braces can be used to fence parameters and collections, while lists of comma separated numbers can be grabbed that are not part of pairs, triplets, quadruples etc.

23.8 Special helpers

23.8.1 Hashes

This is typically one of the examples that popped up when Alan Braslau and I were exploring the new possibilities. Due to the way MetaPost implements hashes using Lua might turn out to be more efficient. Here are some examples:

```
\startMPcode
%      newhash("foo") ;
tohash("foo","bar","gnu") ;
tohash("foo","rab","ung") ;
fill fullcircle scaled 1cm withcolor "lightgray" ;
draw texttext(fromhash("foo","bar")) ;
draw texttext(fromhash("foo","rab")) rotated 90 ;
disposehash("foo") ;
\stopMPcode
```

In this example we allocate a hash and afterwards get rid of it. When you don't allocate one it will be automatically allocated. Hashes are persistent, so if you want to be sure you start fresh you'd better create one explicitly. And if you use a large one, you'd better clean up afterwards.⁴

```
\startMPcode
resethash("foo")
tohash("foo",1,"gnu") ;
tohash("foo",2,"ung") ;
fill fullcircle scaled 1cm withcolor "lightgray" ;
for i=1 upto 3 :
  if inhash("foo",i) :
    draw texttext(fromhash("foo",i))
```

⁴ In MkXL the `newhash` macro is no longer needed to get a unique index.

```

        rotated ((i-1) * 90) ;
    fi ;
endfor ;
\stopMPcode

```

Here we check if something is present in a hash. This example also demonstrates that we can use numbers as key. And yes, you can also use boolean keys:

```

\startMPcode
    resethash("foo")
    tohash("foo",false,"gnu") ;
    tohash("foo",true,"ung") ;
    fill fullcircle scaled 1cm withcolor "lightgray" ;
    draw texttext(fromhash("foo",false)) ;
    draw texttext(fromhash("foo",true)) rotated 90 ;
\stopMPcode

```

Looking at the implementation of these macros (at the MetaPost end) and functions (at the Lua end) will give you an idea how all these interfaces work together.

23.8.2 Modes

You can query the modes set at the T_EX end. You can also check the systemmode.

```

\enablemode[weird]
\startMPcode
    fill fullsquare xyscaled (TextWidth,5mm)
        withcolor if texmode("weird") : "darkblue" else : "darkgreen" fi ;
\stopMPcode
\disablemode[weird]
\startMPcode
    fill fullsquare xyscaled (TextWidth,5mm)
        withcolor if texmode("weird") : "darkblue" else : "darkgreen" fi ;
\stopMPcode

```

23.8.3 Positions

Keeping track of positions is a core feature and accessible in MetaPosttoo. Here is a somewhat weird example. Positions are always relative to a region, normally the page, but here we provide one via \framed.

```

\framed [region=MyRegion,offset=overlay] \bgroup \hpos {here} \bgroup
\startMPcode
    fill fullcircle scaled 10mm
        withcolor "darkblue" ;

```

```

draw positionxy("here")
  shifted - positionxy("MyRegion")
  withpen pencircle scaled 2mm
  withcolor "darkred" ;
draw positionxy("here")
  shifted - positionxy("MyRegion")
  shifted (wdpart positionwhd("MyRegion"),0)
  withpen pencircle scaled 5mm
  withcolor "darkgreen" ;
\stopMPcode
\egroup \egroup

```

positionanchor	string
positionbox	path using connector --
positioncolumn	numeric
positioncurve	path using connector ..
positiondepth	numeric
positionhangafter	numeric
positionhangindent	numeric
positionheight	numeric
positionhsize	numeric
positionleftskip	numeric
positionllx	numeric
positionlly	numeric
positionlowerleft	pair
positionlowerright	pair
positionpage	numeric
positionparagraph	numeric
positionparindent	numeric
positionpath	path using connector --
positionpx	numeric
positionpxy	pair
positionpy	numeric
positionregion	string
positionrightskip	numeric
positionupperleft	pair
positionupperright	pair
positionurx	numeric
positionury	numeric
positionwhd	(wd,ht,dp)
positionwidth	numeric

Positioning can be tricky. You really need to make sure that the bounding box of the result is right because when it changes, positions also change you get cyclic runs and quite possible graphics that get larger and larger.

23.8.4 T_EX quantities

You can set and get some of T_EX's internal quantities:

```
\scratchdimen=100pt \scratchcounter=250 \scratchtoks={okay} \def\Good{good}
\startMPcode
draw texttext(getdimen("scratchdimen"))    shifted (0cm,0) withcolor "darkblue" ;
draw texttext(getcount("scratchcounter"))  shifted (3cm,0) withcolor "darkred" ;
draw texttext(gettoks ("scratchtoks"))     shifted (6cm,0) withcolor "darkgreen" ;
draw texttext(getmacro("Good"))            shifted (9cm,0) withcolor "darkyellow"
;
\stopMPcode
```

Valid getters are getmacro, getdimen, getcount and gettoks and their counterparts are set... and setglobal.... Instead of names you can use numbers for registers, but don't mess up the system ones:

```
\startMPcode
setdimen(2,2*100pt) setcount(2,2*250) settoks(2,"OKAY") setmacro("Good","GOOD")
draw texttext(getdimen(2))    shifted (0cm,0) withcolor "darkblue" ;
draw texttext(getcount(2))    shifted (3cm,0) withcolor "darkred" ;
draw texttext(gettoks (2))    shifted (6cm,0) withcolor "darkgreen" ;
draw texttext(getmacro("Good")) shifted (9cm,0) withcolor "darkyellow" ;
\stopMPcode
```

23.8.5 UTF8

Because we use an utf8 engine we also have MetaPost accepting that encoding. The normal string primitives are unchanged and operate on (ascii) bytes but we have some additional helpers (and more might show up if needed). Here is an example:

```
\startMPcode
string s ; s := "ÀÁÂÃÄÅàáâãäå" ;
draw texttext(s)          shifted ( 0cm,0) withcolor "darkyellow" ;
draw texttext(utfnum("Â")) shifted ( 3cm,0) withcolor "darkmagenta" ;
draw texttext(utflen(s))  shifted ( 6cm,0) withcolor "darkcyan" ;
draw texttext(utfsub(s,3,4)) shifted ( 9cm,0) withcolor "darkblue" ;
draw texttext(utfsub(s,6))  shifted (12cm,0) withcolor "darkred" ;
\stopMPcode
```

23.8.6 Checkers

There are a couple of checkers, mostly used in modules. Here's are a few that Alan needs for the node module:

```
\startMPcode
```

```

draw image (
  draw texttext(if isarray p[1][2] : "Y__" else : "N__" fi) ;
  draw texttext(if isarray p[1]    : "_Y_" else : "_N_" fi) ;
  draw texttext(if isarray p      : "__Y" else : "__N" fi) ;
) xsize 3cm withcolor "darkred" ;
\stopMPcode

\startMPcode
draw image (
  draw texttext(prefix p[1][2]) shifted (10,0) withcolor "darkred" ;
  draw texttext(prefix p[1]    ) shifted (20,0) withcolor "darkgreen" ;
  draw texttext(prefix p      ) shifted (30,0) withcolor "darkblue" ;
) ysize 12mm ;
\stopMPcode

\startMPcode
draw image (
  draw texttext(dimension p[1][2]) shifted (10,0) withcolor "darkred" ;
  draw texttext(dimension p[1]    ) shifted (20,0) withcolor "darkgreen" ;
  draw texttext(dimension p      ) shifted (30,0) withcolor "darkblue" ;
) ysize 12mm ;
\stopMPcode

\startMPcode
picture p ; p := texttext("some text") ;
path q ; q := fullcircle scaled 3cm ;
draw texttext(tostring(isobject(p))) withcolor "darkgreen" ;
draw texttext(tostring(isobject(q))) shifted (50,0) withcolor "darkblue" ;
\stopMPcode

```

23.8.7 Key-value interfaces

There are plenty of examples in the `mp-lmtx.mpxl` file and more will be added. Just make sure you create your own unique namespace and don't use the ones that ConT_EXt uses (like `lmt_`).

24 Interface

24.1 Macros

Because graphic solutions are always kind of personal or domain driven it makes not much sense to cook up very generic solutions. If you have a project where MetaPost can be of help, it also makes sense to spend some time on implementing the basics that you need. In that case you can just copy and tweak what is there. The easiest way to do that is to make a test file and use:

```
\startMPpage
  % your code
\stopMPpage
```

Often you don't need to write macros, and standard drawing commands will do the job, but when you find yourself repeating code, a wrapper might make sense. And this is why we have this key/value interface: it's easier to abstract your settings than to pass them as (expression or text) arguments to a macro, especially when there are many.

You can find many examples of the key/value driven user interface in the source files and these are actually not that hard to understand when you know a bit of MetaPost and the additional macros that come with MetaFun. In case you wonder about overhead: the performance of this mechanism is pretty good.

Although the parameter handler runs on top of the Lua interface, you don't need to use Lua unless you find that MetaPost can't do the job. I won't give examples of coding because I think that the source of MetaFun provides enough clues, especially the file `mp-lmtx.mpxl`. As the name suggests this is part of the ConT_EXt version LMTX, which runs on top of LuaMetaT_EX. I leave it open if I will backport this functionality to LuaT_EX and therefore MkIV.

An excellent explanation of this interface can be found at:

<https://adityam.github.io/context-blog/post/new-metafun-interface/>

So (at least for now) here I can stick to just mentioning the currently stable interface macros:

<code>presetparameters</code>	<code>name [...]</code>	Assign default values to a category of parameters. Sometimes it makes sense not to set a default, because then you can check if a parameter has been set at all.
<code>applyparameters</code>	<code>name macro</code>	This prepares the parameter handler for the given category and calls the given macro when that is done.
<code>getparameters</code>	<code>name [...]</code>	The parameters given after the category name are set.
<code>hasparameter</code>	<code>names</code>	Returns true when a parameter is set, and false otherwise.
<code>hasoption</code>	<code>names options</code>	Returns true when there is overlap in given options, and false otherwise.

<code>getparameter</code>	<code>names</code>	Resolves the parameter with the given name. because a parameter itself can have a parameter list you can pass additional names to reach the final destination.
<code>getparameterdefault</code>	<code>names</code>	Resolves the parameter with the given name. because a parameter itself can have a parameter list you can pass additional names to reach the final destination. The last value is used when no parameter is found.
<code>getparametercount</code>	<code>names</code>	Returns the size if a list (array).
<code>getmaxparametercount</code>	<code>names</code>	Returns the size if a list (array) but descends into lists to find the largest size of a sublist.
<code>getparameterpath</code>	<code>names string boolean</code>	Returns the parameter as path. The optional string is one of <code>--</code> , <code>..</code> or <code>...</code> and the also optional boolean will force a closed path.
<code>getparameterpen</code>	<code>names</code>	Returns the parameter as pen (path).
<code>getparameterertext</code>	<code>names boolean</code>	Returns the parameter as string. The boolean can be used to force prepending a so called <code>\strut</code> .
<code>pushparameters</code>	<code>category</code>	Pushed the given (sub) category onto the stack so that we don't need to give the category each time.
<code>popparameters</code>		Pops the current (sub) category from the stack.

Most commands accept a list of strings separated by one or more spaces, The resolved will then stepwise descend into the parameter tree. This means that a parameter itself can refer to a list. When a value is an array and the last name is a number, the value at the given index will be returned.

```
"category" "name" ... "name"
```

```
"category" "name" ... number
```

The `category` is not used when we have pushed a (sub) category which can save you some typing and also is more efficient. Of course than can mean that you need to store values at a higher level when you need them at a deeper level.

There are quite some extra helpers that relate to this mechanism, at the MetaPost end as well as at the Lua end. They aim for instance at efficiently dealing with paths and can be seen at work in the mentioned module.

There is one thing you should notice. While MetaPost has numeric, string, boolean and path variables that can be conveniently be passed to and from Lua, communicating colors is a bit of a hassle. This is because `rgb` and `cmyk` colors and gray scales use different types. For this reason it is strongly recommended to use strings that refer to predefined colors instead. This also enforces consistency with the \TeX end. As convenience you can define colors at the MetaFun end.

`\startMPcode`

```
definecolor [ name = "MyColor", r = .5, g = .25, b = .25 ]
```

```
fill fullsquare xyscaled (TextWidth,5mm) withcolor "MyColor" ;
```

\stopMPcode

24.2 Units

Many dimensions used at the $\text{T}_{\text{E}}\text{X}$ end are also available in MetaFun. Examples are `TextWidth`, `EmHeight` and `StrutHeight`. In MkIV they are numeric variables that get set every graphic but in MkXL these are not numeric variables but (hidden) Lua calls so they can't be set at the MetaPost end; but they are injected as numeric quantities so you can efficiently them in calculations.

In MetaPost examples you often find `u` being used as unit, like:

```
u := 1cm ; draw (u,0) -- (u,u) -- (3u,0);
```

However, what if you want to set such a unit at the $\text{T}_{\text{E}}\text{X}$ end? For this purpose we have a dedicated variable, which is demonstrated in the following examples. First we set a variable:

```
\uunit=1cm
```

\startMPcode

```
definecolor [ name = "MyColor", r = .5, g = .25, b = .25 ]
```

```
fill fullsquare xyscaled (TextWidth,5mm) withcolor "MyColor" ;
```

\stopMPcode

and next we apply it:

```
\framed[offset=.2uu,strut=no]
```

```
\bgroup
```

\startMPcode

```
fill fullcircle scaled (2uu) withcolor "darkblue" ;
```

```
fill fullcircle scaled (8mm) withcolor "middlegray" ;
```

\stopMPcode

```
\egroup
```

The `\uunit` dimension register is hooked into $\text{T}_{\text{E}}\text{X}$'s unit parser as type `uu` (user unit). At the MetaPost end `uu` is effectively a Lua call that fetches the of the dimension from the $\text{T}_{\text{E}}\text{X}$ end and presents it a a numeric.



When we set

```
\uunit=5mm
```

The same code gives::



```
\framed[offset=.1uu,strut=no]
```

```
\bgroup
```

\startMPcode

```

    save uu ; numeric uu ; uu := 5mm ;
    fill fullcircle scaled (3uu) withcolor "darkred" ;
    fill fullcircle scaled (2uu) withcolor "middlegray" ;
\stopMPcode
\egroup

```

This demonstrates that we can overload uu but make sure to save it first so that later it is available again.

□

24.3 Paths from LUA

Passing paths to MetaPost using specific properties is sort of tricky because once the points are set, the solver will be applied. This translates curls, tensions and/or explicit control points into the final control points.

In the next example we show a few interfaces. Not all of that might be perfect yes but in most cases it works out.

```

\startluacode
  local shapes = { }
  shapes[1] = { {0,0}, {-1,-1}, {-1, 0}, {0,0}, "cycle" }
  shapes[2] = { {0,1}, { 1, 0}, { 1,-1}, {0,1}, "cycle" }
  shapes[3] = { {0,2}, { 2, 0}, { 2, 1}, {0,2}, "cycle" }
  shapes[4] = {
    {0,0}, {-1,-1}, {-1, 0}, {0,0}, "cycle", "append",
    {0,1}, { 1, 0}, { 1,-1}, {0,1}, "cycle", "append",
    {0,2}, { 2, 0}, { 2, 1}, {0,2}, "cycle", "append",
  }
  shapes[5] = {
    { path = shapes[1], append = true },
    { path = shapes[2], append = true },
    { path = shapes[3], append = true },
  }
  function mp.getshapepath(n)
    mp.inject.path(shapes[n])
  end
\stopluacode

\startMPcode
  path p ;
  p := lua.mp.getshapepath(1) scaled 1cm ;
  draw p withpen pencircle scaled 2pt withcolor red ;
  p := lua.mp.getshapepath(2) scaled 1cm ;
  draw p withpen pencircle scaled 2pt withcolor blue ;
  p := lua.mp.getshapepath(3) scaled 1cm ;
  draw p withpen pencircle scaled 2pt withcolor green ;
  p := lua.mp.getshapepath(4) scaled 1cm &&cycle ;
  fill p withcolor 0.9 ;
  draw p withpen pencircle scaled 1pt withcolor 0.7 ;

```

```

    p := lua.mp.getshapepath(5) scaled 1cm ;
    draw p withpen pencircle scaled .25pt withcolor 0.2 ;
\stopMPcode

```

Especially cycling and appending needs to be done precisely in order not to get redundant (or bad) points.

This combines the first three paths similar to the fourth and fifths. If you doubt what you get you can always show the path and look for {begin} and {end} indicators.

```

\startMPcode
    path p ;
    p := lua.mp.getshapepath(1) scaled 1cm &&
        lua.mp.getshapepath(2) scaled 1cm &&
        lua.mp.getshapepath(3) scaled 1cm ;
    draw p withpen pencircle scaled 1pt withcolor 0.7 ;
    % show(p);
\stopMPcode

```

We draw the result and see that they are decoupled indeed thanks to some && magic: